

Wireless presentation USB-C dongle

The wireless presentation dongle allows to share content (e.g. videos, applications) from your computer to an iiyama (i)LFD with the pre-installed EShare app . It is compatible with computers equipped with USB-C (DP-Alt mode) and supports smooth video streaming up to 4K.


To use the dongle you need to pair it with the Android receiver. The included USB Type-C to A adapter can be used if the Android receiver doesn't have a Type-C connection.

01 DEVICE

| | |
|-------------------------|---|
| Supported platforms | Windows, MAC, Chrome, Any OS which supports full feature Type-C |
| DisplayPort Out | x1 (1.2, complies with HDCP) |
| Audio | stereo, radio quality 16bits 48kHz |
| Frame rate | Up to 60 fps depending on environment (FHD) and 30 fps for 4K |
| Output resolution | 720x480, 720x576, 1280x720, 1920x1080(1080P), 3840x2160@30Hz |
| Features | Included: USB type-C to A adapter (to pair devices) |
| Input resolution | Video: 480p, 576p, 720p, 1080p |
| Wireless | IEEE 802.11n, 5GHz |
| Data rate wireless | up to 300Mbps |
| Authentication protocol | WPA2 (WPA2-PSK (Pre-Shared key) / WPA2-Enterprise) |
| Security (encryption) | WPA2 |
| Reach | 20 m max. |

02 SPECIFIKACE

| | |
|----------|--|
| Barva | stříbrná, černá |
| Software | Connects with EShare app version 7.3 and higher. |

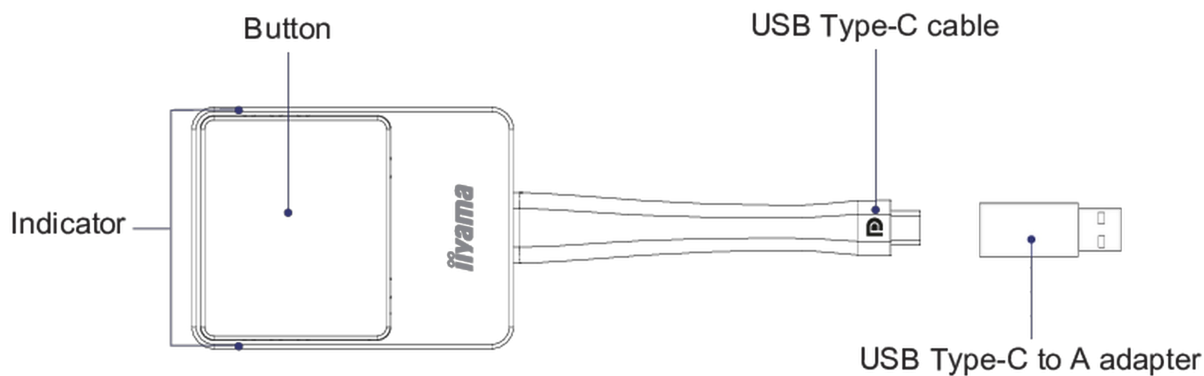

03 POWER-MANAGEMENT


| | |
|-----------------|--------------|
| Napájecí zdroj: | externí |
| Odběr energie: | 4.5W typisch |

04 UDRŽITELNOST

| | |
|----------|-------------------------------|
| Předpisy | CE, RoHS support, WEEE, REACH |
|----------|-------------------------------|

05 ROZMĚRY / HMOTNOST

| | |
|---------------------------|------------------|
| Rozměry výrobku Š x V x D | 57 x 175 x 17mm |
| Rozměry balení Š x V x D | 100 x 123 x 33mm |
| Váha (bez balení) | 0.81kg |
| Váha (s balením) | 0.217kg |
| EAN code | 4948570032891 |

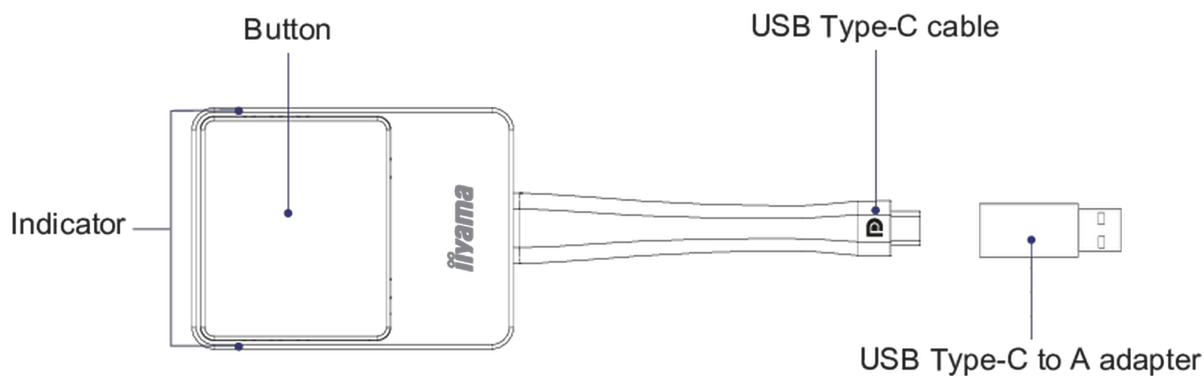

06 ENVIRONMENTAL CONDITIONS

| | |
|-------------------------|---------------|
| Rozsah provozní teploty | 0°C - 40°C |
| Operation humidity | 10% - 80% |
| Rozsah teploty v klidu | - 10°C - 60°C |
| Storage humidity | 5% - 90% |

Všechny ochranné známky jsou registrovány a chráněny. Vyhrazené právo na změny. Veškeré ploché panely LCD splňují normu ISO-9241-307:2008 v oblasti počtu vadných pixelů.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED