



## 24" 3-side borderless monitor featuring IPS (In-Plane-Switching) panel with a 16:10 aspect ratio and height-adjustable stand


Providing excellent performance for graphics applications in CAD, and ideal for Universities, Corporate and Financial Markets. The ProLite XUB2495WSU-B7 features an IPS panel offering accurate and consistent colour reproduction with wide viewing angles. The 1920 x 1200 native screen resolution and a 150mm height-adjustable stand featuring pivot and swivel functions deliver great versatility and comfort of use.

Available also with fixed stand : [ProLite XU2495WSU-B7](#)



### IPS Technology

IPS technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.



### HAS (150mm) + Pivot (rotation both sides)

With a height adjustable stand you will create an ergonomic work posture and position that meets all health and safety requirements. This will not only prevent any health issues but will also increase your productivity. The pivot function allows the screen to rotate from landscape to portrait orientation. This functionality can be useful if the application requires more height than width.

## 01 DISPLAY CHARACTERISTICS

|                     |   |
|---------------------|---|
| Design              | 3-side borderless   |
| Diagonal            | 24.1", 61.1cm   |
| Panel               | IPS (In-Plane-Switching), matte finish                                |
| Native resolution   | 1920 x 1200 @75Hz (2.3 megapixel)                                     |
| Aspect ratio        | 16:10   |
| Panel brightness    | 300 cd/m <sup>2</sup>   |
| Static contrast     | 1000:1  |
| Advanced contrast   | 80M:1   |
| Response time (GTG) | 4ms   |
| Viewing zone        | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support      | 16.7mIn (sRGB: 99%; NTSC: 72%)  |
| Horizontal Sync     | 60 - 95kHz  |
| Viewable area W x H | 518.4 x 324mm, 20.4 x 12.8"   |
| Pixel pitch         | 0.27mm  |
| Colour              | matte, black  |

## 02 INTERFACES / CONNECTORS / CONTROLS

|                     |  |
|---------------------|--|
| Signal input        | HDMI x1 (v.1.4)<br>DisplayPort x1 (v.1.2)                |
| USB HUB             | x4 (3x v.3.2 Gen 1 (5Gbps, 4.5W) 1x Type C (5Gbps, 15W)) |
| HDCP                | yes  |
| Headphone connector | yes  |

## 03 FEATURES

|                    |  |
|--------------------|--|
| Blue light reducer | yes  |
| Flicker free       | yes  |
| Extra              | i-Style colour   |
| OSD languages      | EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL,  |
| Control buttons    | Joystick/Power Button: Power/Menu, Up/Input Select, Down, Right/Volume, Left/Submenu   |
| User controls      | picture adjust (brightness, contrast, ECO, ACR, OD, blue light reducer, X-Res technology), colour settings (6-Axis, i-Style colour, colour temp.), OSD settings (OSD H. position, OSD V. position, OSD rotate, OSD time, OSD background, DDC/CI, information), language, recall, miscellaneous (sharp and soft, video mode adjust, opening logo, LED, RGB range), input select (source), audio settings (volume, mute) |
| Speakers           | 2 x 2W   |
| Convenience        | Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OSX  |

## 04 MECHANICAL

|                              |   |
|------------------------------|---|
| Display position adjustments | height, swivel, tilt, pivot (rotation both sides) |
| Height adjustment            | 150mm   |
| Rotation (PIVOT function)    | 90°   |
| Swivel stand                 | 90°; 45° left; 45° right                          |
| Tilt angle                   | 23° up; 5° down                                   |
| VESA mounting                | 100 x 100mm                                       |

|                         |     |
|-------------------------|-----|
| Cable management system | yes |
|-------------------------|-----|

05

ACCESSORIES INCLUDED

|        |                                 |
|--------|---------------------------------|
| Cables | power, USB, HDMI                |
| Other  | quick start guide, safety guide |

06

POWER MANAGEMENT

|                   |   |
|-------------------|---|
| Power supply unit | internal                                  |
| Power supply      | AC 100 - 240V, 50/60Hz                    |
| Power usage       | 17W typical, 0.5W stand by, 0.3W off mode |

07


SUSTAINABILITY

|   |   |
|---|---|
| Regulations   | TCO Certified, CE, TÜV-GS, EAC, PSE, RoHS support, ErP, WEEE, VCCI, REACH, UKCA |
| Energy efficiency class (Regulation (EU) 2017/1369) | D   |
| REACH SVHC  | above 0.1%: Lead  |

08

DIMENSIONS / WEIGHT

|                              |                             |
|------------------------------|-----------------------------|
| Product dimensions W x H x D | 533.5 x 371 (521) x 209.5mm |
| Box dimensions W x H x D     | 613 x 437 x 130mm           |
| Weight (without box)         | 5.1kg                       |
| Weight (with box)            | 6.6kg                       |
| EAN code                     | 4948570123827               |

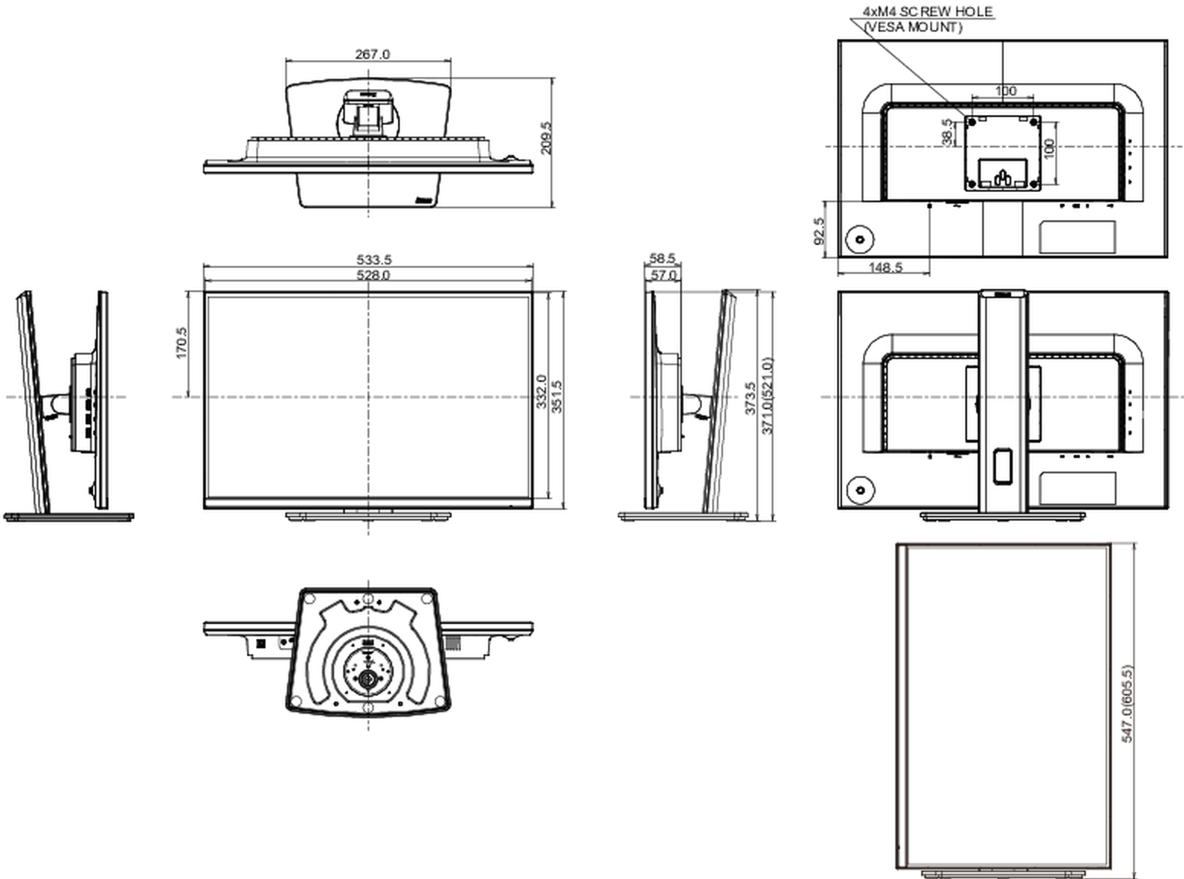

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED