
iiyama

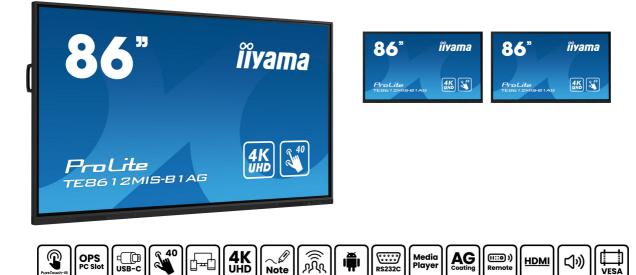

86" Interactive 4K LCD Touchscreen with integrated annotation software

Collaboration for education and enterprise made simple. The TE8612MIS-B1AG from iiyama inspires all possibilities in all stages for education, start-up and large-scale businesses. With our hybrid interactive solution, you can smoothly annotate in 4K and control any content on the display from any source.

This PureTouch-IR 40-point Touchscreen with iiWare 10 (Android 11 OS) features Note, Browser, Cloud Drive and the option for you to sideload relevant apps you require for your organisation. It comes with dual functionTouch pens, and you can easily save your notes and on-screen content directly to a USB device, 32GB internal memory or a selected cloud drive. Including an additional USB-C connection, the display supports the latest in video, audio and Touch signal via a single port and even charge your device with 65W power delivery.

With a 4K UHD resolution (3840x2160) and 400cd/m² brightness this 86" IPS LCD screen provides vibrant, detailed, and highquality images from anywhere in the class or meeting room. The anti-glare coating drastically reduces ambient reflection in high-brightness environments without compromising the sharpness and clarity of the image.

You can be sure that no matter what your Interactive aspiration, iiyama has the simplified solution just for you. Boasting a new 4K Interface with User Profiles for simple login and access to your very own bespoke menu and Cloud Drives, the TE8612MIS-B1AG becomes a highly personalised device within a busy hybrid environment for multiple users.

Share, stream and edit content from any device directly on screen and transform your team meetings or lessons into an easy, fast and seamless interactive session with the included WiFi module (<u>OWM002</u>), ScreenSharePro and EShare app.





PureTouch-IR

Delivers 1mm Touch accuracy for the smoothest and fastest annotation with 40pt infrared Touch technology.

iiWare 10 features Note, Browser, Cloud Drive and the option for you to sideload relevant apps you require for your organisation.

DISPLAY CHARACTERISTICS

Diagonal85.6", 217.4cmPanelIPSTouch GlassAG coated glass, zero air-gapNative resolution3840 x 2160 (8.3 megapixel 4K UHD)Aspect ratio16:9	
Touch GlassAG coated glass, zero air-gapNative resolution3840 x 2160 (8.3 megapixel 4K UHD)	
Native resolution 3840 x 2160 (8.3 megapixel 4K UHD)	
Aspect ratio	
Aspect ratio 16:9	
Panel brightness 400 cd/m²	
Light transmittance 92%	
Static contrast 1200:1	
Dynamic contrast 4000:1	
Response time (GTG) 8ms	
Viewing zone horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down	n: 89°/89°
Colour support 1.07B 8bit+FRC	
Horizontal Sync 30 - 135kHz	
Viewable area W x H 1895 x 1066mm, 74.6 x 42"	
Bezel width (sides, top, bottom) 16.5mm, 16.5mm, 31mm	
Pixel pitch 0.4935mm	
Bezel colour and finish black, matte	

02

TOUCH

Touch technology	PureTouch-IR
Touch points	40, 5pt writing (HID, only with supported OS)
Touch accuracy	+- 1.5mm
Touch method	stylus, finger, glove
Touch interface	USB
Supported operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.

INTERFACES / CONNECTORS / CONTROLS 03

Analog signal input	VGA x1 (max. 1920x1080 @60Hz)
Digital signal input	HDMI x3 (v.2.0, max. 3840x2160 @60Hz, YUV444) USB-C x1 (3.1, 3840x2160 @60Hz - RGB444 - (65W charging, Touch)
Audio input	Mini jack x1
Monitor control input	RS-232c x1 RJ45 (LAN) x1 IR x1
Digital signal output	HDMI x1 (3840x2160 @60Hz)
Audio output	S/PDIF (Optical) x1 Mini jack x1 Speakers 2 x 16W (Front)
HDCP	HDMI 1: 2.1, USB-C: 2.2
USB ports	x5 (media playback / peripherals / storage – front side: 2x 3.0, 1x USB-C 3.1 (65W PD), right side: 2x 3.0)
RJ45 (LAN)	x2 (Auto switch for PC & Android, 1000MB)

04 FEATURES

22.02.2025 09:24:49

Integrated software	iiWare 10 (Android 11 OS) featuring iiyama DMS, Note, web browser, file manager, cloud drives, WPS office, iiyama Share and EShare for wireless connection with Windows/iOS/Android devices
WiFi	yes (WiFi Module OWM002 - Dual WiFi Bandwidth: 2.4GHz/5GHz, WiFi Standard: IIEEE 802.11 a/b/g/n/ac, Bluetooth Support: 2.1/3.0/4.2/5.0)
Hardware	Quad core A55 CPU, Mali G52 GPU, 4GB RAM, 32GB internal memory
Extra	WiFi Module (OWM002), Slot for optional OPS Slot PC, 4x Touch pen
Kiosk mode	yes
Max. non-stop operating time	24/7
Media playback	yes
Glass thickness	3mm
Glass hardness	7H
Housing (bezel)	metal
OSD key lock	yes

05 GENERAL

OSD languages	EN, DE, FR, ES, IT, RU, CZ, NL, PL
Control buttons	Power, Power Indicator, Remote Sensor, Light Sensor
User controls	general settings (input, volume, backlight), audio settings (volume, bass, treble, balance, sound mode, mute), screen settings (aspect ratio, pixel shift), display settings (brightness, contrast, hue, sharpness, display mode, colour temp.), adjust settings (H-position, V-position, clock, phase, auto), settings (wireless & networks, personal, input & output, application, system)
Blue light reducer	yes
Plug&Play	DDC2B
Warranty	5 years (for details and eligible countries please check the Warranty section of our website)

06 MECHANICAL

Orientation	landscape
Fanless design	yes
VESA mounting	800 x 600mm
Operation temperature range	0°C - 40°C
Storage temperature range	- 20°C - 60°C
MTBF	50.000 hours (excluding backlight)

07 ACCESSORIES INCLUDED

Cables	power, USB, HDMI
Touch pen	x4
Guides	quick start guide, safety guide
Other	WiFi Module (OWM002), Mounting bracket for NUC, Mounting bracket for webcam
Remote control	yes (batteries included)


08 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	215W typical, 0.5W stand by, 0.3W off mode

09 SUSTAINABILITY

Regulations	CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH (RoHS)
REACH SVHC	above 0.1%: Lead
10 DIMENSIONS / WEIGHT	

Product dimensions W x H x D	1957 x 1160 x 100mm
Box dimensions W x H x D	2110 x 1283 x 225mm
Weight (without box)	58.6kg
Weight (with box)	75.9kg
EAN code	4948570121854





© IIYAMA CORPORATION. ALL RIGHTS RESERVED