



### 32" Full HD monitor za Profesionalno Digitalno Oglašavanje sa 24/7 radnim vremenom i sa Android OS-om i FailOver-om

Elevate your visual communication with the LH3260HS-B1AG and unlock the new possibilities for your business. This 500cd/m<sup>2</sup> high brightness display is a powerful business tool that takes your marketing and communication efforts to the next level. With its Android 11 OS, [iiSignage<sup>2</sup>](#) content management software, Signal FailOver and [EShare](#) features, this display offers a straightforward user experience, making content creation, management, and sharing a breeze.

This ELED VA display consumes significantly less power compared to DLED IPS while maintaining the same level of brightness. Its versatile orientation, sleek design, and 24/7 reliability ensure it seamlessly integrates into any business environment. Whether it's used in retail, corporate, hospitality, or educational settings, the LH3260HS-B1AG will undoubtedly captivate your audience and leave a lasting impression.



Android OS

Zahvaljujući Android operativnom sistemu, ekran možete lako prilagoditi svojim potrebama instaliranjem aplikacija direktno na njega.



iiSignage<sup>2</sup>

iiSignage<sup>2</sup> je naša platforma za upravljanje sadržajem digitalnog oglašavanja koja lako prikazuje i kontroliše vaš sadržaj i upravlja vašim ekranima. Sistem za upravljanje sadržajem (CMS) vam daje potpunu kontrolu nad vašim porukama i oglašavanjem bezbedno i na daljinu.

## 01 KARAKTERISTIKE EKRANA

Dizajn	Tanki okvir
Dijagonala	31.5", 80cm
Panel	VA, presvučeno staklo za smanjenje odsjaja, mat završna obrada, hard coating (3H), haze 25%
Osnovna rezolucija	1920 x 1080 @60Hz (21 Megapiksel, Full HD)
Osnovna rezolucija	60Hz
Format ekrana	16:9
Osvetljenje	500 cd/m <sup>2</sup>
Statički kontrast	4000:1
Vreme odziva (GTG)	8ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	16.7miliona 8bit (+FCR, NTSC 87%)
Horizontalna sinhronizacija	28 - 160KHz
Vidljiva površina Š x V	698.4 x 392.85mm, 27.5 x 15.5"
Širina okvira (stranice, vrh, dno)	9mm, 9mm, 9mm
Razmak piksela	0.364mm
Boja okvra	crna, mat

## 02 KONEKTORI / KONTROLE

Ulaz digitalnog signala	HDMI x3 (v.2.0, max. 1920x1080 @60Hz)
Kontrolni ulaz	RS-232c x1 RJ45 (LAN) x1 IR x1
Audio izlaz	Mini konektor x1 Zvučnici 2 x 10W
HDCP	v.1.4 & 2.2
USB portovi	x2 (v.2.0)

## 03 KARAKTERISTIKE

Integrirani softver	Android 11 OS, iiSignage <sup>2</sup> , FailOver, EShare
WiFi	da (Ugradni, 802.11ac)
Hardver	CPU: A53*4, GPU: G52 MP2, RAM: 2GB, ROM: 16GB
Dodatno	Wall mounting kit included (VESA 150x200mm)
Maksimalno neprekidno radno vreme	24/7
Protiv zadržavanja slike	da
Reprodukcija medija	da
Kućište (okvir)	plastika

## 04 OPŠTE

OSD jezici	EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL, SV, FI, DA, NB
Kontrolni tasteri	Power button, Power Indicator, Remote Sensor

## Korisničke kontrole

picture (brightness, contrast, sharpness, black level, tint, colour, noise reduction, gamma selection, colour temperature, colour control, over scan, picture reset), screen (zoom mode, custom zoom, screen reset), Audio (balance, treble, bass, volume, audio out, maximum volume, minimum volume, mute, audio out sync, speaker setting, audio reset), configuration 1 (switch on state, panel saving, RS232-routing, boot on source, WOL, configuration 1 reset, factory reset), Configuration 2 (OSD timeout, OSD H-Position, OSD V-position, system rotation, information OSD, logo and animation logo setting, animation setting, monitor ID, monitor information, HDMI version, configuration 2 reset), advanced option (IR control, off timer, schedule, HDMI with one wire, HDMI with one wire power off, FailOver, language, OSD transparency, power saving, advanced option reset), Android settings (network & internet, apps & notifications, display, signage display, security, language & input, date & time, about device)

## Plug&Play

DDC2B

## 05 MEHANIČKI

### Orijentacija

pejzaž, portret

### Dizajniran bez ventilatora

da

### VESA montiranje

150 x 200mm

### Opseg radne temperature

0°C - 40°C

### Temperatura skladištenja

- 20°C - 60°C

### MTBF - Prosecno vreme izmedju kvarova

50.000 sati (izuzimajući pozadinsko osvetljenje)

## 06 UKLJUČENI DODACI

### Kablovi

Strujni kabl, HDMI, RS-232c

### Upustva

kratko uputstvo, bezbednosni vodič

### Ostalo

Wall mount bracket, Wall mount guide, Screws, Screw anchors, Stickers for screw holes

### Daljinski upravljač

da (baterije uključene)

## 07 UPRAVLJANJE NAPAJANJEM

### Napajanje

interna

### Potrošnja energije

% 1W tipično, 0.5W stand by, 0.3W iskljucen

## 08 ODRŽIVOST

### Propisi

CB, CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, REACH, UKCA

### Klasa energetske efikasnosti (Regulation (EU) 2017/1369)

G

## 09 DIMENZIJE / TEŽINA

### Dimenzije proizvoda Š x V x D

724.6 x 419.8 x 40mm

### Dimenzije kutije Š x V x D

795 x 520 x 115mm

### Težina (bez kutije)


5.4kg

### Težina (sa kutijom)

7.3kg

### EAN kod

4948570122288

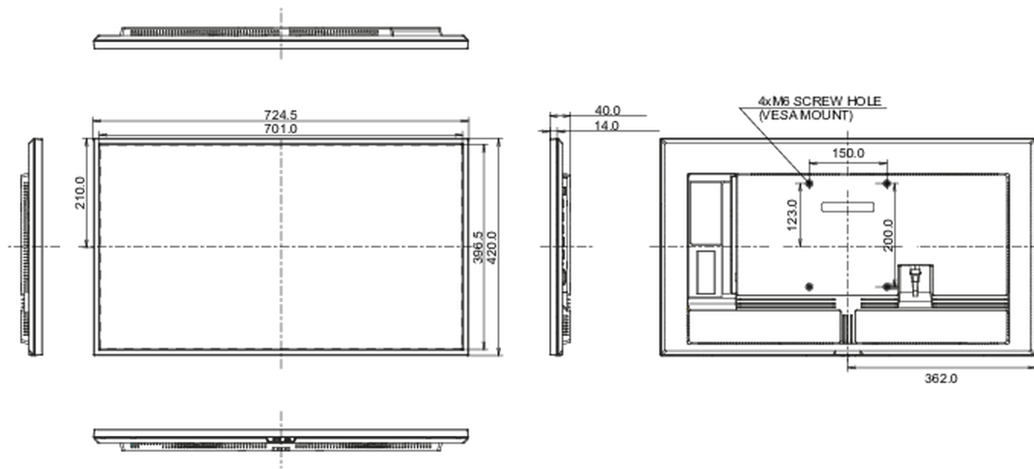

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED