



24" IPS technology panel with height adjustable stand

Stylish edge-to-edge design makes the ProLite XU2492HSU perfect for multi-monitor set-ups. The IPS panel technology offers accurate and consistent colour reproduction with wide viewing angles. The 100Hz refresh rate together with AdaptiveSyncfunction provides an instant, tangible improvement in image smoothness. High contrast and brightness values mean the monitor will provide excellent performance for photographic and web design. Equipped with speakers, 2 port USB 3.2 hub, headphone socket, HDMI and DisplayPort connections, plus a blue light reducer function to reduce eye fatigue for optimal user comfort, make this 24" monitor a great choice for both multi-monitor configuration and office applications.

Szintén elérhető állítható magasságú állvánnyal : [ProLite_XUB2492HSU-B6 \(1920x1080\)](#) és [ProLite_XUB2492QSU-B1 \(2560x1440\)](#).



100Hz

A 100Hz refresh rate translates into increased smoothness of the image. This means that flickering is reduced and therefore eye fatigue is also less noticeable. The increased frequency also means smoother transitions between contrasting colours, smoother motion scenes in both movies and gaming, and even reduced mouse cursor flickering.

01 KIJELZŐ JELLEMZŐI

| | |
|-----------------------------|--|
| Design | 3-side borderless |
| Átló | 23.8", 60.5cm |
| Panel | IPS Panel Technology LED, matte finish |
| Natív felbontás | 1920 x 1080 @100Hz (2.1 megapixel Full HD) |
| Képarány | 16:9 |
| Fényerő | 250 cd/m ² |
| Statikus kontraszt | 1300:1 |
| Speciális kontraszt | 80M:1 |
| Válaszidő (MPRT) | 0.4ms |
| Látótér | horizontális/vertikális: 178°/178°, jobb/bal: 89°/89°, fel/le: 89°/89° |
| Szín támogatás | 16.7mln (sRGB: 99%; NTSC: 72%) |
| Horizontális szinkronizálás | 30 - 115kHz |
| Látható terület Sz x M | 527 x 296.5mm, 20.7 x 11.7" |
| Pixel magasság | 0.275mm |
| Szín | mattn, fekete |

02 INTERFÉSZEK / CSATLAKOZÓK / VEZÉRLŐK

| | |
|----------------------|--|
| Jelbemenet | HDMI x1 DisplayPort x1 |
| USB HUB | x4 (v. 3.2 Gen 1 (5Gbps, DC5V, 900mA)) |
| HDCP | igen |
| Hangszóró csatlakozó | igen |

03 JELLEMZŐK

| | |
|-------------------------|---|
| Kéfény csökkentés | igen |
| Villogásmentes | igen |
| Adaptive Sync támogatás | igen |
| Extra | i-Style colour |
| OSD nyelvek | EN, DE, FR, ES, IT, PT, RU, JP, CZ, NL, PL |
| Vezérlőgombok | Signal Select / Exit, + / Volume, - / Eco +, Menu , Power |
| Felhasználói vezérlők | picture adjust (contrast, brightness, i-Style colour, ACR, Eco, OD, X-Res technology), image settings (blue light reducer, sharp&soft, video mode adjust), colour settings (gamma, 6-axis, colour temp.), audio settings (volume, mute), OSD settings (OSD H. position, OSD V. position, OSD time, language), extra1 (MBR, AdaptiveSync, USB BC), extra2 (reset, DDC/CI, signal select, HDMI range, opening logo, LED, information) |
| Hangszórók | 2 x 2W |
| Kényelem | Kensington-lock™ előkészítve, DDC2B, Mac OSX |

04 MECHANIKUS

| | |
|---------------------------------|----------------|
| Kijelző helyzetének beállításai | billenthető |
| Hajlásszög | 22° fel; 2° le |
| VESA állvány | 100 x 100mm |
| Kábelkezelő rendszer | igen |

05 TARTOZÉKOKAT TARTALMAZZA

Kábelek

áramellátás, USB, HDMI, DP

Egyéb

gyors üzembe helyezési útmutató, biztonsági útmutató

06 ENERGIAGAZDÁLKODÁS

Tápegység

belső

Áramellátás

AC 100 - 240V, 50/60Hz

Áramfogyasztás

0.5W készenlét

07 FENNTARTHATÓSÁG

Előírások

TCO Certified, CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS támogatás, ErP, WEEE, HATÓTÁVOLSÁG, UKCA

REACH SVHC

0,1% felett: Vezet

08 MÉRETEK / SÚLY

Termék méretei Sz x H x M

539.5 x 415 x 199.5mm

Doboz méretei Sz x H x M

610 x 410 x 130mm

Súly (doboz nélkül)


3,4kg

Súly (dobozzal)

4.9kg

EAN kód

4948570122585

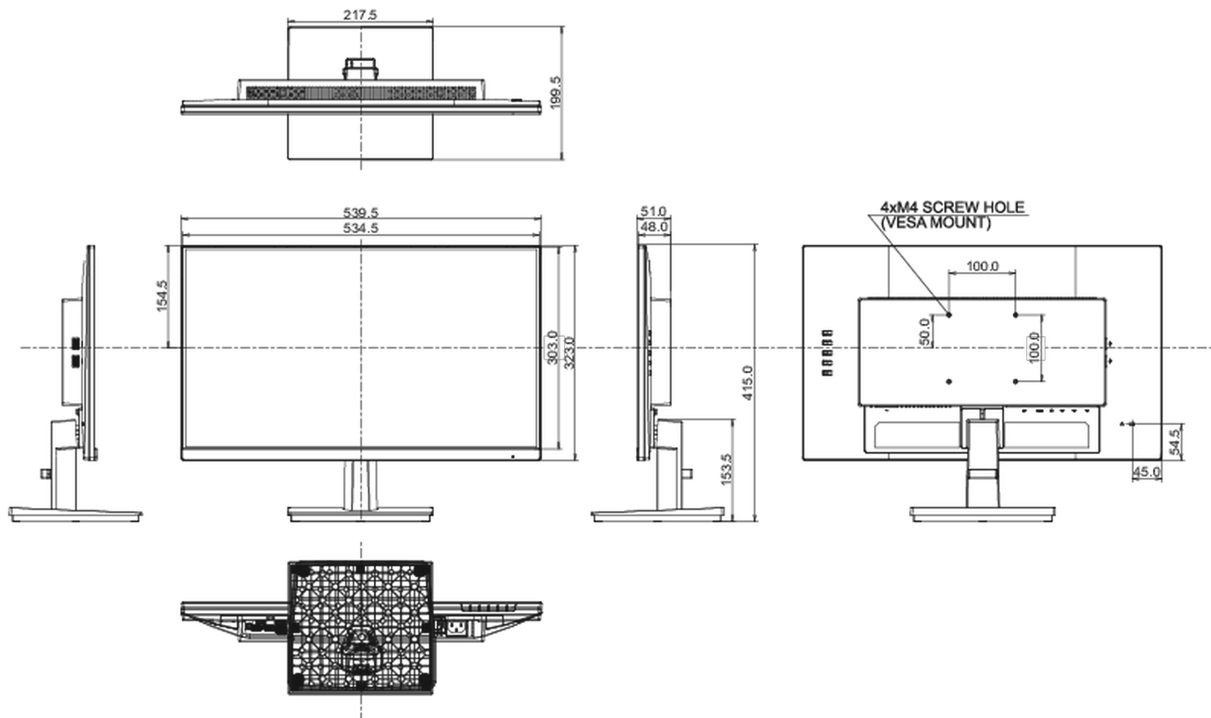

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.