

## 98" 4K UHD professional digital signage display with advanced control and connectivity options



Elevate your visual communication with the LE9864UHS-B1AG and unlock the new possibilities for your business. This 500cd/m<sup>2</sup> high brightness display is a powerful business tool that takes your marketing and communication efforts to the next level. With its Android 14 OS, [iiSignage<sup>2</sup>](#) (CMS), iiControl (DMS), iiShare (Wireless Presentation) and Signal FailOver features, this display offers a straightforward user experience, making content creation, management, and sharing a breeze. WiFi enabled, the display is ready for remote content delivery using your network or you can choose to utilise LAN control.

Its versatile orientation, sleek design including wall mounting bracket, and 24/7 reliability ensure it seamlessly integrates into any business environment. Whether it's used in retail, corporate, hospitality, or restaurant settings, the LH64 SERIES will undoubtedly captivate your audience and leave a lasting impression.




## Android OS

Díky operačnímu systému Android můžete snadno přizpůsobit displej svým potřebám instalací aplikací přímo na něj.

## 4 SIMPLE STEPS

TO REACH YOUR AUDIENCE

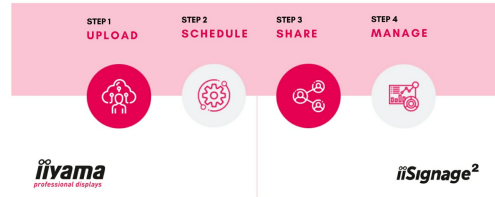

## iiSignage²

- iiSignage² je naše platforma pro správu obsahu digitálních nápisů, která umožňuje snadno zobrazovat a ovládat obsah a bezpečně spravovat displeje. Systém pro správu obsahu (CMS) vám poskytuje úplnou kontrolu nad zobrazováním zpráv a reklam dálkově a bezpečně.



## Signal FailOver

FailOver is a feature which automatically detects input sources. When there is no signal on the default input it will automatically switch to the next available input. FailOver allows customers to prioritize a number of inputs (incl. Browser, Media Player and Custom) and ensures your content is always actively displayed, assuring active content at all times.

## SPECIFICATION

### 01 CHARAKTERISTIKA OBRAZU

<b>Design</b>	Thin bezel
<b>Úhlopříčka monitoru</b>	98", 247.7cm
<b>Panel</b>	VA, Anti-Glare coated glass, s matnou povrchovou úpravou, haze 25%
<b>Nativní rozlišení</b>	3840 x 2160 @60Hz (8.3 MegaPixels 4K UHD)
<b>Formát obrazu</b>	16:9
<b>Jas</b>	500 cd/m <sup>2</sup>
<b>Kontrast</b>	5000:1
<b>Čas reakce (GTG)</b>	6.5ms
<b>Úhel sledování</b>	horizontální/vertikální: 178°/178°, na parvo/na lefo: 89°/89°, nahoru/dolů: 89°/89°
<b>Barevná podpora</b>	1.07G (8 Bits+FRC)
<b>Horizontalfrequenz</b>	57 - 62kHz
<b>Arbeitsfläche H x B</b>	2158.8 x 1214.4mm, 85 x 47.8"
<b>Šířka rámečků (strany, nahoře, dole)</b>	21.5mm, 21.8mm, 21.8mm
<b>Velikost bodů</b>	0.487mm
<b>Barva rámečku</b>	černá, matná

### 02 ROZHRANÍ / KONEKTORY / OVLÁDÁNÍ

<b>Digitální vstupní porty</b>	HDMI x2 (v.2.0, max. 3840x2160 @60Hz) USB-C x1 (DP Alt, 15W PD)
<b>Řídící vstup monitoru</b>	RS-232c x1 (2.5mm sub-mini jack) RJ45 (LAN) x1 IR x1 (3.5mm stereo mini)
<b>Audio Out</b>	Mini jack x1 (3.5mm) Reproduktory 2 x 10W
<b>Řídící výstup monitoru</b>	RS-232c x1 (2.5mm) IR smyčka x1 (3.5mm)
<b>HDCP</b>	v.1.4 & 2.0
<b>USB ports</b>	x2 (v.2.0)

### 03 VLASTNOSTI

<b>Integrovaný software</b>	Android 14 OS, iiSignage <sup>2</sup> , iiControl, iiShare, FailOver, TeamViewer, PDF & Media Player, iiBrowser, File manager
<b>WiFi</b>	ano (Built-in, 2.4G/ 5G)
<b>Hardware</b>	CPU: A73*4, GPU: G52 MC1, RAM: 4GB, ROM: 32GB
<b>Extra</b>	Wall mounting kit included (VESA 700x500mm)
<b>Max. provozní doba</b>	24/7
<b>Anti image retention</b>	ano
<b>Přehrávání médií</b>	ano
<b>Rámeček</b>	metal

## 04 OBECNÉ

<b>Jazyky OSD</b>	EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL, SV, FI, DA, NB
<b>Kontrolní tlačítka</b>	Power Indicator, Power button, Remote Sensor
<b>Nastavitelné parametry</b>	network (status, Wifi, ethernet, hotspot), picture (brightness, contrast, sharpness, black level, tint, colour, noise reduction, gamma selection, colour temp., colour control, picture reset), audio (balance, treble, bass, volume, audio out, max. volume, min. volume, mute, audio out sync, speaker setting, audio reset), OSD setting (OSD timeout, OSD H-Position, OSD V-position, OSD transparency, information OSD), general (logo and animation, wallpaper, no signal image, schedule, off timer), screen (zoom mode, custom zoom, system rotation, screen reset), device (power on status, RS232 routing, IR control, power saving, panel saving, monitor info, other), channel (boot on source, rename input channel, auto source switching, signal lost detection, HDMI version), system (language, system update, setting reset, factory reset, Android setting), admin (menu lock, meeting room, HDMI CEC, screen share, Miracast standby, log export)
<b>Plug&amp;Play</b>	DDC2B

## 05 MECHANICKÉ ČÁSTI

<b>Orientace</b>	horizontální
<b>Bezventilátorový design</b>	ano
<b>VESA</b>	700 x 500mm
<b>Rozsah provozní teploty</b>	0°C - 40°C
<b>Rozsah teploty v klidu</b>	- 20°C - 60°C
<b>MTBF</b>	50.000 hours (bez podsvícení)

## 06 ZAHRNUTÉ PŘÍSLUŠENSTVÍ

<b>Kabely</b>	napájecí, HDMI, RS-232c
<b>Příručky</b>	uživatelský manuál, instrukce bezpečnosti
<b>Ostatní</b>	Wall mount bracket, Wall mount guide, Screws, Screw anchors, Stickers for screw holes
<b>Dálkové ovládání</b>	ano (včetně baterie)

## 07 POWER-MANAGEMENT

<b>Napájecí zdroj:</b>	interní
<b>Napájení</b>	AC 100 - 240V, 50/60Hz
<b>Odběr energie:</b>	388W typisch, 0.5W odpočinek, 0.3W vypnutý

## 08 UDRŽITELNOST

<b>Předpisy</b>	CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH (UKCA, RoHS2.0, PFOS)
<b>Energetická třída (Regulation (EU) 2017/1369)</b>	G

## 09 ROZMĚRY / HMOTNOST

**Rozměry výrobku Š x V x D** 2202 x 1257.7 x 110.5mm

**Rozměry balení Š x V x D** 2390 x 1500 x 280mm

**Váha (bez balení)** 61kg

**Váha (s balením)** 77.9kg

**EAN code** 4948570125227



POWER

HDMI

RS-232C

Všechny ochranné známky jsou registrovány a chráněny. Vyhrazené právo na změny. Veškeré ploché panely LCD splňují normu ISO-9241-307:2008 v oblasti počtu vadných pixelů. © IYAMA CORPORATION. ALL RIGHTS RESERVED