



34" IPS ultra-wide flat screen with PiP, PBP and height adjustable stand

With a 21:9 UWQHD resolution, the ProLite XUB3493WQSU provides an extended desktop space ideal for working with multiple applications side by side. The IPS panel ensures accurate colour reproduction and wide viewing angles, suitable for both detailed work and media consumption. Equipped with Picture-in-Picture (PiP) and Picture-by-Picture (PbP) functionalities, the monitor allows you to display content from two different sources simultaneously. This is especially useful for professionals who need to monitor multiple systems or compare data across devices without the need for a second screen.

The 150 mm height-adjustable stand helps you maintain an ergonomic posture, while flicker-free technology and a blue light reducer contribute to reduced eye fatigue. The XUB3493WQSU offers a practical and flexible solution for users who value efficiency, clarity, and comfort.



IPS Technology

IPS technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.



ULTRA WIDE - UWQHD

UWQHD (Ultra Wide QHD) resolution offers an ultra wide (21:9) viewable area.

01 DISPLAY CHARACTERISTICS

| | |
|----------------------|---|
| Diagonal | 34", 86.7cm |
| Panel | IPS panel technology LED |
| Native resolution | 3440 x 1440 @120Hz (4.9 megapixel UWQHD) |
| Aspect ratio | 21:9 |
| Panel brightness | 400 cd/m ² |
| Static contrast | 1000:1 |
| Advanced contrast | 80M:1 |
| Response time (MPRT) | 1ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 16.7mIn 8bit (sRGB: 100%, NTSC: 74%) |
| Horizontal Sync | 30 - 185kHz |
| Viewable area W x H | 799.8 x 334.8mm, 31.5 x 13.2" |
| Pixel pitch | 0.233mm |
| Colour | matte, black |

02 INTERFACES / CONNECTORS / CONTROLS

| | |
|--------------|--|
| Signal input | HDMI x2 (v.2.0) DisplayPort x1 (v.1.2) |
| USB HUB | x4 ((2x Type A v.3.2 Gen 1 (5Gbps, 4.5W) 2x Type C (5Gbps, 7.5W))) |
| HDCP | yes |

03 FEATURES

| | |
|-----------------------|--|
| Blue light reducer | yes |
| Flicker free | yes |
| Adaptive Sync support | HDMI & Display Port: 3440 x 1440 @48-120Hz |
| HDR | yes |
| OSD languages | EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL |
| Control buttons | Power, Menu, Adjust/Volume/Mute, Adjust/Shortcut, Input/Exit |
| User controls | picture (video mode adjust, brightness, contrast, black tuner, sharpness, OD, ACR, Eco, X-res Technology), colour adjust (colour temperature, user colour, i-Style colour, blue light reducer, gamma), PiP/PbP (PiP/PbP mode, sub win input, PiP size, PiP position, swap, audio input), input select (input source), audio (volume, mute), language, OSD (OSD H. position, OSD V. position, OSD background, OSD time out), setup menu (reset, USB charge, DDC/CI Control, HDMI range, HDR, Adaptive Sync, motion blur red., opening logo, power LED, information |
| Speakers | 2 x 5W |
| Convenience | Kensington-lock™ prepared, DDC/CI, Mac OSX |

04 MECHANICAL

| | |
|------------------------------|--------------------------|
| Display position adjustments | height, swivel, tilt |
| Height adjustment | 150mm |
| Swivel stand | 90°; 45° left; 45° right |
| Tilt angle | 23° up; 5° down |
| VESA mounting | 100 x 100mm |
| Cable management system | yes |

05 ACCESSORIES INCLUDED

| | |
|--------|---------------------------------|
| Cables | power, USB, HDMI, DP |
| Other | quick start guide, safety guide |

06 POWER MANAGEMENT


| | |
|-------------------|---|
| Power supply unit | internal |
| Power supply | AC 100 - 240V, 50/60Hz |
| Power usage | 44W typical, 0.5W stand by, 0.3W off mode |

07 SUSTAINABILITY

| | |
|---|---|
| Regulations | CE, TÜV-GS, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA |
| Energy efficiency class (Regulation (EU) 2017/1369) | F |
| REACH SVHC | above 0.1%: Lead |

08 DIMENSIONS / WEIGHT

| | |
|------------------------------|-------------------------------|
| Product dimensions W x H x D | 817 x 428.5 (572.5) x 245.5mm |
| Box dimensions W x H x D | 900 x 188 x 456mm |
| Weight (without box) | 9.6kg |
| Weight (with box) | 11.9kg |
| EAN code | 4948570125609 |

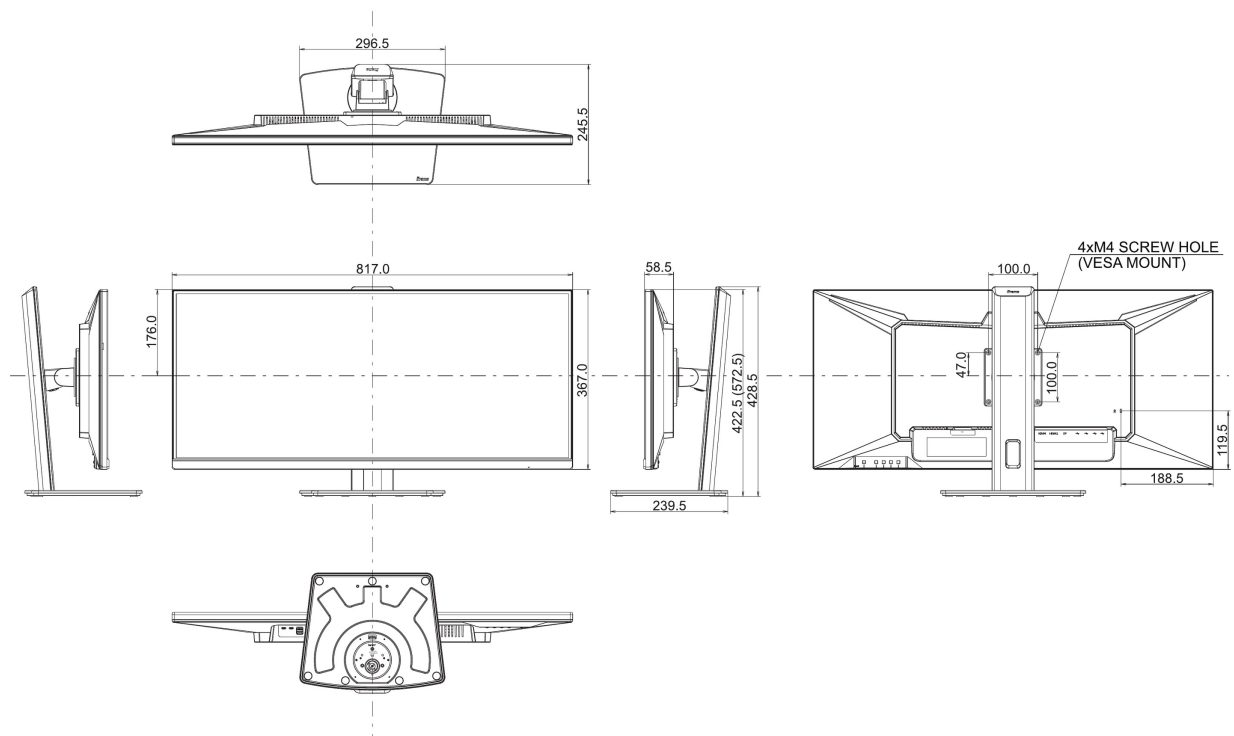

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED