
INFORMATION

21.5" IPS monitor with a three-side borderless design, integrated USB hub, 100Hz refresh rate and height-adjustable stand



The ProLite XUB2293HSU is an excellent choice for professionals seeking a compact and high-performance monitor for multi-monitor setups and office work. Its sleek edge-to-edge design ensures seamless visuals, making it perfect for dual or triple screen configurations.

With IPS panel technology, the XUB2293HSU delivers precise colour reproduction, wide viewing angles and excellent contrast and brightness. This makes it ideal for photo editing, design, and web content. A blue light reducer helps minimise eye strain, while the 150mm height-adjustable stand with tilt, swivel, and pivot offers optimal ergonomic comfort.

Connectivity includes HDMI, DisplayPort, a 2-port USB hub, built-in speakers, and a headphone socket. Compact and feature-rich, it is designed to enhance comfort and productivity.



Multi-screen setup for a panoramic workspace

Connect multiple ultra-slim bezel monitors to create a panoramic workspace, keep your apps in view, streamline multitasking, and boost productivity.



Versatile connectivity for all your devices

Connect multiple devices and accessories in one simple step with HDMI Display Port and the USB hub, streamlining your workspace for maximum efficiency and ensuring a tidy, uninterrupted workflow.



Adjustable stand for optimal comfort

Find your perfect screen position easily and maintain a healthy, comfortable posture all day long. Thanks to its fully adjustable stand, you can effortlessly adapt the monitor to your needs. Raise or lower the height, swivel left or right, or tilt the screen to reduce glare and find the optimal viewing angle. Whether you're working, designing, or attending long video calls, this flexibility helps reduce neck and back strain, improving both comfort and productivity throughout your day.



Reduced eye strain & fatigue

Work, study or play longer without eye fatigue, thanks to flicker-free technology and reduced blue light emissions. These features help minimize eye strain and improve visual comfort, allowing you to stay focused and productive throughout the day.

01 ХАРАКТЕРИСТИКИ ДИСПЛЕЯ

Дизайн	безрамочный (с 3-х сторон)
Диагональ	21.5", 54.5см
Панель	IPS панель с технологией LED, матовая поверхность
Разрешение	1920 x 1080 @100Гц (2.1 megapixel Full HD)
Соотношение сторон	16:9
Яркость	300 cd/m ²
Контрастность	1000:1
Расширенная контрастность	80M:1
Время отклика (MPRT)	1ms
Видимая область	горизонталь/вертикаль: 178°/178°, право/лево: 89°/89°, вверх/вниз: 89°/89°
Поддержка цвета	16.7mln (sRGB: 96%; NTSC: 72%)
Частота горизонтальной развертки	30 - 110кГц
Видимая область Ш x В	478.7 x 260.3мм, 18.8 x 10.3"
Размер пикселя	0.249мм
Colour	матовый, белый

02 ИНТЕРФЕЙСЫ / РАЗЪЕМЫ / УПРАВЛЕНИЕ

Вход сигнала	HDMI x1 DisplayPort x1
USB HUB	x2 (2.0 (DC5V, 500mA))
HDCP	да
Разъем для наушников	да

03 ФУНКЦИИ

Уменьшение голубого свечения	да
Flicker Free LED	да
Adaptive Sync поддержка	for DP only
Extra	i-style Colour
Языки экранного меню	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL
Кнопки управления	Power, Menu, Adjustment/ Volume, Adjustment/ i-Style Colour, Input/ Exit

Настройки пользователя	picture adjust (brightness, contrast, Eco, ACR, OD, MBR, Adaptive Sync), colour settings (i-Style colour, blue light reducer, colour temp., user preset), OSD (OSD H. position, OSD V. position, OSD rotate, OSD time), language, recall, miscellaneous (soft and sharp, video mode adjust, opening logo, RGB range, LED, display information), input select, audio settings (volume, mute)
Колонки	2 x 2Вт
Дополнительно	подготовка Kensington-lock™, DDC/CI, DDC2B, Mac OSX

04 МЕХАНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Эргономика	высота, вращение подставки, наклон, pivot (вращение в обе стороны)
Настройка высоты (HAS)	150мм
Вращение экрана (PIVOT)	90°
Вращение подставки (Swivel)	120°; 60° лево; 60° право
Угол наклона экрана	23° вверх; 5° вниз
Крепление VESA	100 x 100mm
Креплени для кабелей	да

05 6.АКСЕССУАРЫ

Кабели	Питание (1.5m), USB (1.5m), HDMI (1.5m)
Прочее	Краткое руководство по началу работы, Руководство по безопасности

06 POWER-MANAGEMENT

Блок питания	внутренний
Питание	AC 100 - 240V, 50/60Гц
Потребляемая мощность	17W стандарт, 0.5W ожидание, 0.3W отключено


07 СТАНДАРТЫ

Сертификаты	TCO Certified, CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA
Класс энергоэффективности (Regulation (EU) 2017/1369)	E
EPEAT	*registration varies by country, go to www.epeat.net for details
REACH SVHC	свинца, превышает 0.1%

08 РАЗМЕР / ВЕС

Размер продукта Ш x В x Г	492 x 328.5 (478.5) x 209.5мм
----------------------------------	-------------------------------

Размер коробки Ш x В x Г	620 x 395 x 126мм
Вес (без упаковки)	3.9кг
Вес (с упаковкой)	5.3кг
EAN код 4948570126910	

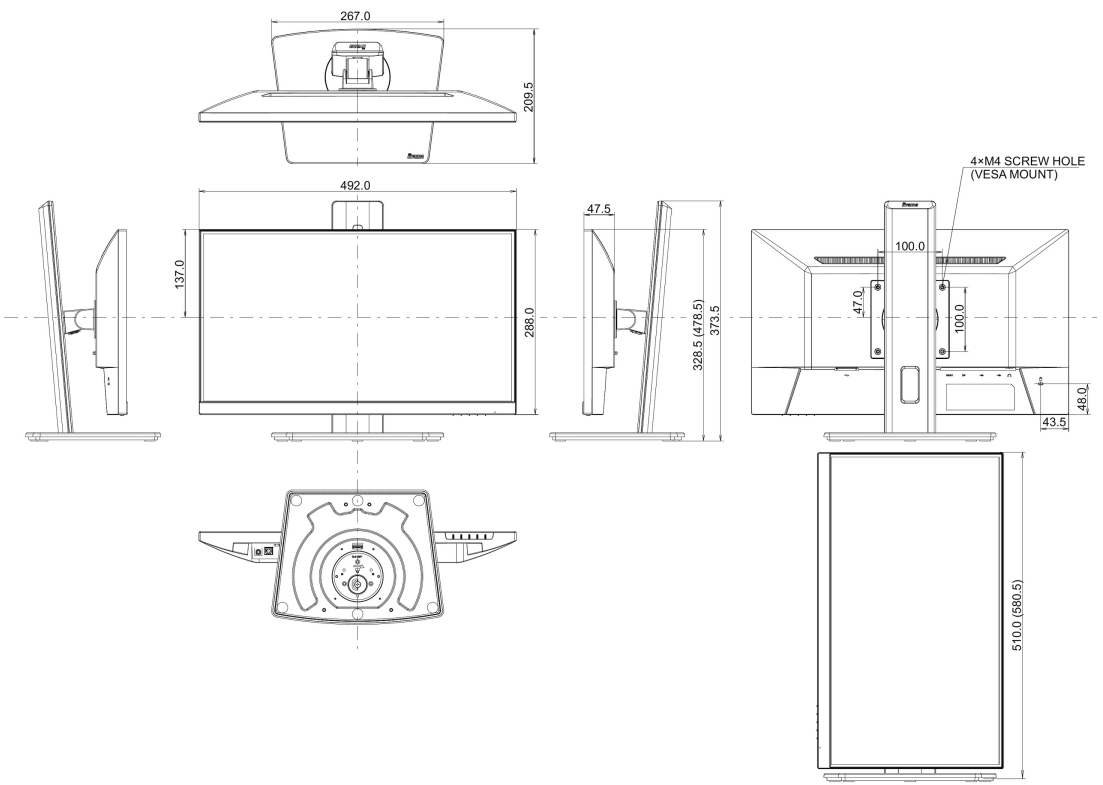





Все товарные знаки и торговые марки являются собственностью их владельцев и они защищены. Ошибки и изменения допускаются. Спецификации могут быть изменены без уведомления. Все LCD мониторы соответствуют стандарту ISO-9241-307:2008 по политике битых пикселей. © IIYAMA CORPORATION. ALL RIGHTS RESERVED