



INFORMATION

27" IPS QHD panel with 4-side slim bezel, with B energy class and height adjustable stand



The ProLite XB2792QSU is a 27" QHD monitor ideal for professionals who need more screen space, precise image quality, and a sustainable choice. Packaged without plastic and made from 85% post-consumer recycled materials, it meets TCO Certification and EPEAT® Silver standards.

With a resolution of 2560 x 1440, it offers 77% more screen space than Full HD, helping you work across multiple windows and view more detail without constant scrolling.

Its IPS panel delivers sharp detail, vibrant colours and wide viewing angles, while the frameless design creates a sleek, distraction-free workspace. To take care of your eye health, it complies with the Eye Safe and Eye Comfort Certifications and the 150mm height-adjustable ergonomic stand ensures all-day comfort.



Thank you

Thank you for making a responsible product choice, that helps drive progress towards a more sustainable future. To achieve this, we use zero plastic to pack this product and the product housing itself is made of 85% post-consumer recycled plastics. 100% of the packing is fully recyclable.




Better Choice - Certified

This product meets 100% of the TCO Certified criteria, the world's most comprehensive sustainability certification for IT products. It also meets the EPEAT® Silver criteria covering both Environmental and Social Responsibility Assessment set out by EPEAT® - world's premier ecolabel for electronics. Same as each electronic equipment sold in the EU, it complies with the The Restriction of Hazardous Substances Directive 2002/95/EC (RoHS 1) on the restriction of the use of certain hazardous substances. However, although the directive allows for use of up to 0.1% of mercury, this product is 100% mercury free.



Save electricity, maintain picture performance

Compared to an E Energy class monitor of the same size, your B label iiyama display gives you a **cost saving** of around **40%**! Without compromising on performance. The power-efficient feature using the most efficient LED backlight technology in combination with high efficiency colour filter maintains brightness and vivid colours so the picture performance stays unaffected.

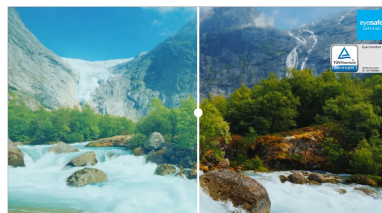

Take care of your eyes

Based on optical testing and research led by optometrists and ophthalmologists from across the globe, the Eye Safe Certification, means this product provides always-on blue light protection reducing high-energy blue light yet maintaining colour performance intact. It also meets the requirements of the Eye Comfort Certification confirming the product has reduced blue light and is flicker free to protect eyes and preserve user vision and allow the user to change body position without compromising visual image quality.

01 ХАРАКТЕРИСТИКИ ДИСПЛЕЯ

Дизайн	4-side slim bezel
Диагональ	27", 68.6см
Панель	IPS панель с технологией LED, матовая поверхность
Разрешение	2560 x 1440 @120Гц (3.7 megapixel QHD)
Соотношение сторон	16:9
Яркость	350 cd/m ²
Контрастность	1500:1
Расширенная контрастность	80M:1
Время отклика (GTG)	3мс
Видимая область	горизонталь/вертикаль: 178°/178°, право/лево: 89°/89°, вверх/вниз: 89°/89°
Поддержка цвета	16.7mln (sRGB: 96%; NTSC: 72%)
Частота горизонтальной развертки	30 - 140кГц
Видимая область Ш x В	596.7 x 335.7мм, 23.5 x 13.2"
Размер пикселя	0.233мм
Colour	матовый, чернить

02 ИНТЕРФЕЙСЫ / РАЗЪЕМЫ / УПРАВЛЕНИЕ

Вход сигнала	HDMI x1 (v.2.0) DisplayPort x1 (1.2)
USB HUB	x2 (v. 3.2 Gen 1 (5Gbps, 4.5W))
HDCP	да
Разъем для наушников	да

03 ФУНКЦИИ

Уменьшение голубого свечения	да
Flicker Free LED	да
Adaptive Sync поддержка	да
Extra	i-Style colour
Языки экранного меню	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL, UA
Кнопки управления	Joystick: Center: Power/Menu, Up/Input Select, Down, Left/i-Style colour/Eco/Blue Light Reducer, Right/Volume/Mute Audio

Настройки пользователя	picture adjust (brightness, contrast, ECO, ACR, OD, Adaptive Sync, X-Res Technology, DPS), colour settings (6-axis, i-Style colour, blue light reducer, gamma, RGB range, colour temp.), OSD settings (OSD H. position, OSD V. position, OSD time, OSD rotate, OSD background, DDC/CI, display information), miscellaneous (sharpness, video mode adjust, opening logo, power LED, USB charge, audio settings (volume, mute), recall (recall all)
Колонки	2 x 2Вт
Дополнительно	подготовка Kensington-lock™, DDC/CI, DDC2B, Mac OSX

04 МЕХАНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Эргономика	высота, вращение подставки, наклон, pivot (вращение в обе стороны)
Настройка высоты (HAS)	150мм
Вращение экрана (PIVOT)	90°
Вращение подставки (Swivel)	90°; 45° лево; 45° право
Угол наклона экрана	23° вверх; 5° вниз
Крепление VESA	100 x 100mm
Креплени для кабелей	да

05 6.АКСЕССУАРЫ

Кабели	Питание (1.8m), USB (1.8m), HDMI (1.8m)
Прочее	Краткое руководство по началу работы, Руководство по безопасности

06 POWER-MANAGEMENT

Блок питания	внутренний
Питание	AC 100 - 240V, 50/60Гц
Потребляемая мощность	12W стандарт, 0.5W ожидание, 0.3W отключено


07 СТАНДАРТЫ


Сертификаты	TCO Certified, CE, TÜV-GS, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA
Класс энергоэффективности (Regulation (EU) 2017/1369)	B
EPEAT Silver	*registration varies by country, go to www.epeat.net for details
REACH SVHC	свинца, превышает 0.1%

08 РАЗМЕР / BEC

Размер продукта Ш x В x Г	615.5 x 403.5 (546) x 209.5мм
----------------------------------	-------------------------------

Размер коробки Ш x В x Г	707 x 483 x 124мм
Вес (без упаковки)	5.5кг
Вес (с упаковкой)	8.2кг
ЕАН код	4948570126200

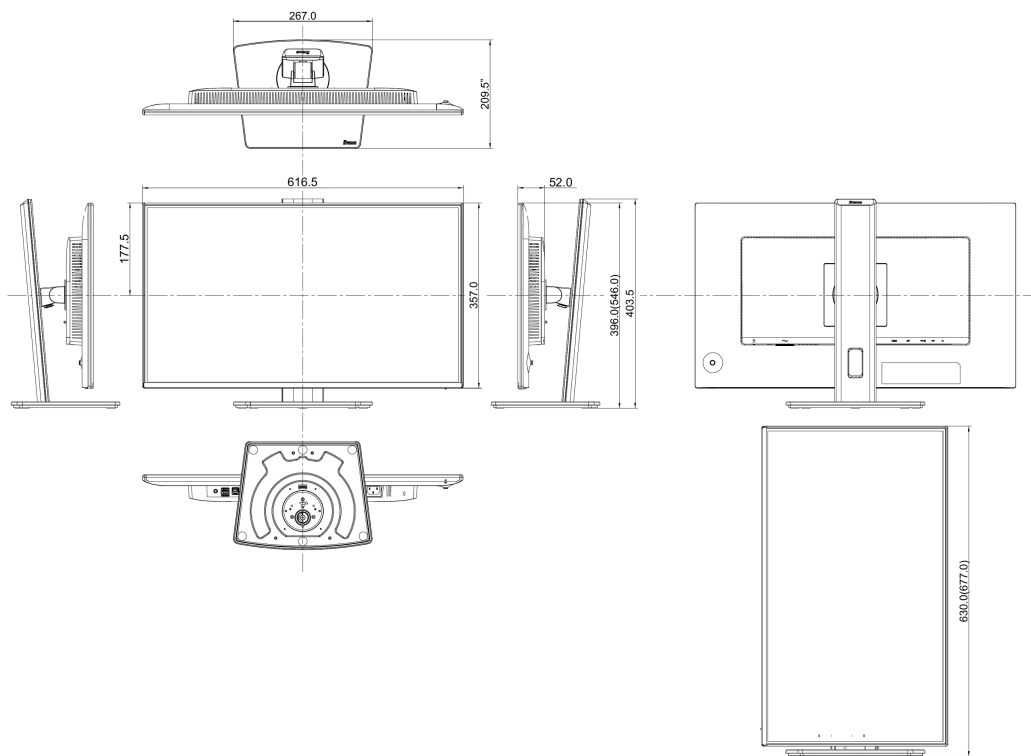





Все товарные знаки и торговые марки являются собственностью их владельцев и они защищены. Ошибки и изменения допускаются. Спецификации могут быть изменены без уведомления. Все LCD мониторы соответствуют стандарту ISO-9241-307:2008 по политике битых пикселей. © IIYAMA CORPORATION. ALL RIGHTS RESERVED