




## Get ahead with the 27" GB2741QSU Black Hawk monitor with IPS Panel Technology, 1ms MPRT and height adjustable stand


Experience outstanding gaming performance with the 27" GB2741QSU featuring sharp QHD resolution. Powered by IPS panel technology, a 144Hz refresh rate, and a lightning-fast 1ms MPRT response time, it delivers smooth, vibrant, and responsive gameplay. NVIDIA G-SYNC Technology eliminates screen tearing for fluid action, while the Black Tuner function enhances visibility in dark scenes. The 150mm height-adjustable stand lets you fine-tune your setup for maximum comfort and control.

Available also with fixed stand : [G-Master G2741HSU-B1 \(1920x1080\)](#) and [G-Master G2741QSU-B1 \(2560x1440\)](#)

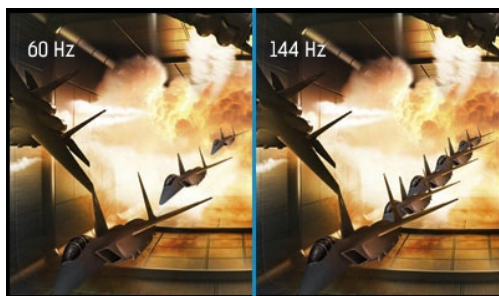

144Hz

Rapid refresh rate and frame rate guarantee smooth, blur free and judder free graphics, with lower latency and lag improving response times for fast paced games. Especially suited to the fast pace games like FPS, racers, MOBA and sports where the 144Hz refresh rate delivers the crisp and sharp images needed to raise your game.

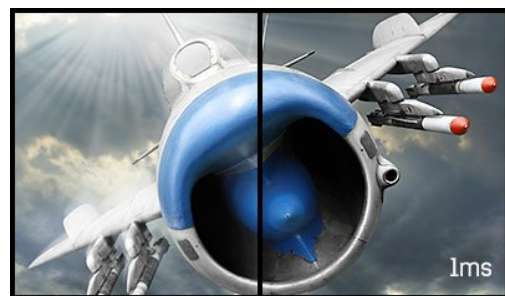

1ms

Fast response time is key to ultra-smooth gaming. It reduces ghosting and blurring providing the user with an improved graphic performance.

## 01 DISPLAY CHARACTERISTICS

|                      |                                                                       |
|----------------------|-----------------------------------------------------------------------|
| Diagonal             | 27", 68.6cm                                                           |
| Panel                | IPS, matte finish                                                     |
| Native resolution    | 2560 x 1440 @144Hz                                                    |
| Aspect ratio         | 16:9                                                                  |
| Panel brightness     | 350 cd/m <sup>2</sup>                                                 |
| Static contrast      | 1500:1                                                                |
| Advanced contrast    | 80M:1                                                                 |
| Response time (MPRT) | 1ms                                                                   |
| Viewing zone         | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support       | 16.7mln                                                               |
| Horizontal Sync      | 30 - 212kHz                                                           |
| Viewable area W x H  | 596.7 x 335.6mm, 23.5 x 13.2"                                         |
| Pixel pitch          | 0.233mm                                                               |
| Colour               | matte, black                                                          |

## 02 INTERFACES / CONNECTORS / CONTROLS

|                     |                                                                                           |
|---------------------|-------------------------------------------------------------------------------------------|
| Signal input        | HDMI x1 (v.2.0, max 2560 x 1440 @144Hz)<br>DisplayPort x1 (v.1.4, max 2560 x 1440 @144Hz) |
| USB HUB             | x2 (v.2.0 DC5V, 500mA)                                                                    |
| HDCP                | yes                                                                                       |
| Headphone connector | yes                                                                                       |

## 03 FEATURES

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Blue light reducer    | yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Flicker free          | yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Adaptive Sync support | G-SYNC - 2560 x 1440 @48-144Hz, Display Port Only                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| OSD languages         | EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL, UA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Control buttons       | Joystick / Power Button: Power / Menu (Center), Up / Input Select, Down, Right / Volume / Mute Audio, Left / Brightness / Adaptive Sync / Night Mode / Motion Blur Reduction / i-Style Colour / ECO                                                                                                                                                                                                                                                                                                                                                                                                  |
| User controls         | picture adjust (contrast, brightness, OD, Adaptive Sync, Adv. Contrast, Night Mode, Motion Blur Reduction, Gamma), input select (Auto/Manual, HDMI, DP), audio settings (volume, mute audio), store user settings (user modes), colour settings (6-Axis, colour temperature, user preset, i-style colour, blue light reducer, black tuner), image adjust (sharpness, RGB range, video mode adjust, x-res technology), language, setup menu (OSD h. position, OSD v. position, OSD time, OSD background, OSD rotate, opening logo, power LED, ddc/ci control), display information, reset (reset all) |
| Speakers              | 2 x 2W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Convenience           | Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OSX                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## 04 MECHANICAL

|                              |                                        |
|------------------------------|----------------------------------------|
| Display position adjustments | height, pivot (rotation), swivel, tilt |
| Height adjustment            | 150mm                                  |
| Rotation (PIVOT function)    | 90°                                    |
| Swivel stand                 | 90°; 45° left; 45° right               |
| Tilt angle                   | 23° up; 5° down                        |

|                         |             |
|-------------------------|-------------|
| VESA mounting           | 100 x 100mm |
| Cable management system | yes         |

## 05 ACCESSORIES INCLUDED

|        |                                       |
|--------|---------------------------------------|
| Cables | power (1.5m), USB (1.5m), HDMI (1.5m) |
| Other  | quick start guide, safety guide       |

## 06 POWER MANAGEMENT


|                   |                                           |
|-------------------|-------------------------------------------|
| Power supply unit | internal                                  |
| Power supply      | AC 100 - 240V, 50/60Hz                    |
| Power usage       | 17W typical, 0.5W stand by, 0.3W off mode |

## 07 SUSTAINABILITY

|                                                     |                                                                        |
|-----------------------------------------------------|------------------------------------------------------------------------|
| Regulations                                         | CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA |
| Energy efficiency class (Regulation (EU) 2017/1369) | D                                                                      |
| REACH SVHC                                          | above 0.1%: Lead                                                       |

## 08 DIMENSIONS / WEIGHT

|                              |                           |
|------------------------------|---------------------------|
| Product dimensions W x H x D | 613 x 403 (553) x 390.5mm |
| Box dimensions W x H x D     | 691 x 442 x 142mm         |
| Weight (without box)         | 5.4kg                     |
| Weight (with box)            | 7.0kg                     |
| EAN code                     | 4948570127450             |

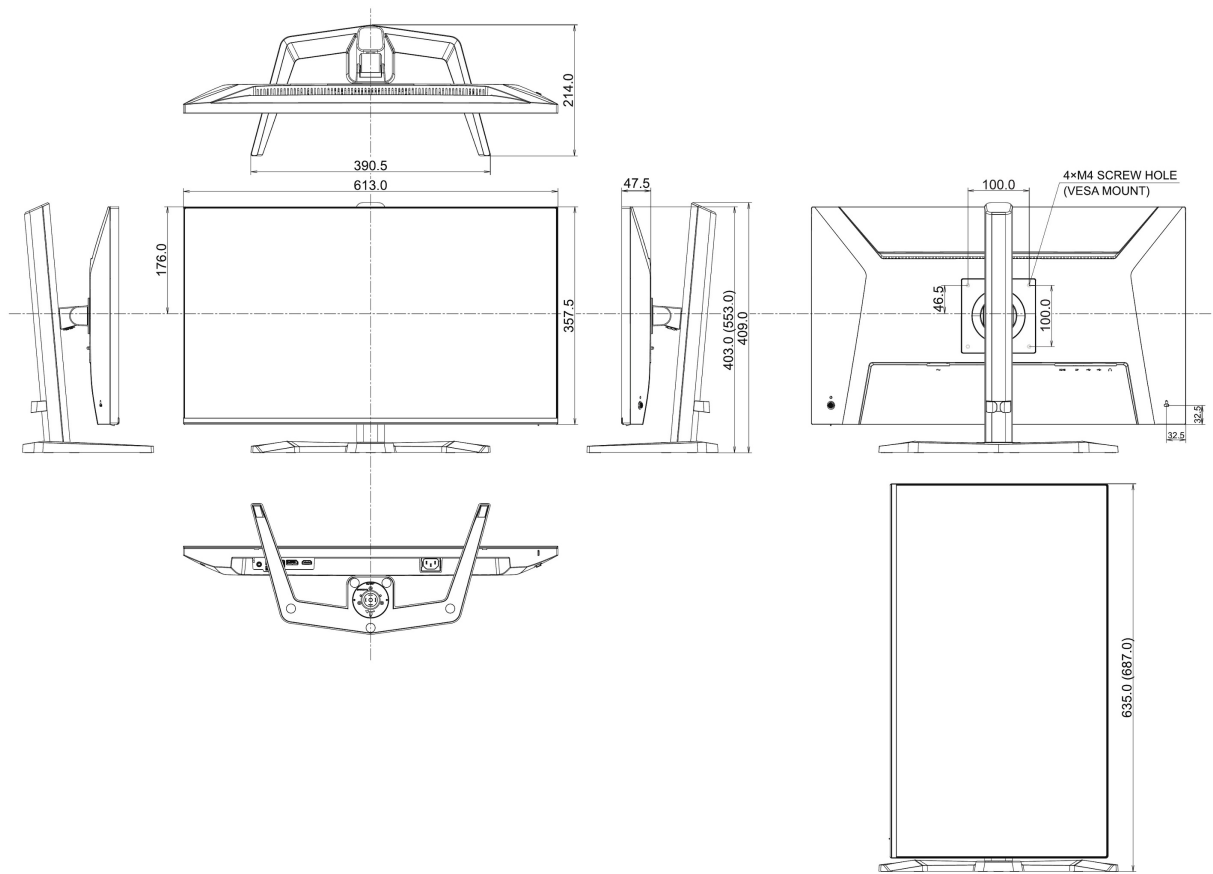

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED