



32" 4K VA panel with USB-C Dock (95W), KVM Switch, LAN and PiP/PbP


The ProLite XB3294UHSCP-B1 is a 32 inch 4K monitor designed to give you more space, sharper detail, and smoother workflows.

Its VA panel with Ultra HD resolution and a 3000:1 contrast ratio delivers crisp, vibrant visuals. A brightness of 350cd/m², 2ms response time, and Adaptive Sync ensure everything stays smooth and clear, whether you're creating content or working with data.

USB-C (95W Power Delivery), HDMI, DisplayPort, and a built-in KVM switch make it easy to manage multiple devices while powering your laptop. PiP (Picture-in-Picture) and PbP (Picture-by-Picture) modes let you view content from two sources at the same time for more efficient multitasking.


The three side borderless design helps you stay focused and supports seamless multi-monitor setups. The height adjustable stand, built-in speakers, and headphone jack provide comfort and convenience throughout your day.

Certified with TCO, TÜV-GS and EPEAT Silver, it's a smart, sustainable choice for any modern workspace.

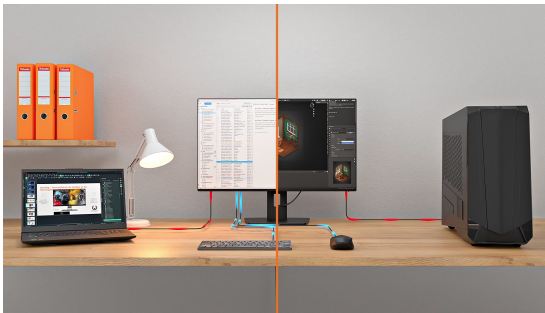

Snadné ovládání více zařízení pomocí KVM

Easily switch between multiple computers using one monitor, keyboard, and mouse, making multitasking smooth and efficient.

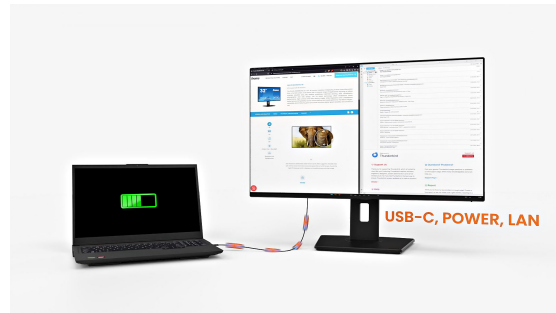

USB-C dock for tidy desk & easy connectivity

Connect everything with just one cable — handle video, data, and power while keeping your desk clean and organized.



Mini HDMI, your gateway to versatile media

Pair your monitor to laptop, camera, console, or mini PC. Enjoy high-quality video and audio, expand your creative workflow and take your entertainment anywhere.



Multi-screen setup for a panoramic workspace

Connect multiple ultra-slim bezel monitors to create a panoramic workspace, keep your apps in view, streamline multitasking, and boost productivity.

SPECIFICATION

01 CHARAKTERISTIKA OBRAZU

Design	3-side borderless
Úhlopříčka monitoru	31.5", 80cm
Panel	VA
Nativní rozlišení	3840 x 2160 @60Hz (8.3 megapixel 4K UHD)
Formát obrazu	16:9
Jas	400 cd/m ²
Kontrast	3000:1
Pokročilý kontrast	80M:1
Čas reakce (GTG)	2ms
Úhel sledování	horizontální/vertikální: 178°/178°, na parvo/na lefo: 89°/89°, nahoru/dolů: 89°/89°
Barevná podpora	1.07B (8bit+FRC) (sRGB: 99%; NTSC: 93%)
Horizontalfrequenz	30 - 160kHz
Arbeitsfläche H x B	708.9 x 405.7mm, 27.9 x 15.9"
Velikost bodů	0.182mm
Barva	matná, černá

02 ROZHRANÍ / KONEKTORY / OVLÁDÁNÍ

Vstupní porty	HDMI x2 (v.2.1) DisplayPort x1 (v.1.2) USB-C x1 (PD 95W)
USB HUB	x4 (2x Type-A v.3.2 Gen 1 (5Gbps, 4.5W) 2x Type-C (5Gbps, 7.5W))
USB-C DOCK	x1 (Power delivery 95W, LAN, USB v.1.2 (Gen 1, 5Gbit))
HDCP	ano
Konektor pro sluchátka	ano
RJ45 (LAN)	x1

03 VLASTNOSTI

KVM switch	ano
Redukce modrého světla	ano
Flicker Free LED	ano
Adaptive Sync support	ano
Extra	i-Style colour
HDR	HDR10
Jazyky OSD	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL, UA
Kontrolní tlačítka	Joystick: Center: Power/Menu, Up/Input Select, Down, Left: i-Style Colour/ECO/Blue Light Reducer, Right/Volume

Nastavitelné parametry	picture adjust (brightness, contrast, Eco, ACR, OD, HDR, AdaptiveSync, X-Res technology, black tuner), colour settings (6-axis, i-Style colour, blue light reducer, gamma, RGB range, colour temp.), PiP/PiB (PiP/PiB, sub source, PiP position, PiP size, swap), OSD (position H, position V, OSD time, background, DDC/CI control, display information), language, miscellaneous (sharpness, video mode adjust, opening logo, power LED, USB charge, USB-C speed), KVM, input select, audio settings (volume, mute, audio input), recall (recall all)
Reproduktory	2 x 5W
Výhoda	Kensington-lock™ připraven, DDC/CI, DDC2B

04 MECHANICKÉ ČÁSTI

Úpravy polohy	výška, swivel, náklon, Pivot (rotace na obě strany)
Výškově nastavitelné	150mm
Otočný (Pivot)	90°
Úhel otočení	90°; 45° na levo; 45° na pravo
Úhel náklonu	23° nahoru; 5° dolů
VESA	100 x 100mm
Systém správy kabelů	ano

05 ZAHRNUTÉ PŘÍSLUŠENSTVÍ

Kabely	napájecí (1.85m), USB (1.5m), HDMI, DP (1.85m), USB-C (1.0m)
Ostatní	uživatelský manuál, instrukce bezpečnosti

06 POWER-MANAGEMENT


Napájecí zdroj:	interní
Napájení	AC 100 - 240V, 50/60Hz
Odběr energie:	55W typisch, 0.5W odpočinek, 0.3W vypnutý

07 UDRŽITELNOST

Předpisy	TCO Certified, CE, TÜV-GS, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA
Energetická třída (Regulation (EU) 2017/1369)	G
REACH SVHC	nad 0.1% olova

08 ROZMĚRY / HMOTNOST

Rozměry výrobku Š x V x D	713.9 x 448.5 (598.5) x 245.5mm
Rozměry balení Š x V x D	790 x 510 x 143mm
Váha (bez balení)	8.5kg
Váha (s balením)	11.8kg
EAN code	4948570126279



Všechny ochranné známky jsou registrovány a chráněny. Vyhrazené právo na změny. Veškeré ploché panely LCD splňují normu ISO-9241-307:2008 v oblasti počtu vadných pixelů. © IIYAMA CORPORATION. ALL RIGHTS RESERVED