

TOUCHSCREENS**INFORMACIJE**

10,1" PCAP 10pt ekran osetljiv na dodir sa Android OS, Pover over Ethernet tehnologijom, NFC/RFID čitačem i RGB LED trakom oko ekrana



Vivid colors and wide viewing angles

Ensure perfect visibility from any position - The IPS panel delivers vivid, consistent colors and wide viewing angles, ideal for dynamic retail environments and busy commercial spaces.



Responsive interaction and good protection

Featuring intuitive DeepContrast PCAP+ touch technology with Optical Bonding, the screen offers smooth and responsive interaction with reduced glare, while remaining protected from moisture and condensation. Perfect for high-use environments.



Deep contrast and less reflections

Enjoy crystal-clear visuals with deep contrast and less glare - the optical bonded touch panel ensures sharp, easy-to-read content, even under bright retail lighting.



Увек јасно, увек чисто

The scratch-resistant, anti-fingerprint coating keeps the screen looking clear and professional even in busy retail settings, reducing visible smudges and protecting the surface from daily wear - your content always shines and the display stays easy to clean.

01 KARAKTERISTIKE EKRANA

Dizajn	Staklo od ivice do ivice
Dijagonala	21.5", 54.6cm
Panel	IPS
Osnovna rezolucija	1920 x 1080 @100Hz (2.1 megapixel Full HD)
Osnovna rezolucija	100Hz
Format ekrana	16:9
Osvetljenje	250 cd/m ²
Osvetljenje	215 cd/m ² sa dodirrom
Propusnost svetla	90%
Statički kontrast	1000:1 sa dodirrom
Vreme odziva (GTG)	5ms
Zona gledanja	horizontalno/vertikalno: horizontal°/vertical 178°, desno/levo: 0°/0°, gore/dole: 0°/0°
Podržane boje	16.7miliona 8bit
Horizontalna sinhronizacija	30 - 86KHz
Vidljiva površina Š x V	478.6 x 260mm, 18.8 x 10.2"
Razmak piksela	0.249mm
Boja okvra	bela, mat

02 TOUCH

Touch tehnologija	DeepContrast-PCAP+
Tačke dodira	10 (HID, samo uz podržani OS)
Način dodira	olovka, prst, rukavica (lateks)
Interfejs dodira	USB
Podržani operativni sistemi	Svi iiyama monitori su Plug & Play kompatibilni sa Windows Linux operativnim sistemima. Detalje o podržanom OS-u za modele osetljive na dodir potražite u odjeljku za preuzimanje u uputstvima za instalaciju drajvera.
Odbijanje dlana	da

03 KONEKTORI / KONTROLE

Ulaz digitalnog signala	HDMI x1 DisplayPort x1
Audio izlaz	Mini konektor x1 Zvučnici 2 x 1W
HDCP	da
USB HUB	x2 (USB 3.2 Gen 1 (5Gbps, 5V, 900mA))

04 KARAKTERISTIKE

Tvrdoća stakla	7H
----------------	----

Zaključavanje OSD tastera	da
----------------------------------	----

05 OPŠTE

OSD jezici	EN, DE, FR, ES, IT, PT, RU, JP, NL, PL
Kontrolni tasteri	Džojstik: desno/meni/ulaz, levo/ulaz/izlaz, gore/eko, dole, uključivanje
Korisničke kontrole	podešavanje slike (osvetljenost, kontrast, i-Stile, napredni kontrast, ECO, OD, X-Res), podešavanja boja (gama, rgb opseg, temp. boja), podešavanja slike (podešavanje video režima, reduktor plave svetlosti, oštar i meki), OSD (horizontalna pozicija, vertikalna pozicija, vreme, pozadina), ekstra (resetovanje, dcc/ci, izbor signala, jačina zvuka, isključivanje zvuka, logo otvaranja, LED, dodirni prekidač)
Pogodnost	Kensington-lock™ priprema
Redukcija plavog svetla	da
Bez treperenja	da
Plug&Play	DDC2B

06 MEHANIČKI

Orijentacija	pejzaž, face-up
Ugao nagiba	90° gore; 5° dole
VESA montiranje	100 x 100mm
Sistem upravljanja kablovima	da

07 UKLJUČENI DODACI

Kablovi	Strujni kabl (1.8m), USB (1.5m), HDMI (1.5m)
Upustva	kratko uputstvo, bezbednosni vodič
Ostalo	Screwdriver
Poklopac kabla	da

08 UPRAVLJANJE NAPAJANJEM

Napajanje	interna
Potrošnja energije	% 1W tipično, 0.5W stand by, 0.3W iskljucen

09 ODRŽIVOST

Propisi	CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, REACH, UKCA, cTUVus
Klasa energetske efikasnosti (Regulation (EU) 2017/1369)	D
REACH SVHC	iznad 0.1%: Olova

10 DIMENZIJE / TEŽINA

Dimenzije proizvoda 493.5 x 361.5 x 239.5mm
Š x V x D

Dimenzije kutije Š x V x D 560 x 350 x 150mm


Težina (bez kutije) 4.5kg

Težina (sa kutijom) 6kg

EAN kod 4948570127191

11 POVEZANE INFORMACIJE

Serija proizvoda [ProLite T2452MSC-B1](#), [ProLite T2252MSC-B2](#), [ProLite T2252MSC-W2](#), [ProLite T2452MSC-W1](#), [ProLite T2752MSC-B1](#), [ProLite T2752MSC-W1](#), [ProLite T2252MSC-B2AG](#), [ProLite T2452MSC-B1AG](#), [ProLite T2752MSC-W1AG](#)

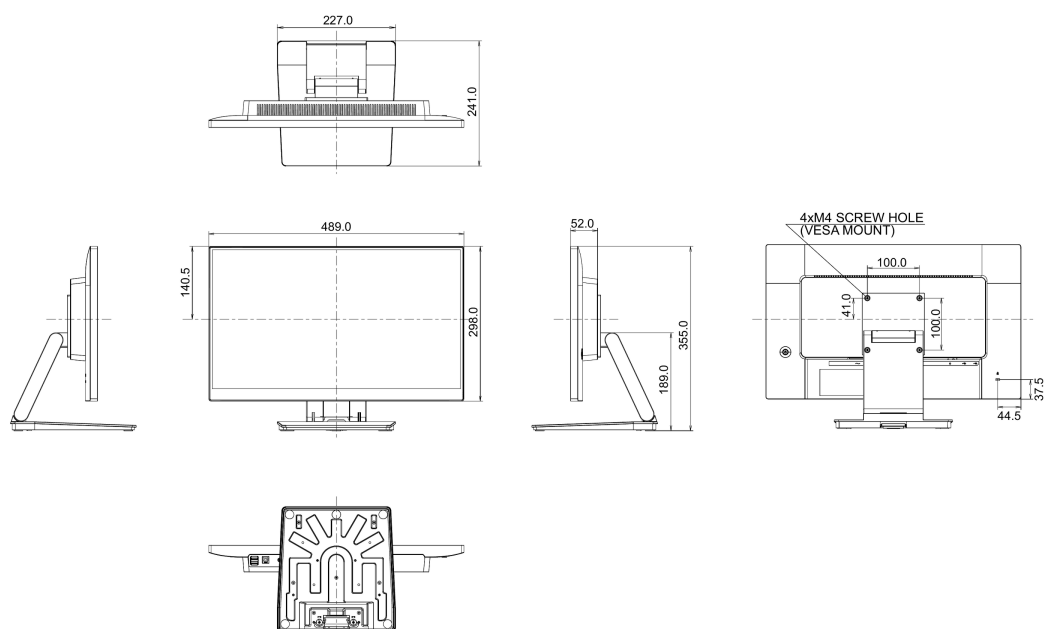



All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © IIYAMA CORPORATION. ALL RIGHTS RESERVED