Savršen izbor za kancelarijsku i kucnu upotrebu

ProLite B2083HSD je 19,5'' monitor sa 1600x900 LED pozadinskim osvetljenjem i podesivim postoljem koje ima mogućnost rotacije ekrana, osiguravajući savršeno držanje i optimalan komfor gledanja. Vreme odziva od 5ms crno-crno i odnos kontrasta 12 000 000:1 omogućavaju vrlo dobar kvalitet slike. Monitor je Energy Star sertifikovan. Predstavlja savršeno rešenje za obrazovne ustanove, lokalne uprave, kancelarijsku upotrebu.

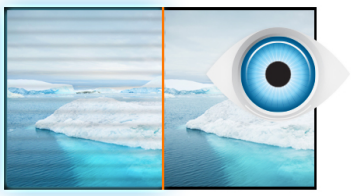

Bez treperenja + Plavo svetlo

Vrhunsko rešenje za udobnost i zdravlje Vaših očiju. Monitori bez treperenja sa funkcijom reduktora plave svetlosti značajno smanjuju naprezanje i umor uzrokovan treperenjem i emitovanjem plave svetlosti običnih monitora.



Postolje podesivo po visini + Pivot

Pomoću postolja podesivog po visini stvorićete ergonomsko radno držanje i položaj koji zadovoljava sve zdravstvene i sigurnosne zahteve. To ne samo da će sprečiti bilo kakve zdravstvene probleme, već će i povećati Vašu produktivnost. Funkcija okretanja ekrana omogućava okretanje iz pejzažne u portretnu orijentaciju. Ova funkcionalnost može biti korisna ako aplikaciji treba veća visina nego širina.

01 KARAKTERISTIKE EKRANA

Dijagonala	19.5", 49.4cm
Panel	TN LED, mat finiš
Osnovna rezolucija	1600 x 900 (1.4 megapixel)
Format ekrana	16:9
Osvetljenje	250 cd/m²
Statički kontrast	1000:1
Napredni kontrast	12M:1
Vreme odziva (GTG)	5ms
Zona gledanja	horizontalno/vertikalno: 170°/160°, desno/levo: 85°/85°, gore/dole: 80°/80°
Podržane boje	16.7mln (sRGB: 99%; NTSC: 72%)
Horizontalna sinhronizacija	30 - 80KHz
Vidljiva površina Š x V	433.9 x 236.3mm, 17.1 x 9.3"
Razmak piksela	0.27mm
Boja	mat

02 KONEKTORI / KONTROLE

Ulaz signala	VGA x1 DVI x1
HDCP	da
Priključak za slušalice	da

03 KARAKTERISTIKE

Smanjeno emitovanje plave svetlosti	da
Bez treperenja	da
OSD jezici	EN, DE, FR, ES, IT, CN, RU, JP, NL, PL
Kontrolni tasteri	Power, Menu/ Select, Scroll up/Volume, Scroll down/ECO, Exit, Auto
Korisničke kontrole	automatsko prilagođavanje, osvetljenje (osvetljenje, kontrast), geometrija (H. položaj, V. položaj, pixel clock, faza), boja, OSD (položaj H., položaj V.,), jezik, opoziv, ostalo (oštrina, DDC / CI, informacije o prikazu, ACR, način prikaza, logo pri pokretanju), izbor ulaza, podešavanje zvuka (jačina zvuka, isključivanje zvuka)
Zvučnici	2 x 1W

04 MEHANIČKI

Podešavanje položaja prikaza	visina, okret (rotacija), okretanje, nagib
Podešavanje visine	130mm
Rotacija (PIVOT funkcija)	90°
Okretno postolje	90°; 45° levo; 45° desno
Ugao nagiba	22° gore; 5° dole
VESA montiranje	100 x 100mm

05 UKLJUČENI DODACI

Kablovi	Strujni kabl, DVI, Audio
Ostalo	kratko uputstvo, bezbednosni vodič

06 UPRAVLJANJE NAPAJANJEM

Napajanje	interna
Potrošnja energije	% 1W tipično, 0.5W stand by, 0.5W iskljucen

07 ODRŽIVOST

Propisi	CE, TÜV-Bauart, EAC, VCCI-B, RoHS podrška, ErP, WEEE, REACH
Klasa energetske efikasnosti (Regulation (EU) 2017/1369)	F
REACH SVHC	iznad 0.1%: Olova

08 DIMENZIJE / TEŽINA

Dimenzije proizvoda Š x V x D	469.5 x 348 (478) x 210mm
Težina (bez kutije)	4.3kg
EAN kod	4948570112777

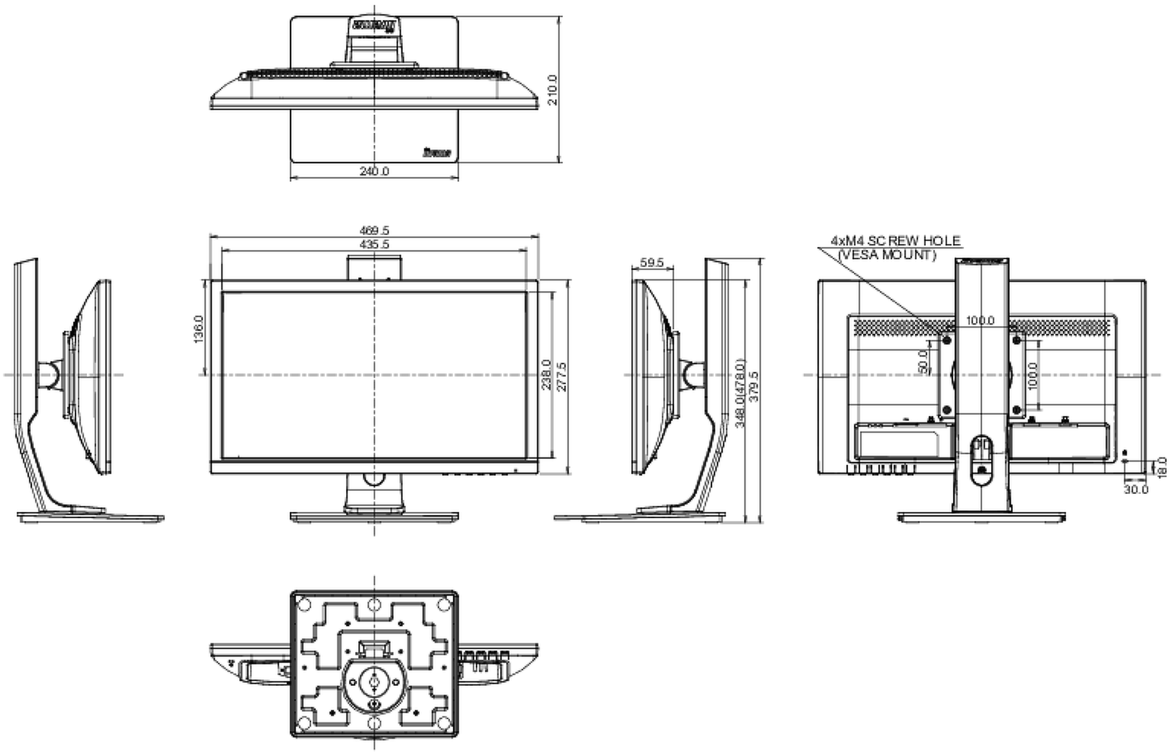

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED