




ProLite LH6564S - a 65" Full HD professional large format display

Incorporating AMVA3 panel technology the LH6564S guarantees great viewing from all angles, high brightness and perfect colour clarity. It features an ambient light sensor delivering exceptional performance with the added benefit of saving on power. Features include PIP and PBP perfect for Video Conferencing or handing multi-input content in many environments. Perfect for true impact in Digital Signage.



AMVA3

AMVA3 technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.

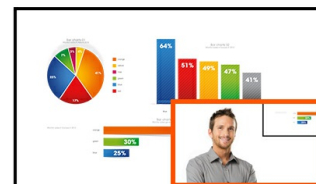

PIP

PIP (Picture in Picture) function allows you to watch images coming from two different sources at the same time.

01 DISPLAY CHARACTERISTICS

| | |
|-------------------------|---|
| Diagonal | 65", 164cm |
| Panel | AMVA3 LED, matte finish |
| Native resolution | 1920 x 1080 (Full HD 1080p, 2.1 megapixel) |
| Aspect ratio | 16:9 |
| Panel brightness | 450 cd/m ² |
| Static contrast | 4 000:1 |
| Advanced contrast | 0M:1 |
| Response time (GTG) | 8ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 1.07B 10bit (8bit + Hi-FRC) |
| Horizontal Sync | 30 - 83kHz |
| Viewable area W x H | 1428.48 x 803.52mm, 56.2 x 31.6" |
| Pixel pitch | 0.744mm |
| Bezel colour and finish | black, matte |

02 INTERFACES / CONNECTORS / CONTROLS

| | |
|----------------------|-------------------------------------|
| Analog signal input | VGA x1 RCA Composite x1 |
| Digital signal input | DVI x1 HDMI x1 DisplayPort x1 |
| Audio input | Mini jack x1 |
| Analog signal output | VGA x1 |
| Audio output | RCA (L/R) x1 Speakers 2 x 12W |
| USB HUB | x0 |

03 FEATURES

| | |
|------------------------------|-------|
| Max. non-stop operating time | 18/7 |
| Housing (bezel) | metal |
| Brightness sensor | yes |

04 GENERAL

| | |
|---------------|---|
| OSD languages | EN, DE, FR, ES, IT, PT, CN, RU, JP, CZ, NL, PL |
| User controls | picture (picture mode, backlight, contrast, brightness, chroma, phase, sharpness, colour temp., noise reduction, film mode, reset), sound (sound mode, treble, bass, balance, surround, speaker, audio source, reset), screen (PAP setting, display wall, aspect, adjust screen, freeze), setting (language, schedule, power save, control setting, network settings, set monitor ID, HDMI control, advanced, information, reset) |
| Plug&Play | DDC2B, Mac OSX |

05 MECHANICAL

| | |
|---------------|---------------------|
| Orientation | landscape, portrait |
| VESA mounting | 400 x 400mm |

06 ACCESSORIES INCLUDED

Cables power, VGA, DVI

Guides quick start guide, safety guide

Remote control yes

07 POWER MANAGEMENT

Power supply DC 1002405060 V

Power usage 250W typical, 0,5W stand by, 0,5W off mode

08 SUSTAINABILITY


Regulations CB, CE, TÜV-Bauart, RoHS support, ErP, WEEE, CU, REACH

REACH SVHC above 0.1%: Lead

09 DIMENSIONS / WEIGHT

Product dimensions W x H x D 1511.5 x 881.5 x 90.5mm

Weight (without box) 47.7kg

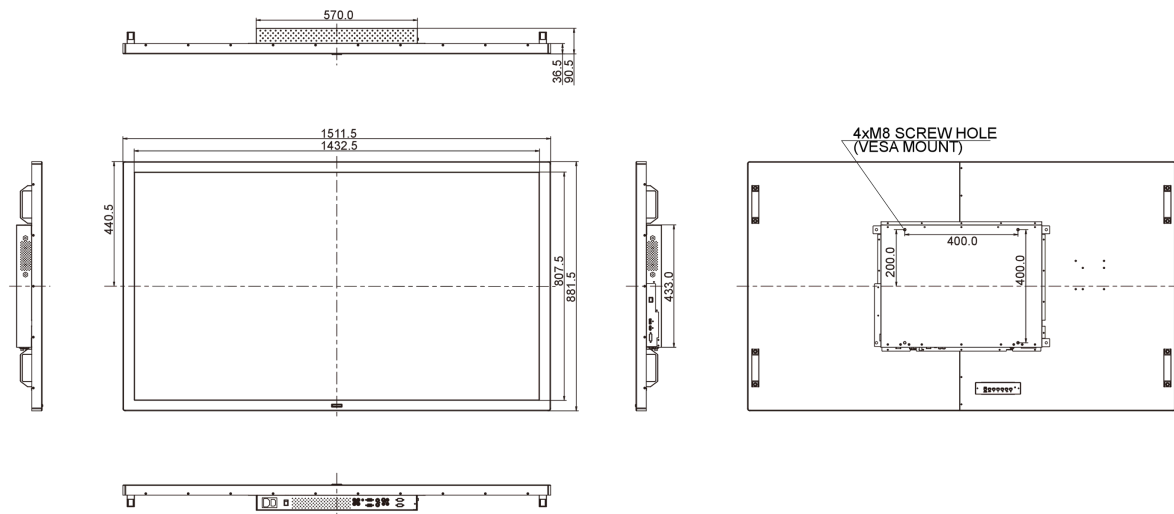

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED