




ProLite TH5564MIS - 55" Full HD professional large format display with 10 compatible touch points

Incorporating the new InfraRed 10 point touch feature along with supreme AMVA3 panel colour performance, this display offers the optimum performance for a truly multi-user interactive experience. With the ability to handle up to 10 individual touch points, the TH5564MIS offers an exceptional capacity within Retail, Education, Training, Corporate and B2B markets. Features include PIP and PBP perfect for Video Conferencing or handing multi-input content in many environments. It also features an ambient light sensor delivering optimal picture quality with the added benefit of saving on power. Incorporating Protection Glass and AG-coating the display can handle harshest environments from the Classroom to Public Domain Retail installation. Landscape and Portrait friendly, a perfect solution for Interactive Digital Signage.



AMVA3

La tecnología AMVA3 ofrece un mayor contraste, negros más oscuros y ángulos de visión mucho mejores que la tecnología estándar TN. La pantalla se verá bien sin importar el ángulo desde que la mires.



Tecnología táctil - Infrarrojo

La tecnología infrarroja utiliza retroiluminación infrarroja. Un toque se registra con gran precisión cuando la luz infrarroja se bloquea con el dedo o el lápiz. Esta tecnología no se basa en una superposición o sustrato, por lo que es imposible "desgastar" físicamente la pantalla táctil.

01 CARACTERÍSTICAS DE LA PANTALLA

Diagonal	54.6", 138.8cm
Pantalla	AMVA3 LED-Backlit, AG80 Coated Glass
Resolución nativa	1920 x 1080 (Full HD 1080p, 2.1 megapixel)
Relación de aspecto	16:9
Brillo	450 cd/m ²
Contraste estático	4000:1
Contraste avanzado	0M:1
Tiempo de respuesta (GTG)	6.5ms
Área de visualización	horizontal/vertical: 178°/178°, derecho/izquierdo: 89°/89°, arriba/abajo: 89°/89°
Soporte de Color	1.07B 10bit (8bit + Hi-FRC)
Sincronización horizontal	30 - 83kHz
Área de visualización h x v	1209.6 x 680.4mm, 47.6 x 26.8"
Pixel pitch	0.63mm
Bisel color y acabado	negro, mate

02 INTERFACES / CONECTORES / CONTROLADORES

Conector de entrada analógica	VGA x1 RCA video x1
Conector de entrada digital	DVI x1 HDMI x2 DisplayPort x1
Salida de audio	Altavoces 2 x 12W
HDCP	si
USB HUB	x0

03 CARACTERÍSTICAS

Opratividad	18/7
Sensor de brillo	si

04 GENERAL

OSD idioma	EN, DE, FR, ES, IT, PT, CN, RU, JP, CZ, NL, PL
Los controles de usuario	picture (picture mode, backlight, contrast, brightness, chroma, phase, sharpness, colour temp., noise reduction, film mode, rest), sound (sound mode, treble, bass, balance, surround, speaker, audio source, reset), screen (PAP setting, display wall, aspect, adjust screen, freeze, touch feature), setting (language, schedule, power save, control setting, network settings, set monitor ID, HDMI control, advanced, information, reset all)
Plug&Play	DDC2B, Mac OSX

05 ASPECTOS MECÁNICOS

Orientación	Horizontal, vertical
Montaje VESA	400 x 400mm

06 ACCESSORIES INCLUDED

Cable	de alimentación, VGA, USB
Guía	guía de inicio rápido, guía de seguridad

Mando a distancia

sí

07 GESTIÓN DE ENERGÍA

Unidad de fuente de alimentación

interno

Fuente de alimentación

AC 100 - 240V, 50/60Hz

Gestión de energía

150W typical, Modo en espera 0.5W, Modo apagado 0.5W

08 SOSTENIBILIDAD

Certificados

CB, CE, TÜV-Bauart, RoHS support, ErP, WEEE, CU, REACH

REACH SVHC

por encima de 0.1% de plomo


09 DIMENSIONES / PESO

Producto dimensiones W x H x D

1271 x 742 x 110.5mm

Peso (sin caja)

43.1kg

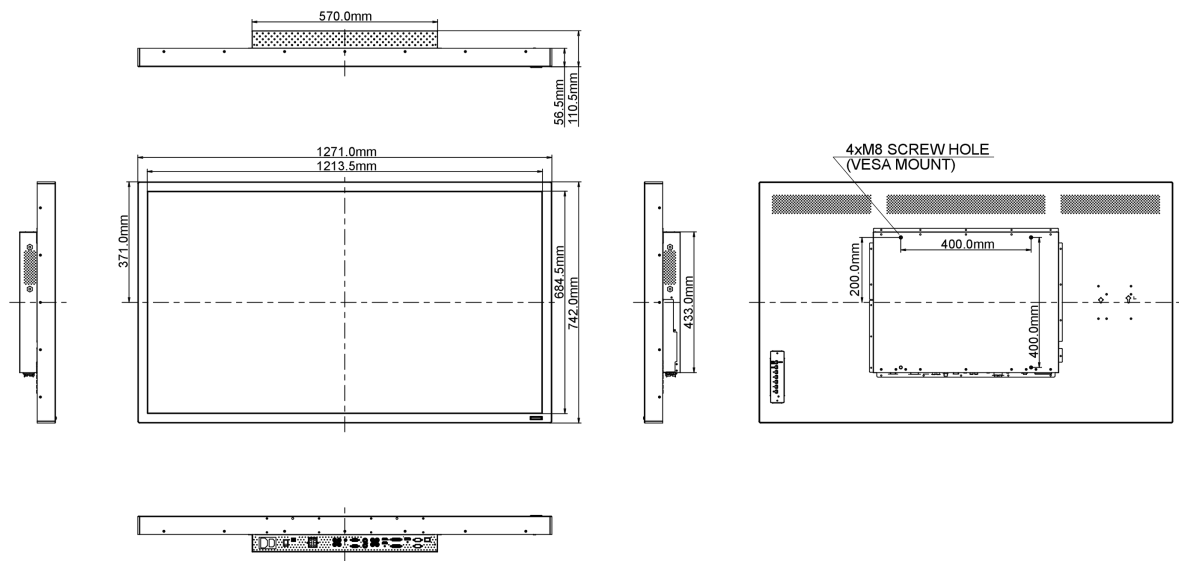

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IYAMA CORPORATION. ALL RIGHTS RESERVED