




## ProLite LE3240S - a 32" Full HD professional large format display

ProLite LE3240S is a 32" Full HD, professional and fan-less LED-backlit display. Incorporating the latest Commercial Grade IPS panel technology, the display guarantees great viewing from all angles, high brightness and exceptional colour clarity. A wide range of video and audio inputs ensures compatibility with multiple platforms. ProLite LE3240S is prepared for easy installation using the VESA wall mount. This display will suit a massive range of applications including public signage, retail, exhibitions and conference centres, POS/POI, control rooms and production facilities.



### IPS

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.



### Speakers

This LED monitor is equipped with two high quality stereo speakers.

## 01 DISPLAY CHARACTERISTICS

Diagonal	31.5", 80cm
Panel	IPS LED
Native resolution	1920 x 1080 (2.1 megapixel Full HD)
Aspect ratio	16:9
Panel brightness	350 cd/m <sup>2</sup>
Static contrast	1 200:1
Response time (GTG)	8ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	16.7mln
Horizontal Sync	30 - 83kHz
Viewable area W x H	698.4 x 392.85mm, 27.5 x 15.5"
Pixel pitch	0.364mm
Bezel colour and finish	black, matte

## 02 INTERFACES / CONNECTORS / CONTROLS

Analog signal input	VGA x1 Component video x1 (RGB Y(CVBS)/Pb/Pr)
Digital signal input	DVI x1 HDMI x1
Audio input	RCA (L/R) x1 Mini jack x1
Monitor control input	RS-232c x1 RJ45 (LAN) x1 IR x1
Audio output	RCA (L/R) x1 Speakers 2 x 10W
Monitor control output	RS-232c x1 IR loop through x1
HDCP	yes
USB ports	x1 (v.2.0 media playback)

## 03 FEATURES

Max. non-stop operating time	12/7
Media playback	yes

## 04 GENERAL

OSD languages	EN, DE, FR, ES, IT, RU, CZ, NL, PL
Control buttons	Power, Mute, Input, +, -, Up, Down, Menu
User controls	picture (picture mode, backlight, contrast, brightness, chroma, phase, sharpness, colour temp., noise reduction, film mode, rest), sound (sound mode, treble, bass, balance, surround, speaker, audio source, reset), screen (PAP setting, display wall, aspect, adjust screen, freeze), setting (language, schedule, power save, control setting, network settings, set monitor ID, HDMI control, advanced, information, reset all)
Plug&Play	DDC2B, Mac OSX

## 05 MECHANICAL

Orientation	landscape
-------------	-----------

Fanless design	yes
VESA mounting	100 x 100mm, 200 x 200mm

## 06 ACCESSORIES INCLUDED

Cables	power C7, VGA, DVI, RS-232c
Guides	quick start guide, safety guide
Remote control	yes

## 07 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	42W typical, 0.5W stand by, 0.5W off mode

## 08 SUSTAINABILITY

Regulations	CE, TÜV-Bauart, RoHS support, ErP, WEEE, REACH
REACH SVHC	above 0.1%: Lead

## 09 DIMENSIONS / WEIGHT

Product dimensions W x H x D	726.5 x 425.2 x 63.6mm
Weight (with box)	5.2kg
EAN code	4948570114177

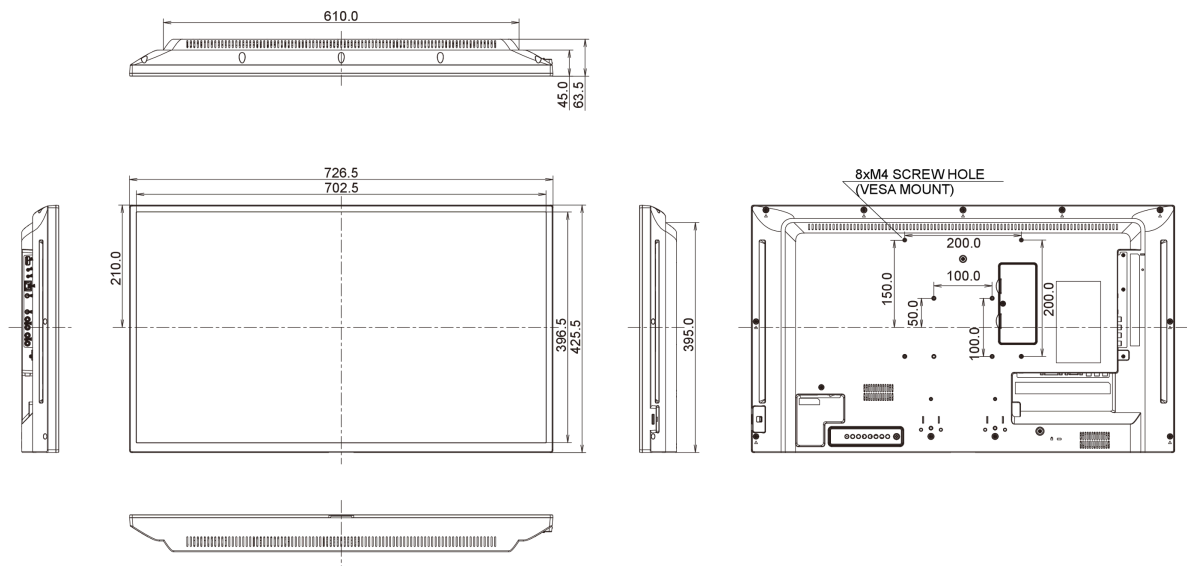

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED