





70" Interactive LCD Touchscreen with integrated annotation software and USB playback

The TH7067MIS-B1AG is a 70", 10-point touchscreen with integrated interactive EasiNote writing software allowing users to make annotations on files opened directly from a USB device or internal storage. The display supports also playback of presentations, video and almost any other type of content stored on the USB device or internal memory. The high quality commercial ASV LCD screen guarantees great viewing angles from all sides and delivers superb image performance from anywhere in a class or meeting-room. The Anti Glare screen drastically reduces ambient reflection in high brightness environments without compromising sharp clarity of the content. Unlike interactive whiteboards, there are no shadows or reductions in image performance to contend with. The TH7067MIS-B1AG is a perfect solution for educational and corporate use.



Touch technology - Infrared

The infrared technology uses infrared backlight. A touch event is registered with great accuracy when the infrared light is blocked by finger or stylus. This technology does not rely on an overlay or substrate, so it is impossible to physically "wear out" the touchscreen. Moreover the display characteristics remain virtually unaffected by the touch functionality.



Note

Make notes, sketch, draw, write and share your ideas with your team or students or save them to a cloud drive or USB-stick; collaboration was never easier. Turn your iiyama professional display into a interactive digital whiteboard with Note, our Android-based writing and annotation software.

01 DISPLAY CHARACTERISTICS

Diagonal	69.5", 176.6cm
Panel	ASV LED-Backlit, AG80 Coated Glass
Native resolution	1920 x 1080 (Full HD 1080p, 2.1 megapixel)
Aspect ratio	16:9
Brightness	350 cd/m ² with touch
Light transmittance	88%
Static contrast	4 000:1 with touch
Advanced contrast	0M:1
Response time (GTG)	6ms
Viewing zone	horizontal/vertical: 176°/176°, right/left: 88°/88°, up/down: 88°/88°
Colour support	1.07B 10bit
Horizontal Sync	30 - 83kHz
Viewable area W x H	1538.88 x 865.62mm, 60.6 x 34.1"
Pixel pitch	0.802mm
Bezel colour and finish	black, matte

02 TOUCH

Touch technology	infrared
Touch method	stylus, finger
Touch interface	USB
Supported operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.

03 INTERFACES / CONNECTORS / CONTROLS

Analog signal input	VGA x3
Digital signal input	DVI x1 HDMI x3
Audio output	Speakers 2 x 10W
USB HUB	x0

04 FEATURES

Extra	integrated, interactive annotation tools and applications allowing to browse the Internet, show documents, presentations, video, etc.
Max. non-stop operating time	24/7
Media playback	yes

05 GENERAL

OSD languages	EN, DE, FR, ES, IT, PT, CN, RU, JP, CZ, NL, PL
User controls	input, brightness, volume (volume, bass, treble, balance, sound mode, mute), zoom (H-position, V-position, phase, clock, aspect ratio, auto), screen (brightness, contrast, sharpness, colour temp.), advanced (Ethernet, display, storage, apps, language & input, date & time, startup and shutdown, floating annotations, about)
Plug&Play	DDC2B, Mac OSX

06 MECHANICAL

Orientation landscape, portrait

VESA mounting 400 x 400mm

07 ACCESSORIES INCLUDED

Cables power, VGA, USB

Touch pen x1

Guides quick start guide, safety guide

Remote control yes

08 POWER MANAGEMENT

Power supply unit internal

Power supply AC 100 - 240V, 50/60Hz

Power usage 223W typical, 0,5W stand by, 0,5W off mode

09 SUSTAINABILITY


Regulations CB, CE, RoHS support, ErP, WEEE, CU, REACH

REACH SVHC above 0.1%: Lead

10 DIMENSIONS / WEIGHT

Product dimensions W x H x D 1638 x 964.5 x 102.5mm

Weight (without box) 64kg

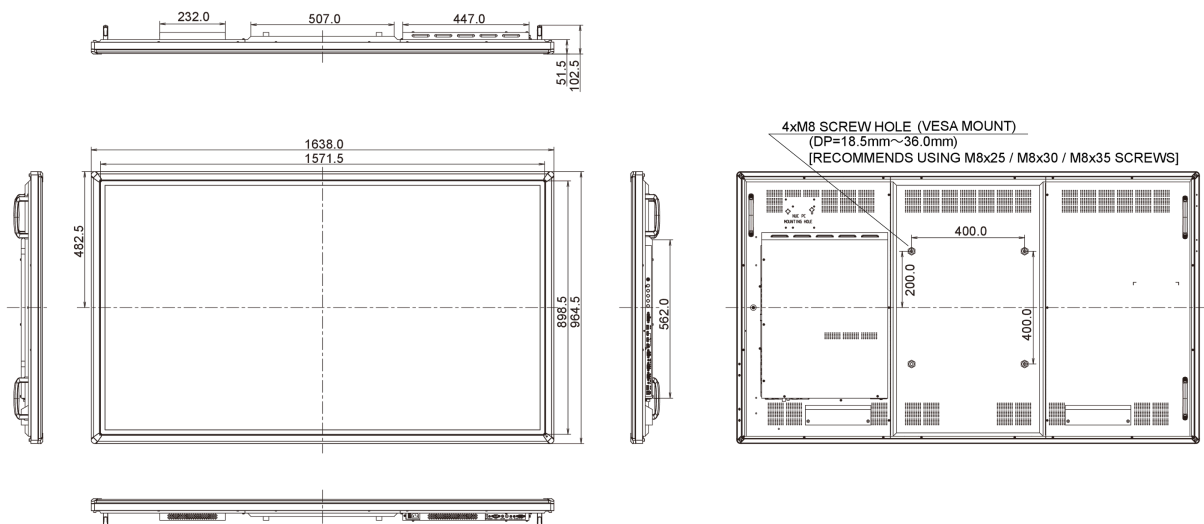

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IYAMA CORPORATION. ALL RIGHTS RESERVED