



### 70" Interactive LCD Touchscreen with integrated annotation software and USB playback

The TH7067MIS-B2AG is a 70", 10-point touchscreen with integrated interactive EasiNote writing software allowing users to make annotations on files opened directly from a USB device or internal storage. The display supports also playback of presentations, video and almost any other type of content stored on the USB device or internal memory. The high quality commercial UV<sup>2</sup>A LCD screen guarantees great viewing angles from all sides and delivers superb image performance from anywhere in a class or meeting-room. The Anti Glare screen drastically reduces ambient reflection in high brightness environments without compromising sharp clarity of the content. Unlike interactive whiteboards, there are no shadows or reductions in image performance to contend with. The TH7067MIS-B2AG is a perfect solution for educational and corporate use.



Touch technology - Infrared

The infrared technology uses infrared backlight. A touch event is registered with great accuracy when the infrared light is blocked by finger or stylus. This technology does not rely on an overlay or substrate, so it is impossible to physically "wear out" the touchscreen. Moreover the display characteristics remain virtually unaffected by the touch functionality.



Note

Make notes, sketch, draw, write and share your ideas with your team or students or save them to a cloud drive or USB-stick; collaboration was never easier. Turn your iiyama professional display into a interactive digital whiteboard with Note, our Android-based writing and annotation software.

## 01 DISPLAY CHARACTERISTICS

Diagonal	69.5", 176.6cm
Panel	UV <sup>2</sup> A Direct LED, AG coated glass
Native resolution	1920 x 1080 (Full HD 1080p, 2.1 megapixel)
Aspect ratio	16:9
Panel brightness	350 cd/m <sup>2</sup>
Brightness	310 cd/m <sup>2</sup> with touch
Light transmittance	88%
Static contrast	4 000:1 with touch
Advanced contrast	0M:1
Response time (GTG)	5ms
Viewing zone	horizontal/vertical: 176°/176°, right/left: 88°/88°, up/down: 88°/88°
Colour support	16.7mln
Horizontal Sync	30 - 83kHz
Viewable area W x H	1538.88 x 865.62mm, 60.6 x 34.1"
Pixel pitch	0.802mm
Bezel colour and finish	black, matte

## 02 TOUCH

Touch technology	infrared
Touch points	10 (multi touch (10 compatible touch points - HID, only with supported OS) activated by finger or pen, no pressure required to generate touch)
Touch method	stylus, finger
Touch interface	USB
Supported operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.

## 03 INTERFACES / CONNECTORS / CONTROLS

Analog signal input	VGA x3
Digital signal input	DVI x1 HDMI x3
Audio input	Mini jack x3
Analog signal output	VGA x1
Audio output	Mini jack x1 Speakers 2 x 10W
USB HUB	x0

## 04 FEATURES

Extra	integrated, interactive annotation tools and applications allowing to browse the Internet, show documents, presentations, video, etc.
Max. non-stop operating time	24/7
Media playback	yes
Glass thickness	4mm
Housing (bezel)	metal

## 05 GENERAL

**OSD languages**

EN, DE, FR, ES, IT, PT, CN, RU, JP, CZ, NL, PL

**User controls**

input, brightness, volume (volume, bass, treble, balance, sound mode, mute), zoom (H-position, V-position, phase, clock, aspect ratio, auto), screen (brightness, contrast, sharpness, colour temp.), advanced (Ethernet, display, storage, apps, language &amp; input, date &amp; time, startup and shutdown, floating annotations, about)

**Plug&Play**

DDC2B, Mac OSX

**06 MECHANICAL****Orientation**

landscape

**Fanless design**

yes

**07 ACCESSORIES INCLUDED****Cables**

power, VGA, USB, HDMI

**Touch pen**

x3

**Guides**

quick start guide, safety guide

**Remote control**

yes (batteries included)

**08 POWER MANAGEMENT****Power supply unit**

internal

**Power supply**

AC 100 - 240V, 50/60Hz

**Power usage**

166.65W typical, 0,5W stand by, 0,5W off mode

**09 SUSTAINABILITY****Regulations**

CB, CE, TÜV-Bauart, RoHS support, ErP, WEEE, CU, REACH

**REACH SVHC**


above 0.1%: Lead

**10 DIMENSIONS / WEIGHT****Product dimensions W x H x D**

1638 x 964.5 x 97.5mm

**Weight (without box)**

50.5kg

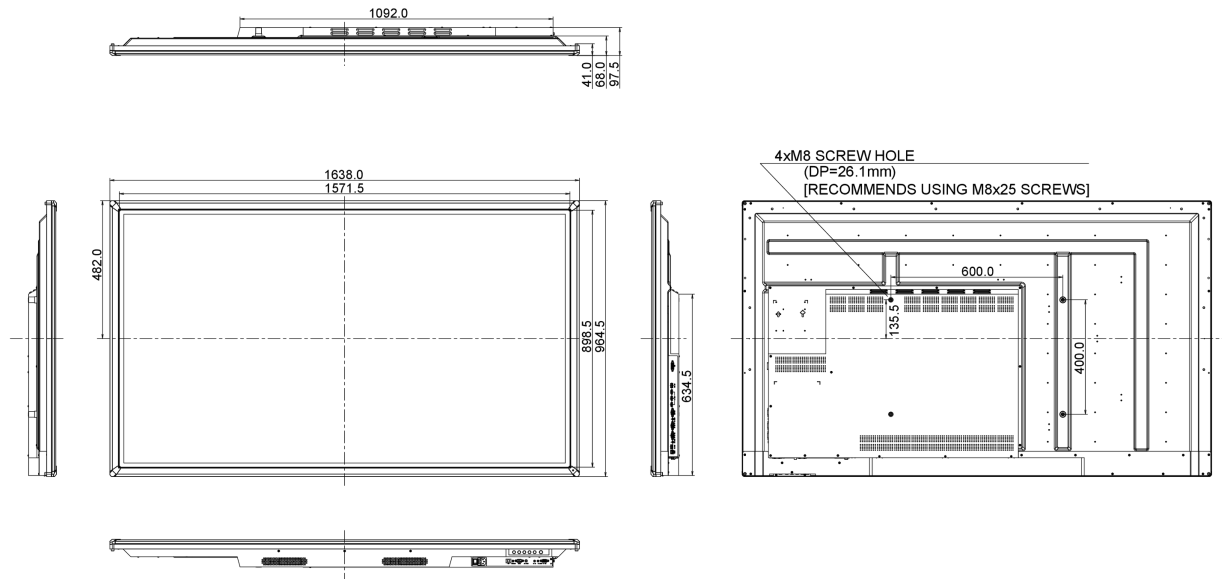

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IYAMA CORPORATION. ALL RIGHTS RESERVED