



24" Full HD monitor with VA panel

ProLite X2474HV - a 24" LED backlit LCD Screen featuring VA panel technology, guarantees accurate and consistent colour reproduction with wide viewing angles. A solid solution for both home and the office.



VA matrix

VA panel technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.



Flicker-free + Blue light

The ultimate solution for the comfort and health of your eyes. Flicker-free monitors with the blue light reducer function substantially reduce the strain and fatigue caused by flickering and blue light emittance of regular monitors.

01 DISPLAY CHARACTERISTICS

Diagonal	23.6", 60cm
Panel	VA LED, matte finish
Native resolution	1920 x 1080 (Full HD 1080p, 2.1 megapixel)
Aspect ratio	16:9
Brightness	250 cd/m ² typical
Static contrast	3000:1 typical
Advanced contrast	12M:1
Response time	4ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	16.7mIn 8bit (6bit + Hi-FRC) (sRGB: 99%; NTSC: 72%)
Horizontal Sync	30 - 80kHz
Vertical Sync	55 - 75Hz
Viewable area W x H	521.3 x 293.2mm, 20.5 x 11.5"
Pixel pitch	0.272mm

02 INTERFACES / CONNECTORS / CONTROLS

Signal input	VGA x1
USB HUB	x0

03 FEATURES

OSD languages	EN, DE, FR, ES, IT, PT, CN, RU, JP, CZ, NL, PL
Control buttons	Power, Input Select/ Selct, Scroll up, Scroll down/ i-Style Colour, Menu/ Exit
User controls	auto adjust, picture adjust (contrast, brightness, ACR, ECO, OD), colour adjust, information, manual image adjust (H/V position, clock, phase, sharpness, video mode adjust, blue light reducer), setup menu (language, OSD position, OSD time out, OSD background, opening logo, LED), memory recall

04 MECHANICAL

Tilt angle	20° up; 3° down
VESA mounting	100 x 100mm

05 ACCESSORIES INCLUDED

Cables	power, VGA
Other	quick start guide, safety guide

06 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	17W typical, 0.5W stand by

07 SUSTAINABILITY

Other	REACH SVHC above 0.1%: Lead
-------	-----------------------------

08 DIMENSIONS / WEIGHT

Product dimensions W x H x D	547.5 x 405.5 x 177mm
Weight (without box)	3.2kg
EAN code	4948570115501

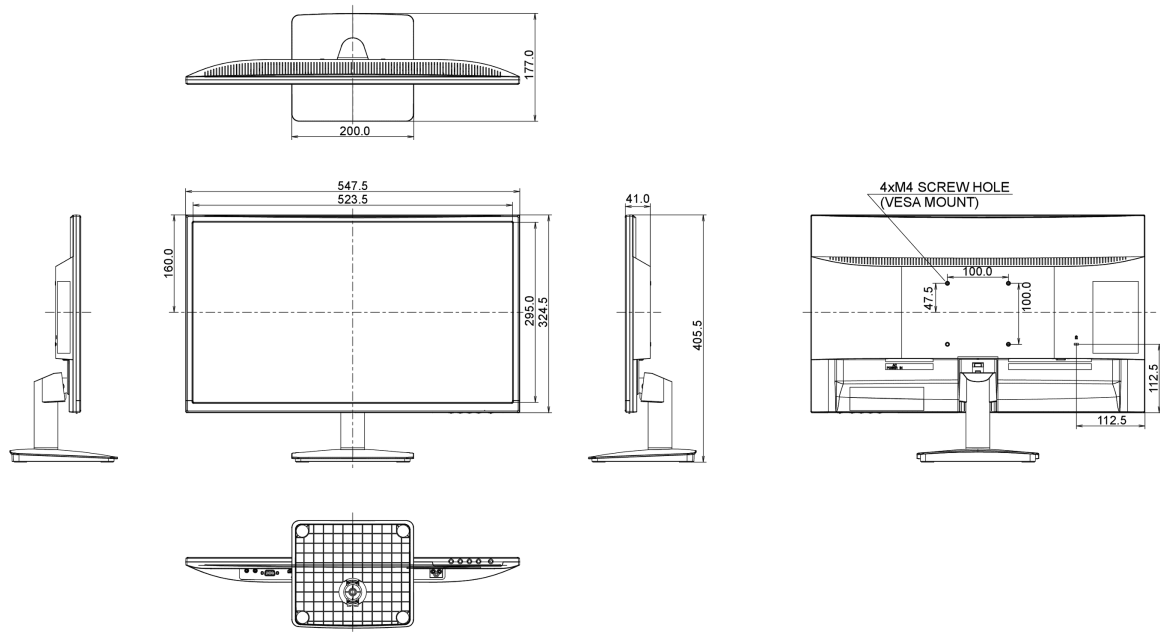

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED