



The ProLite E2473HS LED-backlit monitor is a FHD (1920x1080) 24" display with high specifications, triple input connectivity (VGA, DVI and 2xHDMI) and fast 2ms response for excellent sharpness in high definition. VESA mount compatibility along with one HDMI input and headphone connector on the side of the cabinet ensure great comfort of usage and the X-Res Technology feature helps to deliver best quality pictures even if the source is not perfect, like movies made with mobile device.

ProLite X2474HV - a 24" LED backlit LCD Screen featuring VA panel technology, guarantees accurate and consistent colour reproduction with wide viewing angles. A solid solution for both home and the office.



VA matrix

VA panel technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.



Flicker-free + Blue light

The ultimate solution for the comfort and health of your eyes. Flicker-free monitors with the blue light reducer function substantially reduce the strain and fatigue caused by flickering and blue light emittance of regular monitors.

## 01 DISPLAY CHARACTERISTICS

Diagonal	23.6", 60cm
Panel	TN LED-Backlit
Native resolution	1920 x 1080 (Full HD 1080p, 2.1 megapixel)
Aspect ratio	16:9
Panel brightness	250 cd/m <sup>2</sup>
Static contrast	3000:1
Advanced contrast	12M:1
Response time (GTG)	4ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	16.7mIn (sRGB: 99%; NTSC: 72%)
Horizontal Sync	30 - 80kHz
Viewable area W x H	521.3 x 293.2mm, 20.5 x 11.5"
Pixel pitch	0.272mm

## 02 INTERFACES / CONNECTORS / CONTROLS

Signal input	VGA x1
USB HUB	x0

## 03 FEATURES

OSD languages	EN, DE, FR, ES, IT, PT, CN, RU, JP, CZ, NL, PL
Control buttons	Power, Select/ Input Select, Scroll up/ X-Res technology, Scroll down/ i-Style Colour, Menu
User controls	auto adjust, picture adjust (contrast, brightness, ACR, ECO, OD, X-Res Technology), input select, audio adjust (volume, mute, HDMI audio), colour adjust, information, manual image adjust (clock, H/V position, phase, sharpness, video mode adjust), setup menu (language, OSD position, OSD time out, OSD background, opening logo, LED), memory recall

## 04 MECHANICAL

Tilt angle	20° up; 3° down
VESA mounting	100 x 100mm

## 05 ACCESSORIES INCLUDED

Cables	power, VGA
Other	quick start guide, safety guide

## 06 POWER MANAGEMENT

Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	17W typical, 0.5W stand by, 0.5W off mode

## 07 SUSTAINABILITY


Regulations	RoHS support, ErP, WEEE, REACH, ENERGY STAR <sup>®</sup> * (*This model meets old ENERGY STAR <sup>®</sup> criteria only.)
-------------	--

## 08 DIMENSIONS / WEIGHT

Product dimensions W x H x D 547.5 x 405.5 x 177mm

Weight (without box) 3.2kg

EAN code 4948570115501

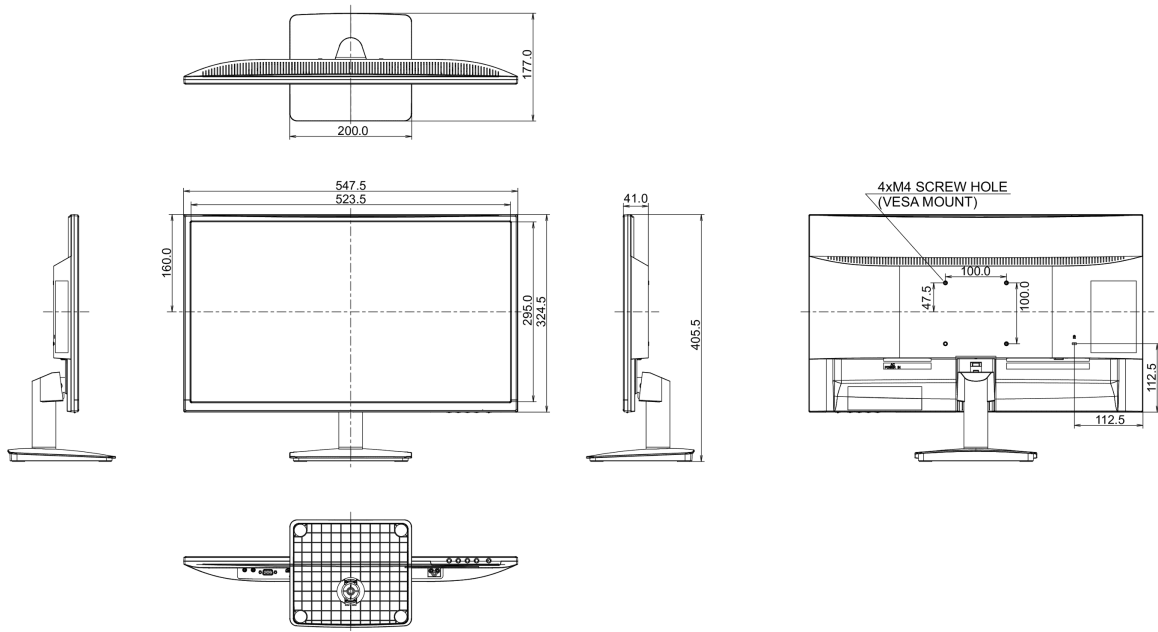

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IYAMA CORPORATION. ALL RIGHTS RESERVED