

### IPS

IPS tehnologija nudi veći kontrast, tamnije crne i mnogo bolje uglove gledanja od standardne TN tehnologije. Ekran će izgledati dobro bez obzira pod kojim ga uglom gledate.



### OPS PC SLOT

Ugrađeni slot za proširenje podržava Open Pluggable Specification (OPS) standard; pojednostavljuje instalaciju plug-in računara za Digital Signage primenu.

## 01 KARAKTERISTIKE EKRANA

|                             |   |
|-----------------------------|---|
| Dizajn                      | Ultra tanak okvir   |
| Dijagonala                  | 41.9", 106.5cm  |
| Panel                       | IPS LED, matte finish, haze 10%   |
| Osnovna rezolucija          | 1920 x 1080 (2.1 megapixel Full HD)   |
| Format ekrana               | 16:9  |
| Osvetljenje                 | 700 cd/m <sup>2</sup>   |
| Statički kontrast           | 1300:1  |
| Vreme odziva (GTG)          | 8ms   |
| Zona gledanja               | horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89° |
| Podržane boje               | 1.07B 10bit (8bit + Hi-FRC)   |
| Horizontalna sinhronizacija | 30 - 83KHz  |
| Vidljiva površina Š x V     | 927.94 x 521.96mm, 36.5 x 20.5"   |
| Razmak piksela              | 0.4833mm  |
| Boja okvra                  | crna, mat   |

## 02 KONEKTORI / KONTROLE

|                         |   |
|-------------------------|---|
| Ulaz analognog signala  | VGA x1<br>RCA Kompozitni x1   |
| Ulaz digitalnog signala | DVI x1<br>HDMI x2<br>DisplayPort x1   |
| Audio ulaz              | Mini konektor x1  |
| Kontrolni ulaz          | RS-232c x1<br>RJ45 (LAN) x1<br>IR x1  |
| Digitalni izlaz signala | DisplayPort x1 (v.1.2 Daisy Chain multi-stream)   |
| Audio izlaz             | Mini konektor x1<br>RCA (L/R) x1<br>Zvučnici 2 x 10W  |
| Monitor kontrolni izlaz | RS-232c x1<br>IC loop x1<br>OPS Slot x1 (OPS Intel 80 Pin Standard-Slot. Not compatible with OPS-C) |
| HDCP                    | da  |
| USB portovi             | x1 (v.2.0)  |

## 03 KARAKTERISTIKE

|                                   |         |
|-----------------------------------|---------|
| Dodatno                           | handles |
| Maksimalno neprekidno radno vreme | 24/7    |
| Video zid / daisy chain           | yes     |
| Reprodukcija medija               | da      |
| Kućište (okvir)                   | metal   |

## 04 OPŠTE

|            |  |
|------------|--|
| OSD jezici | EN, DE, FR, ES, IT, PT, CN, RU, JP, CZ, NL, PL |
|------------|--|

**Korisničke kontrole**

picture (picture style, restore style, backlight, colour, sharpness, noise reduction, MPEG artifact reduction, digital crystal clear, advanced, game or computer, format and edges) sound (sound style, restore style, bass, treble, balance, surround mode, audio out, advanced) tiling (enable, H. monitors, V. monitors, position, frame comp.) general settings (menu language, monitor ID, auto search, clock, scheduling, sleep timer, easylink, auto adjust, local KB lock, RC lock, pixel shift, smart power, wake on lan, switch on state, LED, switch delay, logo, APM, information OSD, displayport ver. network control port, factory settings) network settings (view network settings, network configuration, static IP configuration, digital media renderer-DMR, network name)

**Plug&Play**

DDC2B, Mac OSX

**05 MEHANIČKI****Orijentacija**

pejzaž, portret

**VESA montiranje**

200 x 200mm

**Temperatura skladištenja**

- 20°C - 60°C

**06 UKLJUČENI DODACI****Kablovi**

Strujni kabl, DVI, HDMI, mDP - DP, DP, RS-232c

**Upustva**

kratko uputstvo, bezbednosni vodič

**Daljinski upravljač**

da (baterije uključene)

**07 UPRAVLJANJE NAPAJANJEM****Napajanje**

interna

**Potrošnja energije**

% 1W tipično, 0.5W stand by, 0.5W iskljucen

**08 ODRŽIVOST****Propisi**

CB, CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, CU, REACH

**REACH SVHC**

iznad 0.1%: Olova

**09 DIMENZIJE / TEŽINA****Dimenzije proizvoda Š x V x D**


947 x 541 x 71mm

**Težina (bez kutije)**

15.3kg

**EAN kod**

4948570115860

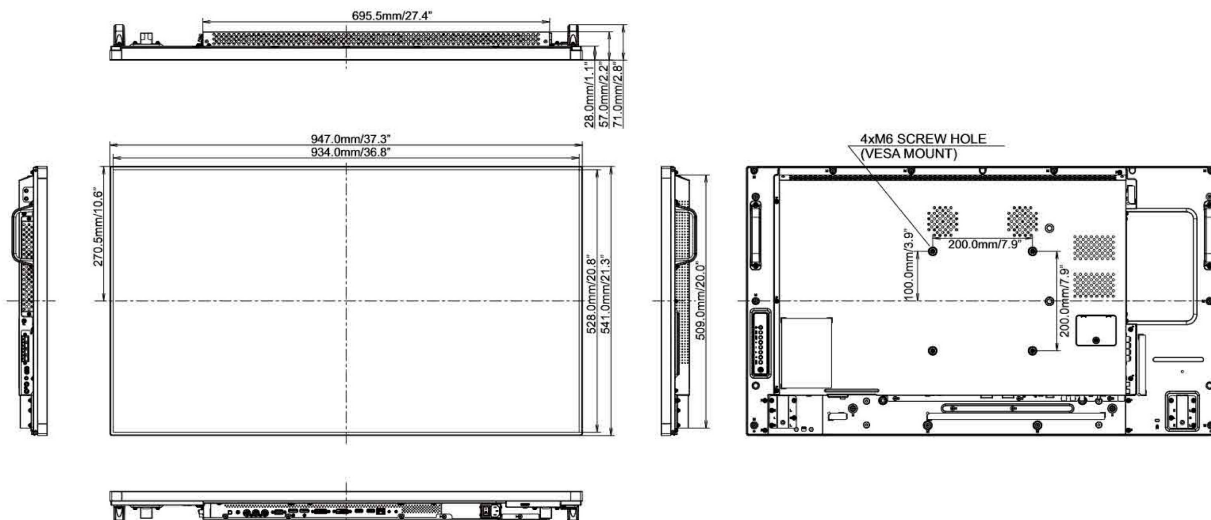

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED