




22.5" 1920 x 1200 monitor featuring IPS panel technology and a height adjustable stand

The demanding data and application heavy world needs a display that creates a more productive work place. With 1920 x 1200 resolution, the XUB2395WSU offers 11% more height with the same width as a Full HD display, which works much better for spreadsheets, word documents and browsing the Internet. The height adjustable stand with PIVOT function allows you to easily adjust the monitor position to your preferences and the IPS panel technology assures accurate and consistent colour reproduction with wide viewing angles.



IPS

IPS technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.



Flicker-free + Blue light

The ultimate solution for the comfort and health of your eyes. Flicker-free monitors with the blue light reducer function substantially reduce the strain and fatigue caused by flickering and blue light emittance of regular monitors.

01 DISPLAY CHARACTERISTICS

| | |
|---------------------|---|
| Design | ultra slim |
| Diagonal | 22.5", 57.15cm |
| Panel | IPS LED, matte finish |
| Native resolution | 1920 x 1200 (2.3 megapixel WUXGA) |
| Aspect ratio | 16:10 |
| Brightness | 250 cd/m ² typical |
| Static contrast | 1000:1 typical |
| Advanced contrast | 5M:1 |
| Response time | 4ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 1.07B 10bit (sRGB: 102%, NTSC: 72%) |
| Horizontal Sync | 30 - 89KHz |
| Vertical Sync | 50 - 76Hz |
| Viewable area W x H | 488.2 x 297.2mm, 19.2 x 11.7" |
| Pixel pitch | 0.254x0.248mm |
| Colour | matte, black |

02 INTERFACES / CONNECTORS / CONTROLS

| | |
|---------------------|--|
| Signal input | VGA x1 (max. 1920 x 1200 @60Hz) HDMI x1 (max. 1920 x 1200 @60Hz) DisplayPort x1 (max. 1920 x 1200 @75Hz) |
| USB HUB | x2 (v.2.0) |
| HDCP | yes |
| Headphone connector | yes |

03 FEATURES

| | |
|--------------------|---|
| Blue light reducer | yes |
| Flicker free | yes |
| FreeSync support | DisplayPort |
| OSD languages | EN, DE, FR, RU, JP, NL, PL |
| Control buttons | Auto, -/ECO, +/Volume/Blue Light Reducer, Menu, Power |
| User controls | luminance (contrast, brightness, i-Style Colour, ACR, ECO), image settings (pixel clock, phase, H. position, V. position, aspect ratio), colour settings (gamma, colour temp.), OSD (H. position, V. position, OSD timeout, language), extra (reset, DDC/CI, signal select, OD, audio input, opening logo, information) |
| Speakers | 2 x 2W |
| Convenience | Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OSX |

04 MECHANICAL

| | |
|------------------------------|--|
| Display position adjustments | height, pivot (rotation), swivel, tilt |
| Height adjustment | 130mm |
| Rotation (PIVOT function) | 90° |
| Swivel stand | 90°; 45° left; 45° right |
| Tilt angle | 22° up; 5° down |
| VESA mounting | 100 x 100mm |

05 ACCESSORIES INCLUDED

| | |
|--------|---------------------------------|
| Cables | power, USB, DP |
| Other | quick start guide, safety guide |

06 POWER MANAGEMENT


| | |
|-------------------|---|
| Power supply unit | internal |
| Power supply | AC 100 - 240V, 50/60Hz |
| Power usage | 24W typical, 0.5W stand by, 0.5W off mode |

07 SUSTAINABILITY

| | |
|-------------------------|--|
| Regulations | TCO, CE, TÜV-Bauart, RoHS support, Energy Star , WEEE, EPEAT, CU |
| Energy efficiency class | A |
| Other | REACH SVHC above 0.1%: Lead |

08 DIMENSIONS / WEIGHT

| | |
|------------------------------|-------------------------|
| Product dimensions W x H x D | 499 x 385 (515) x 230mm |
| Weight (without box) | 5.4kg |
| EAN code | 4948570116386 |

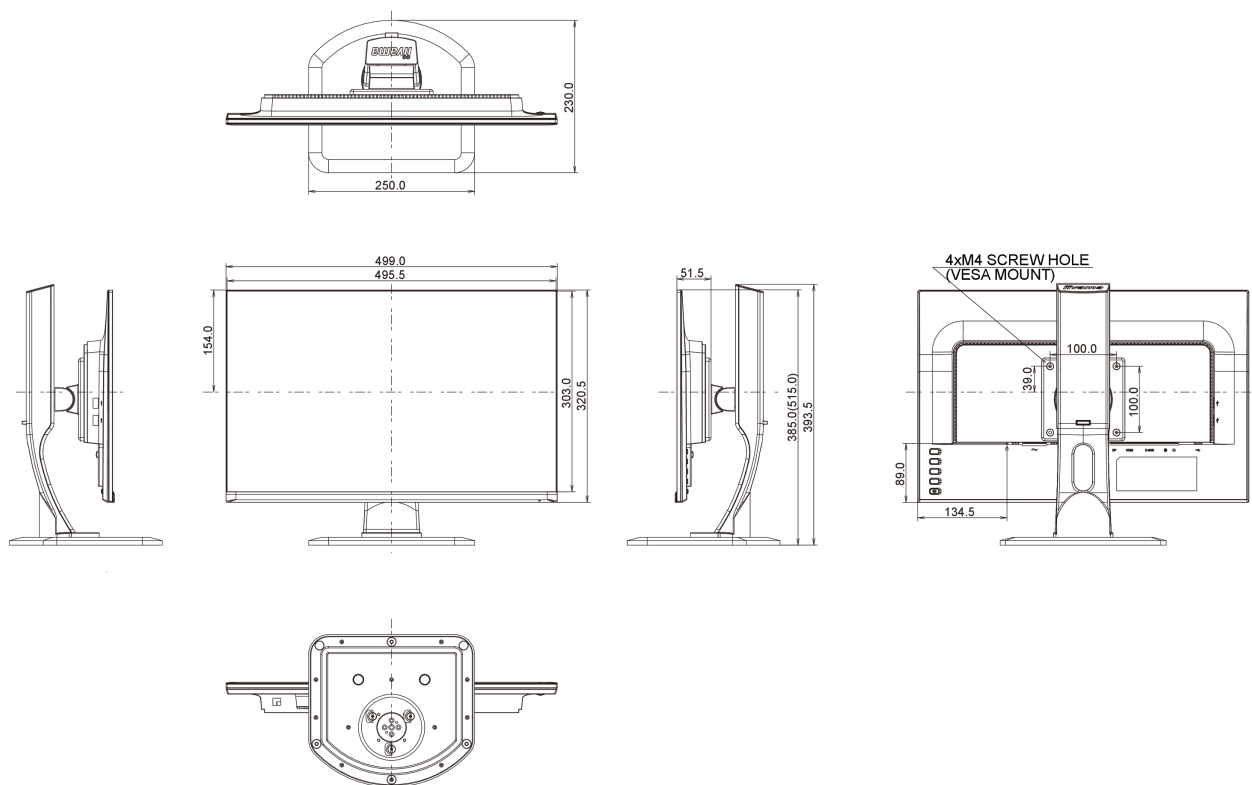

09 EU ENERGY EFFICIENCY LABEL

| | |
|--------------|-----------------------|
| Manufacturer | iiyama |
| Model | ProLite XUB2395WSU-B1 |

| | |
|-------------------------|---------------|
| Energy efficiency class | A |
| Power in Standby | 0.5W stand by |
| Power in OFF Mode | 0.5W off mode |
| Resolution | 1920 x 1200 |

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED