



**38" stretched digital signage display with 24/7 operating time, 1000cd/m<sup>2</sup> and landscape and portrait orientation**

Give your sales promotions and your in-store displays maximum impact and visibility with the ProLite S3820HSB-B1. The S3820HSB is a 38" (1920x540) digital signage display that is ideally suited for retail, transportation, business and health care environments where a regular 16:9 display will not fit.


With a 24/7 operating time, landscape and portrait orientation and brightness of 1000cd/m<sup>2</sup>, this display can be installed anyhow and anywhere you want, ensuring an optimal fit and maximum exposure. The S3820HSB is fanless, only weighs 8.8 kg and comes with two handles for easy handling and installation.

Also available in 28": [ProLite S2820HSB-B1](#)



**VESA**

VESA mount compliance means you can easily mount the display to any mounting that complies with the VESA standard.



**24/7**

24/7 displays are designed for a continuous operation.

## 01 DISPLAY CHARACTERISTICS

Diagonal	38", 96.5cm
Panel	MVA LED, matte finish
Native resolution	1920 x 540 @60Hz (1.0 megapixel)
Aspect ratio	16:4.5
Brightness	1000 cd/m <sup>2</sup> typical
Static contrast	4000:1 typical
Response time	8ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	16.7mln 8bit
Horizontal Sync	30 - 83KHz
Vertical Sync	50 - 76Hz
Viewable area W x H	919.3 x 258.5mm, 36.2 x 10.2"
Bezel width (sides, top, bottom)	19.1mm, 16.4mm, 25mm
Pixel pitch	0.1596 x 0.4788mm
Bezel colour and finish	black, matte

## 02 INTERFACES / CONNECTORS / CONTROLS

Analog signal input	VGA x1
Digital signal input	DVI x1 HDMI x1 (v.2.0)
Audio input	Mini jack x1
Monitor control input	RS-232c x1
Audio output	Speakers 2 x 5W
Monitor control output	RS-232c x1

## 03 FEATURES

Extra	Sunlight readable, portrait orientation left and right, handles
Max. non-stop operating time	24/7
Housing (bezel)	metal
Brightness sensor	yes

## 04 GENERAL

OSD languages	EN
Control buttons	Power, Increase / Input Select, Menu / Enter, Decrease / Brightness
User controls	brightness (OSD brightness, ambient light sensor with OSD offset, brightness, contrast, exit), signal select, sound (volume, mute, exit), color (color adjustment, sRGB, color temp, exit), image (auto adjustment, clock, phase, H. position, V. position, exit), tools (OSD control, reset, sharpness, exit), exit.
Plug&Play	DDC2B, Mac OSX

## 05 MECHANICAL

Orientation	landscape, portrait
Fanless design	yes
VESA mounting	400 x 100mm

Operation temperature range	0°C - 50°C
Storage temperature range	- 20°C - 60°C
MTBF	100.000 hours

## 06 ACCESSORIES INCLUDED

Cables	power, HDMI (1.8m), RS-232c
Guides	quick start guide, safety guide
Other	light sensor cable

## 07 POWER MANAGEMENT


Power supply unit	external
Power supply	DC 12 V
Power usage	42.5W typical, 0.5W stand by, 0.5W off mode

## 08 SUSTAINABILITY

Regulations	CB, CE, CU
Energy efficiency class	B
Other	REACH SVHC above 0.1%: Lead

## 09 DIMENSIONS / WEIGHT

Product dimensions W x H x D	962.6 x 304.9 x 54.2mm
Weight (without box)	8.8kg
EAN code	4948570116959

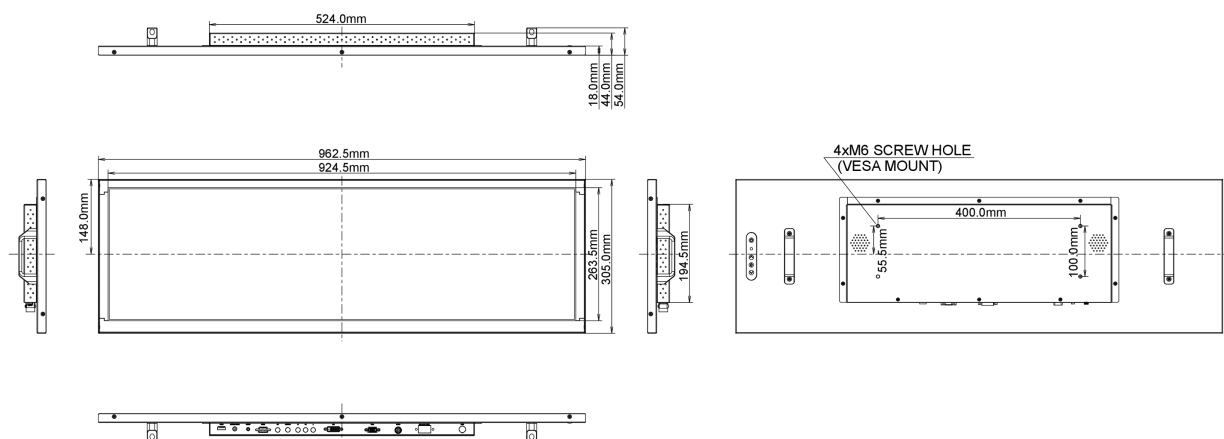

## 10 EU ENERGY EFFICIENCY LABEL

Manufacturer	iiyama
Model	ProLite S3820HSB-B1
Energy efficiency class	B
Visible screen diagonal	96.cm; 37.6"; (38" segment)
ON mode power consumption	48.9W
Annual energy consumption	71kWh/annum*
Power in Standby	0.5W stand by
Resolution	1920 x 540

*This is information under Regulation (EU) No 1062/2010.\*Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.*

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED