


### Full HD sadržaj

Ekрани modela serije 20 odlikuju rezolucije ekrana koje su 1/3 (28") i 1/2 (38") standardne Full HD rezolucije (1920x1080).

Sadržaj za ove modele treba biti kreiran u Full HD rezoluciji, a deo sadržaja koji treba biti prikazan u prvih 360 piksela za S2820HSB-B1 i u prvih 540 piksela za S3820HSB-B1.



### 24/7

24/7 displeji dizajnirani su za kontinuirani rad.

## 01 KARAKTERISTIKE EKRANA

Dijagonala	38", 96.5cm
Panel	MVA LED, matte finish
Osnovna rezolucija	1920 x 540 @60Hz (1.0 megapixel)
Osnovna rezolucija	60Hz
Format ekrana	16:4.5
Osvetljenje	1000 cd/m <sup>2</sup>
Statički kontrast	4000:1
Vreme odziva (GTG)	8ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	16.7miliona 8bit
Horizontalna sinhronizacija	30 - 83KHz
Vidljiva površina Š x V	919.3 x 258.5mm, 36.2 x 10.2"
Širina okvira (stranice, vrh, dno)	19.1mm, 16.4mm, 25mm
Razmak piksela	0.1596 x 0.4788mm
Boja okvra	crna, mat

## 02 KONEKTORI / KONTROLE

Ulaz analognog signala	VGA x1
Ulaz digitalnog signala	DVI x1 HDMI x1
Audio ulaz	Mini konektor x1
Kontrolni ulaz	RS-232c x1
Audio izlaz	Zvučnici 2 x 5W
Monitor kontrolni izlaz	RS-232c x1

## 03 KARAKTERISTIKE

Dodatno	Sunlight readable, portrait orientation left and right, handles
Maksimalno neprekidno radno vreme	24/7
Kućište (okvir)	metal
Senzor osvetljenosti	da
HDR	yes (HDMI)

## 04 OPŠTE

OSD jezici	EN
Kontrolni tasteri	Power, Increase / Input Select, Menu / Enter, Decrease / Brightness
Korisničke kontrole	brightness (OSD brightness, ambient light sensor with OSD offset, brightness, contrast, exit), signal select, sound (volume, mute, exit), color (color adjustment, sRGB, color temp, exit), image (auto adjustment, clock, phase, H. position, V. position, exit), tools (OSD control, reset, sharpness, exit), exit.
Plug&Play	DDC2B, Mac OSX

## 05 MEHANIČKI

Orijentacija	pejzaž, portret
Dizajniran bez ventilatora	da

VESA montiranje	400 x 100mm
Opseg radne temperature	0°C - 50°C
Temperatura skladištenja	- 20°C - 60°C
MTBF	100.000 sati

## 06 UKLUČENI DODACI

Kablovi	Strujni kabl, HDMI (1.8m), RS-232c
Upustva	kratko uputstvo, bezbednosni vodič
Ostalo	light sensor cable

## 07 UPRAVLJANJE NAPAJANJEM


Napajanje	eksterna
Potrošnja energije	% 1W tipično, 1.5W stand by, 1.5W iskljucen

## 08 ODRŽIVOST

Propisi	CB, CE, RoHS podrška, ErP, WEEE, CU, REACH
REACH SVHC	iznad 0.1%: Olova

## 09 DIMENZIJE / TEŽINA

Dimenzije proizvoda Š x V x D	962.6 x 304.9 x 54.2mm
Težina (bez kutije)	8.8kg
EAN kod	4948570116881

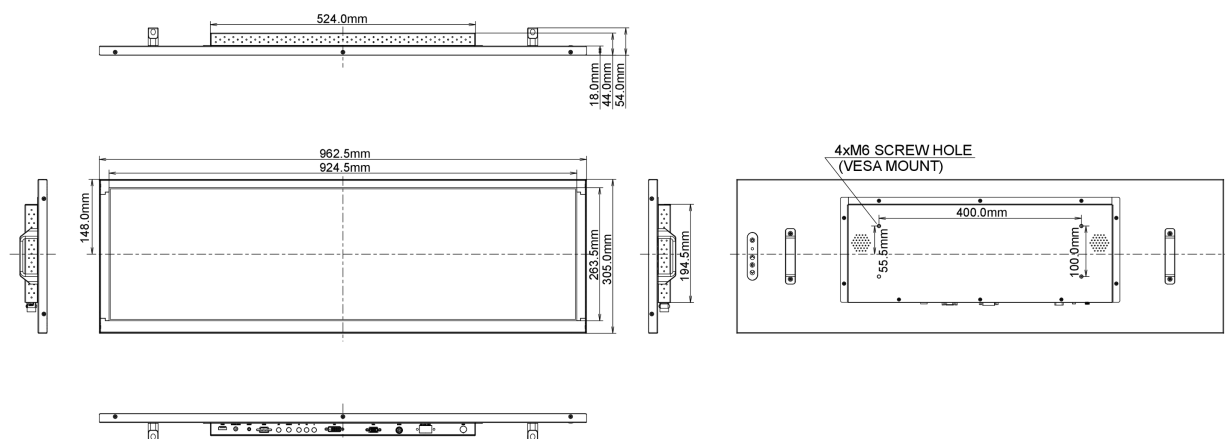

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IYAMA CORPORATION. ALL RIGHTS RESERVED