



32" VA panel with 4K resolution

The ProLite XB3288UHSU-B1 is a 32" 4K monitor capable of displaying 4 times more information than a Full HD screen. It will hence suit a massive range of applications requiring an above average viewable area, like desktop publishing, CAD/CAM drawing, data virtualization, photographic and web design. The VA panel technology offers exceptional colour performance, high contrast and wide viewing angles. HDMI, DisplayPort and a headphone socket ensure compatibility across various devices and media platforms. The height adjustable stand ensures you can easily adjust the screen position to your preferences.



4K

UHD resolution (3840x2160), better known as 4K, offers a gigantic viewable area with 4 times more information and work space than a Full HD screen. Due to the high DPI (dots per inch), it displays an incredibly sharp and crisp image.



VA matrix

VA panel technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.

01 DISPLAY CHARACTERISTICS

| | |
|---------------------|---|
| Diagonal | 31.5", 80cm |
| Panel | VA, matte finish |
| Native resolution | 3840 x 2160 @60Hz (8.3 megapixel 4K UHD) |
| Aspect ratio | 16:9 |
| Brightness | 300 cd/m ² typical |
| Static contrast | 3000:1 typical |
| Advanced contrast | 80M:1 |
| Response time | 3ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 1.07B 10bit (NTSC: 95%) |
| Horizontal Sync | 30 - 135KHz |
| Vertical Sync | 55 - 75Hz |
| Viewable area W x H | 698.4 x 392.9mm, 27.5 x 15.5" |
| Pixel pitch | 0.181mm |
| Colour | matte, black |

02 INTERFACES / CONNECTORS / CONTROLS

| | |
|---------------------|---|
| Signal input | HDMI x2 (v.2.0) DisplayPort x1 (v.1.2) |
| USB HUB | x2 (v.3.0 (x1 charger)) |
| HDCP | yes |
| Headphone connector | yes |

03 FEATURES

| | |
|--------------------|---|
| Blue light reducer | yes |
| Flicker free | yes |
| FreeSync support | @38~60Hz |
| HDR | yes |
| OSD languages | EN, DE, FR, IT, RU, JP, CZ, NL, PL |
| Control buttons | power/Menu, Scroll up/Input select, Scroll down, Left/ECO mode, Right/Volume |
| User controls | picture (picture format, brightness, contrast, black tuner, sharpness, OD, ACR, ECO mode, X-Res Technology), colour (warm, normal, cool, user colour, i-Style colour, blue light reducer), PiP/PbP (mode, sub win input, PiP size, PiP position, swap), input select, audio (volume, mute, audio input), language , OSD settings (OSD H. position, OSD V. position, OSD background, OSD time out), setup menu (DP format, HDMI RGB range, HDR, FreeSync, opening logo, LED, auto pow. off, memory recall, information) |
| Speakers | 2 x 3W |
| Convenience | Kensington-lock™ prepared, DDC/CI, Mac OSX |

04 MECHANICAL

| | |
|------------------------------|--------------------------|
| Display position adjustments | height, swivel, tilt |
| Height adjustment | 130mm |
| Swivel stand | 90°; 45° left; 45° right |
| Tilt angle | 22° up; 3° down |
| VESA mounting | 100 x 100mm |

| | |
|-----------------------------|---------------|
| Operation temperature range | 5°C - 35°C |
| Storage temperature range | - 20°C - 60°C |

05 ACCESSORIES INCLUDED

| | |
|--------|---------------------------------|
| Cables | power, USB, HDMI, DP |
| Other | quick start guide, safety guide |

06 POWER MANAGEMENT


| | |
|-------------------|---|
| Power supply unit | internal |
| Power supply | AC 100 - 240V, 50/60Hz |
| Power usage | 44W typical, 0.5W stand by, 0.5W off mode |

07 SUSTAINABILITY

| | |
|-------------------------|---|
| Regulations | CE, TÜV-Bauart, VCCI-B, PSE, Energy Star , CU |
| Energy efficiency class | B |
| Other | REACH SVHC above 0.1%: Lead |

08 DIMENSIONS / WEIGHT

| | |
|------------------------------|-----------------------------|
| Product dimensions W x H x D | 730 x 458.5 (578.5) x 230mm |
| Weight (without box) | 8.9kg |
| EAN code | 4948570116966 |

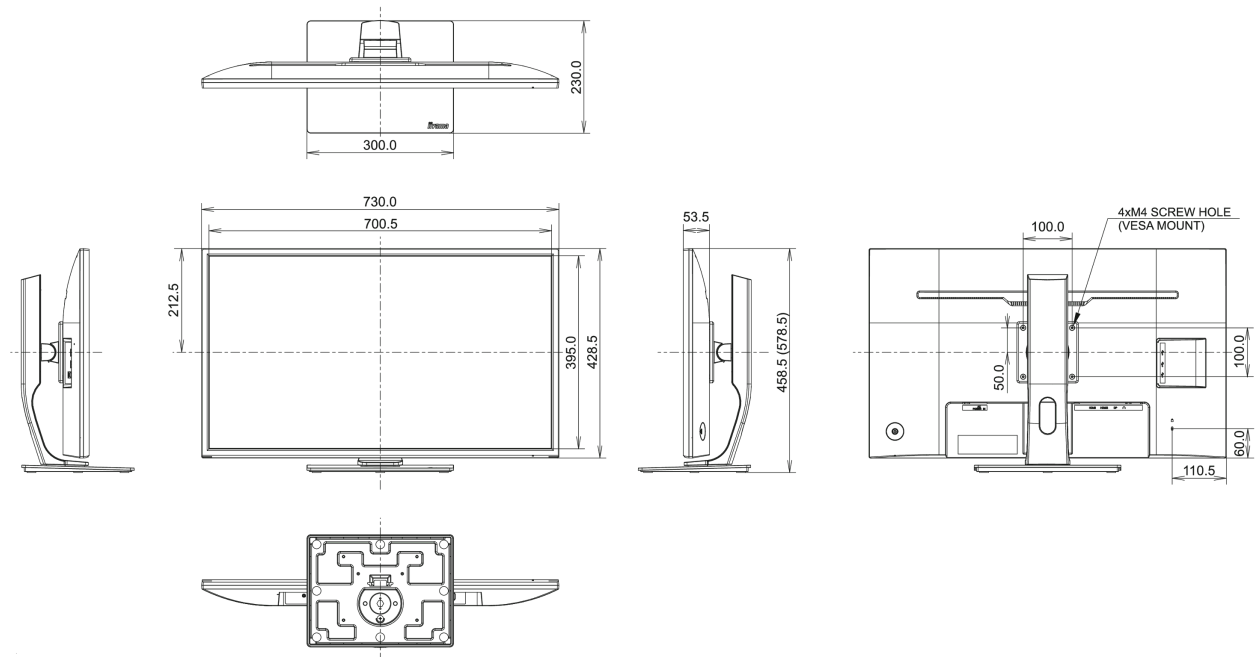

09 EU ENERGY EFFICIENCY LABEL

| | |
|---------------------------|----------------------------|
| Manufacturer | iiyama |
| Energy efficiency class | B |
| Visible screen diagonal | 80cm; 31.5"; (32" segment) |
| ON mode power consumption | 44W |
| Annual energy consumption | 65kWh/annum* |
| Power in OFF Mode | 0.5W off mode |

*This is information under Regulation (EU) No 1062/2010.*Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.*

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED