

65’’ Interaktivni 4K UHD LCD dodirni ekran sa integrisanim softverom za beleške

Podelite svoju viziju sa ProLite TE6504MIS-B1AG; savršenim rešenjem za obrazovanje i korporativnu upotrebu. 65" PureTouch-IR dodirni ekran sa 20 tačaka sa iiWare 9.0 (Android OS) koji sadrži program za beleške, web browser, menadžer datoteka, cloude diskove, WPS office i ScreenSharePro. Dolazi sa olovkama sa dvostrukim dodirom, koje korisnicima omogućavaju lagano beleženje u 4K rezoluciji na datotekama i sadržajima na ekranu, koji se mogu sačuvati direktno na USB uređaj, internu memoriju od 32GB ili na povezani uređaj u cloude-u. Ekran podržava ponavljanje prezentacija, video zapisa visoke rezolucije i gotovo bilo koju drugu vrstu sadržaja.

Visoko kvalitetni komercijalni IPS LCD ekran sa 4K UHD rezolucijom (3840x2160), 400cd/m^2 i kontrastnim odnosom od 1200:1, pruža živopisne, detaljne i visokokvalitetne slike bilo gde, u učionici ili sobi za sastanke. Premaz protiv odsjaja drastično smanjuje ambijentalnu refleksiju u okruženjima visoke osvetljenosti, a da ne ugrozi oštrinu i jasnoću slike. Ekran ima 24/7 non-stop vreme rada i opremljen je metalnim okvirom, kaljenim staklom debljine 3mm, kako bi se osigurala dugotrajna izdržljivost u okruženjima česte upotrebe, poput učionica ili sala za sastanke.

Delite, strimujte i uređujte sadržaj sa bilo kojeg uređaja direktno na ekranu i transformišite sastanke ili predavanja svog tima u laku, brzu i nesmetanu interaktivnu sesiju sa uključenim WiFi modulom (OWM002), aplikacijom ScreenSharePro i EShare.

PureTouch-IR

PureTouch-IR kompanije iiyama pruža tačnost dodira od 1 mm za najglatkiju i najbržu belešku.

iiWare

iiWare 9.0 sadrži Notes, pretraživač, Cloud Drive i opciju za učitavanje relevantnih aplikacija koje su vam potrebne za vašu organizaciju.

01 KARAKTERISTIKE EKRANA

Dizajn	Tanki okvir
Dijagonala	65", 163.9cm
Panel	IPS, AG presvučeno staklo, bez vazdupnih džepova
Osnovna rezolucija	3840 x 2160 (8.3 megapixel 4K UHD)
Format ekrana	16:9
Osvetljenje	400 cd/m²
Propusnost svetla	88%
Statički kontrast	1200:1
Dinamički kontrast	3500:1
Vreme odziva (GTG)	8ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	1.07B (8bit+FRC)
Horizontalna sinhronizacija	30 - 80KHz
Vidljiva površina Š x V	1429 x 804mm, 56.3 x 31.7"
Širina okvira (stranice, vrh, dno)	14mm, 14mm, 43mm
Razmak piksela	0.372mm
Boja okvra	crna, mat

02 TOUCH

Touch tehnologija	PureTouch-IR
Tačke dodira	20 (HID, samo uz podržani OS)
Preciznost dodira	+- 1mm
Način dodira	olovka, prst, rukavica
Interfejs dodira	USB
Podržani operativni sistemi	Svi iiyama monitori su Plug & Play kompatibilni sa Windows Linux operativnim sistemima. Detalje o podržanom OS-u za modele osetljive na dodir potražite u odjeljku za preuzimanje u uputstvima za instalaciju drajvera.

03 KONEKTORI / KONTROLE

Ulaz analognog signala	VGA x1 (max. 1920x1080 @60Hz)
Ulaz digitalnog signala	HDMI x3 (v.2.0, max. 3840x2160 @60Hz, RGB444) USB-C x1 (3.1, 3840x2160 @60Hz - RGB444 - (65W charging, Touch)
Audio ulaz	Mini konektor x1
Kontrolni ulaz	RS-232c x1 (DSUB 9pin) RJ45 (LAN) x1 (LAN Control)
Digitalni izlaz signala	HDMI x1 (2.0, 3840x2160 @60Hz - RGB444/YUV444)
Audio izlaz	S/PDIF (Optički) x1 Mini konektor x1 Zvučnici 2 x 16W
HDCP	v.2.2
USB portovi	x5
RJ45 (LAN)	x2 (Automatsko prebacivanje na PC i Android, 1000 MB)

04 KARAKTERISTIKE

Integrisani softver	iiWare 9.0 (Android OS) koji sadrži Note, web pregledač, menadžer datoteka, cloude diskove, WPS office, ScreenSharePro i EShare za bežičnu vezu sa Windovs / iOS / Android uređajima
WiFi	da (WiFi Module OWM002 - Dual bandwidth: 2.4GHz/5GHz, Standard: IIEEE 802.11 a/b/g/n/ac, Bluetooth support: 2.1/3.0/4.2/5.0)
Hardver	Quad core A73 CPU, Mali G52 GPU, 4GB RAM, 32GB interna memorija
Dodatno	WiFi Modul (OWM002), Ambijentalni svetlosni senzor, OTA firmware update
Kiosk mod	da
Maksimalno neprekidno radno vreme	24/7
Reprodukcija medija	da
Debljina stakla	3mm
Tvrdoća stakla	7H
Kućište (okvir)	metal
Zaključavanje OSD tastera	da

05 OPŠTE

OSD jezici	EN, DE, FR, ES, IT, RU, CZ, NL, PL
Kontrolni tasteri	Napajanje, indikator napajanja, daljinski senzor, senzor svetlosti, USB konektor (3.0)
Plug&Play	DDC2B
Garancija	5 godina (za detalje i zemlje koje ispunjavaju uslove potražite odeljak Garancija na našoj web stranici)

06 MEHANIČKI

Orijentacija	pejzaž
Dizajniran bez ventilatora	da
VESA montiranje	600 x 400mm
Opseg radne temperature	0°C - 40°C
Temperatura skladištenja	- 20°C - 60°C
MTBF - Prosecno vreme izmedju kvarova	50.000 sati (izuzimajući pozadinsko osvetljenje)

07 UKLJUČENI DODACI

Kablovi	Strujni kabl, HDMI, USB za dodirne ekrane
Olovka za dodir	x4 (Saveti za dvostruke funkcije)
Upustva	kratko uputstvo, bezbednosni vodič
Ostalo	WiFi Module (OWM002), Mounting bracket for NUC, Mounting bracket for webcam
Daljinski upravljač	da (baterije uključene)

08 UPRAVLJANJE NAPAJANJEM

Napajanje	interna
Potrošnja energije	% 1W tipično, 0.5W stand by, 0.5W iskljucen

09 ODRŽIVOST

Propisi	CB, CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, REACH (RoHS, PFOS, PFC)
REACH SVHC	iznad 0.1%: Olova

10 DIMENZIJE / TEŽINA

Dimenzije proizvoda Š x V x D	1489 x 897 x 86mm
Dimenzije kutije Š x V x D	1697 x 220 x 1005mm
Težina (bez kutije)	38kg
Težina (sa kutijom)	50kg
EAN kod	4948570118434

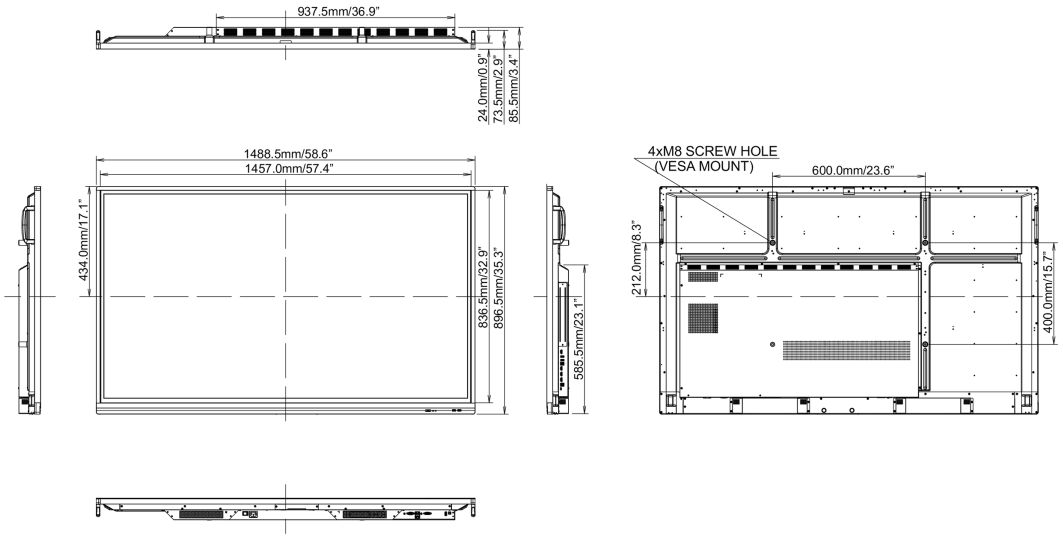

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED