G SDM 4K UHD RS232C Media Player Slim line REMOTE HDMI VESA

86" profesionalni ekran za digitalno oglašavanje sa 4K UHD rezolucijom

Uživajte u svetlijim natpisima uz ProLite 42 seriju. Tankog okvira sa osvetljenjem od 500 cd / m², 4K UHD sa radnim vremenom 18/7 i izborom aplikacija u pejzažnoj i portretnoj orijentaciji. Zahvaljujući ugrađenom Android OS, ekran možete lako podesiti tako da instalirate aplikacije direktno na njega, što ga čini savršenim izborom za digitalno oglašavanje i komunikaciju u trgovini.

Signal FailOver

FailOver je funkcija koja automatski otkriva izvore ulaza. Kada nema signala na podrazumevanom ulazu, automatski će se prebaciti na sledeći dostupni ulaz. FailOver omogućava klijentima da daju prioritet brojnim unosima (uključujući pretraživač, Media Player i Custom) i osigurava da se vaš sadržaj uvek aktivno prikazuje, obezbeđujući aktivan sadržaj u svakom trenutku.

Android OS

Zahvaljujući Android operativnom sistemu, ekran možete lako prilagoditi svojim potrebama instaliranjem aplikacija direktno na njega.

01 KARAKTERISTIKE EKRANA

Dizajn	Tanki okvir
Dijagonala	85.6", 217cm
Panel	IPS, haze 2%
Osnovna rezolucija	3840 x 2160 @60Hz (8.3 MegaPixels 4K UHD)
Osnovna rezolucija	60Hz
Format ekrana	16:9
Osvetljenje	500 cd/m²
Statički kontrast	1200:1
Vreme odziva (GTG)	8ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	1.07G (8 Bits+FRC)
Horizontalna sinhronizacija	30 - 80KHz
Vidljiva površina Š x V	1895 x 1066.9mm, 74.6 x 42"
Širina okvira (stranice, vrh, dno)	15.5mm, 15.5mm, 15.5mm
Razmak piksela	0.494mm
Boja okvra	crna, mat

02 KONEKTORI / KONTROLE

Ulaz analognog signala	VGA x1 (DVI-I: VGA+DVI)
Ulaz digitalnog signala	DVI x1 (max. 1920x1080 @60Hz) HDMI x3 (v.2.0, max. 3840x2160 @60Hz) DisplayPort x1 (v.1.4, max. 3840x2160 @60Hz)
Audio ulaz	Mini konektor x1 (3.5mm)
Kontrolni ulaz	RS-232c x1 (2.5mm sub-mini jack) RJ45 (LAN) x1 IR x1 (3.5mm stereo mini)
Digitalni izlaz signala	DisplayPort x1 (max. 3840x2160 @60Hz, MST-out Daisy Chain)
Audio izlaz	Mini konektor x1 (3.5mm) Zvučnici 2 x 10W
Monitor kontrolni izlaz	RS-232c x1 IC loop x1 (3.5mm stereo mini)
HDCP	v.2.2
USB portovi	x2 (v.2.0)

03 KARAKTERISTIKE

Integrisani softver	Android OS 8.0 (Full HD), EShare, iiSignage
WiFi	opciono
Hardver	CPU: MTK96+MSB6000, CA73*2+A53*2, Memory: 3GB DDR4, Storage: 32GB eMMC
Dodatno	Intel® SDM-L, micro SD card slot, OTA firmware update
Maksimalno neprekidno radno vreme	18/7
Protiv zadržavanja slike	da
Reprodukcija medija	da
Kućište (okvir)	metal

04 OPŠTE

OSD jezici	EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL
Kontrolni tasteri	Uključivanje, Bez zvuka, Ulaz, Plus, Minus, Gore, Dole, meni
Korisničke kontrole	slika (osvetljenost, kontrast, oštrina, nivo crne, nijansa, boja, smanjenje šuma, izbor gama, temperatura boje, kontrola boje, pametno napajanje, prekomerno skeniranje, resetovanje slike), ekran (položaj H., položaj V., sat, faza sata , režim zumiranja, prilagođeno zumiranje, automatsko podešavanje, resetovanje ekrana), zvuk (balans, visoki tonovi, bas, jačina zvuka, audio izlaz, maksimalna jačina zvuka, minimalna jačina zvuka, isključenje zvuka, izvor zvuka, resetovanje zvuka, sinhronizacija audio izlaza, podešavanje zvučnika), konfiguracija 1 (stanje uključivanja, spremanje ploče, usmjeravanje RS232, pokretanje pri izvozu, VOL, konfiguracija 1 resetovanje, vraćanje na fabričke postavke), konfiguracija 2 (isključivanje OSD-a, H-položaj OSD-a, V-položaj OSD-a, rotacija sistema, OSD sa informacijama, logotip, ID monitora, status grejanja, informacije o monitoru, DP verzija, verzija HDMI, resetovanje konfiguracije 2), Napredna opcija (IC kontrola, LED svetlo za napajanje, kontrola tastature, popločavanje, tajmer za isključivanje, raspored, HDMI sa isključivanjem jedne žice, Prekid , jezik, transparentnost menija na ekranu, ušteda energije, postavke SDM -a, napredno resetovanje opcija), Android postavke (ethernet, signalizacija ekrana, sistemski alati, ažuriranja sistema, aplikacije, ekran, bezbednost, datum i vreme, opcije za programere,)
Plug&Play	DDC2B

05 MEHANIČKI

Orijentacija	pejzaž, portret
Dizajniran bez ventilatora	da
VESA montiranje	600 x 400mm
Opseg radne temperature	0°C - 40°C
Temperatura skladištenja	- 20°C - 60°C
MTBF - Prosecno vreme izmedju kvarova	50.000 sati (izuzimajući pozadinsko osvetljenje)

06 UKLJUČENI DODACI

Kablovi	Strujni kabl, HDMI, RS-232c
Upustva	kratko uputstvo, bezbednosni vodič
Ostalo	Nalepnice za rupe od vijaka
Daljinski upravljač	da (baterije uključene)

07 UPRAVLJANJE NAPAJANJEM

Napajanje	interna
Potrošnja energije	% 1W tipično, 0.5W stand by, 0.5W iskljucen

08 ODRŽIVOST

Propisi	CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, REACH, UKCA
Klasa energetske efikasnosti (Regulation (EU) 2017/1369)	G

09 DIMENZIJE / TEŽINA

Dimenzije proizvoda Š x V x D	1929 x 1100 x 95.5mm
Dimenzije kutije Š x V x D	2224 x 1427 x 373mm
Težina (bez kutije)	49.5kg
Težina (sa kutijom)	66.1kg
EAN kod	4948570118625

IIYAMA LE8642UHS

Version: 3.1
Release Date: 2023/03/15

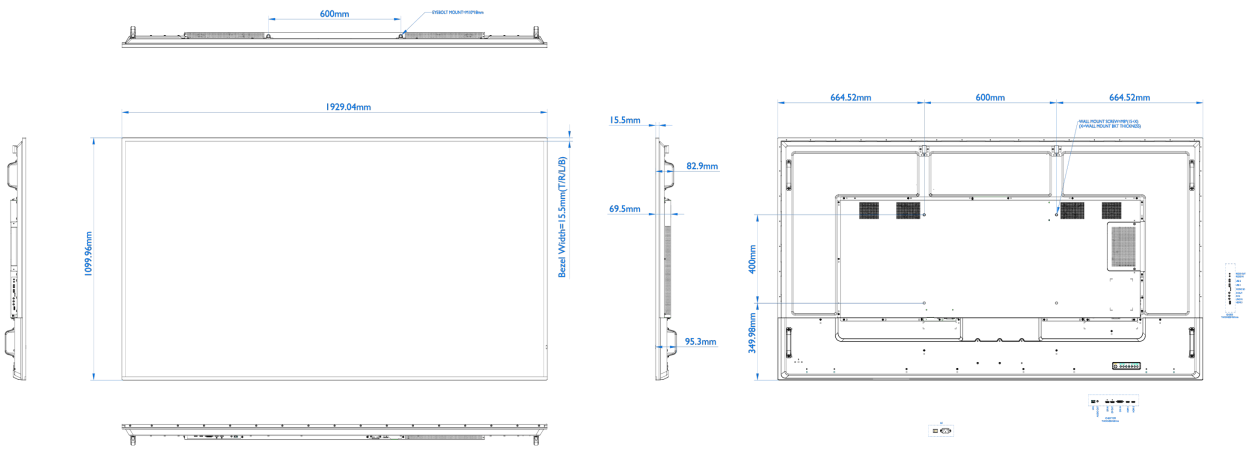

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED