



### 27" WQHD IPS panel with an ergonomic stand and USB-C Connectivity

Supplying USB Type-C connectivity, the XUB2792QSC allows you to simplify your workspace by using a single cable to connect, power (65W power delivery) and charge the notebook from the monitor, providing the foundation for hybrid office spaces. The IPS panel and WQHD (2560x1440) resolution offer noticeably sharper images, excellent colour performance, wide viewing angles, making this ideal for productivity solutions, demanding office applications as well as CAD. Equipped with speakers, headphone socket, a blue light reducer function to reduce eye fatigue and an ergonomic height adjustable stand for optimal user comfort.

TCO conformity and ultra-low power consumption make this XUB2792QSC an ideal display for the modern environmentally conscious, yet productive workplace.



#### IPS Technology

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.



#### QHD

With true QHD 2560 x 1440p resolution your monitor is ready to display high definition images. This means you can accommodate more information on your screen, i.e. over 76% more in comparison to a 1920 x 1080 monitor.

## 01 DISPLAY CHARACTERISTICS

<b>Design</b>	3-side borderless
<b>Diagonal</b>	27", 68.5cm
<b>Panel</b>	IPS Panel Technology LED, matte finish
<b>Native resolution</b>	2560 x 1440 @75Hz (DisplayPort&HDMI, 3.7megapixel WQHD)
<b>Aspect ratio</b>	16:9
<b>Panel brightness</b>	350 cd/m <sup>2</sup>
<b>Static contrast</b>	1000:1
<b>Advanced contrast</b>	80M:1
<b>Response time (GTG)</b>	4ms
<b>Viewing zone</b>	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
<b>Colour support</b>	16.7mIn (sRGB: 99%; NTSC: 72%)
<b>Horizontal Sync</b>	30 - 120kHz
<b>Viewable area W x H</b>	596.7 x 335.7mm, 23.5 x 13.2"
<b>Pixel pitch</b>	0.233mm
<b>Colour</b>	matte, black

## 02 INTERFACES / CONNECTORS / CONTROLS

<b>Signal input</b>	HDMI x1 DisplayPort x1 USB-C x1 ((Power delivery 65W))
<b>USB HUB</b>	x2 (v.3.0 (DC5V, 900mA))
<b>HDCP</b>	yes
<b>Headphone connector</b>	yes

## 03 FEATURES

<b>Blue light reducer</b>	yes
<b>Flicker free</b>	yes
<b>Extra</b>	i-style Colour
<b>OSD languages</b>	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL
<b>Control buttons</b>	Power, Menu/ Select, Up/ Volume, Down/ ECO, Exit, Input
<b>User controls</b>	picture adjust (brightness, contrast, Eco, blue light reducer, ACR, OD), colour settings (colour temp., user preset, i-Style colour), OSD (OSD H. position, OSD V. position, OSD rotate, OSD time), language, recall, miscellaneous (sharp and soft, video mode adjust, opening logo, MST, USB, RGB Range, information), input select, audio settings (volume, mute)
<b>Speakers</b>	2 x 2W
<b>Convenience</b>	Kensington-lock™ prepared, DDC2B, Mac OSX

## 04 MECHANICAL

<b>Display position adjustments</b>	height, swivel, tilt, pivot (rotation both sides)
<b>Height adjustment</b>	130mm
<b>Rotation (PIVOT function)</b>	90°
<b>Swivel stand</b>	90°; 45° left; 45° right
<b>Tilt angle</b>	22° up; 5° down
<b>VESA mounting</b>	100 x 100mm
<b>Cable management system</b>	yes

## 05 ACCESSORIES INCLUDED

Cables	power, HDMI, DP, USB-C
Other	quick start guide, safety guide

## 06 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	21W typical, 0.5W stand by, 0.5W off mode

## 07 SUSTAINABILITY

Regulations	TCO Certified, CE, TÜV-GS, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA
Energy efficiency class (Regulation (EU) 2017/1369)	F
REACH SVHC	above 0.1%: Lead

## 08 DIMENSIONS / WEIGHT

Product dimensions W x H x D	613.5 x 412.5(542.5) x 230mm
Box dimensions W x H x D	692 x 198 x 490mm
Weight (without box)	7.5kg
Weight (with box)	9.3kg
EAN code	4948570117932

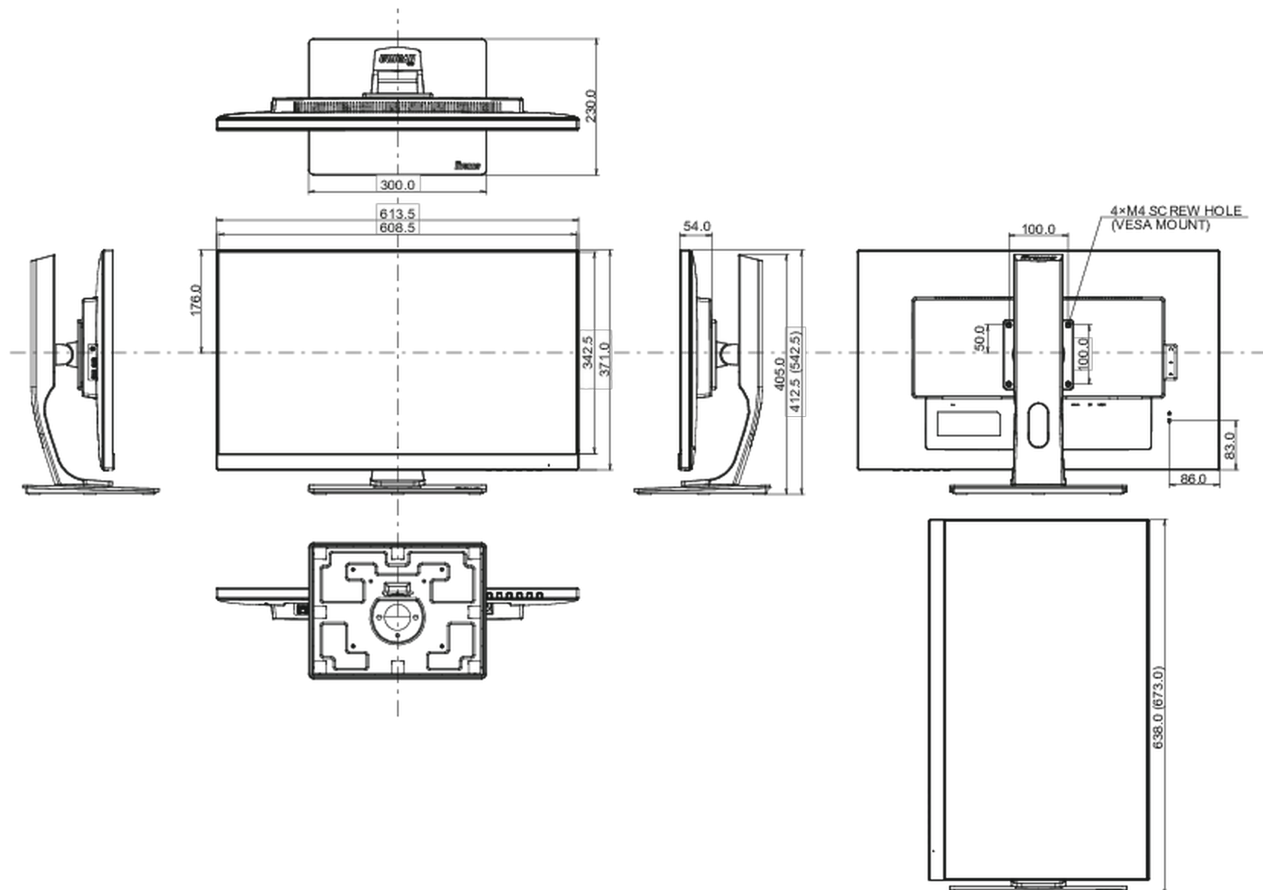

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IYAMA CORPORATION. ALL RIGHTS RESERVED