

IFP INTERACTIVE DISPLAYS

INFORMACIJE

75" OS-Free Professional Touch Display for Maximum Security and Full IT Control



The ProLite TN7505A-B1AG is a large-format professional touch display, without an operating system, designed for environments where security, reliability and control are non-negotiable. Despite its minimalist structure, the TN7505A is exceptionally easy to use: simply connect your source and it works. The responsive multi-touch panel, 4K UHD resolution and high brightness deliver a precise and professional experience for collaboration, presentations and interactive applications. Built-in annotation allows users to write directly on the screen with a pen, marking up presentations or any on-screen content in real time for clear and effective communication. The TN7505A is the ideal choice for banks, courts, defence organisations, IT departments, universities and other high-security or compliance-driven environments where simplicity, transparency and trust are essential.



OS-Free

- No operating system, where security, reliability and control matter.



Maximum security

With no operating system to manage or update, the display offers a stable, secure solution ideal for environments where data protection and reliability are critical.



Plug & Play simplicity

Designed for ultimate ease of use: plug in your laptop and share your content instantly. No operating system, no complicated configuration.



Estetika koja oplemenjuje svaki prostor

Moderan, minimalistički i osmišljen da unapredi svaki ambijent – ovaj dizajn se savršeno uklapa u učionice i konferencijske sale. Nije samo ekran – to je izjava. Čiste linije, vrhunska završna obrada i prisustvo koje podstiče fokus i profesionalnost, bez preuzimanja pažnje.

01 KARAKTERISTIKE EKRANA

Dijagonala	74.52", 189.273cm
Panel	IPS, AG coating & Anti-Bacteria coating, haze 25%
Osnovna rezolucija	3840 x 2160 (8.3 megapixel 4K UHD)
Format ekrana	16:9
Osvetljenje	500 cd/m ²
Statički kontrast	1200:1
Vreme odziva (GTG)	5ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Horizontalna sinhronizacija	30 - 135KHz
Vidljiva površina Š x V	1650.0 x 928.0mm, 65.0 x 36.5"

02 TOUCH

Touch tehnologija	DeepContrast-IR+
Preciznost dodira	+/- 1mm
Interfejs dodira	USB
Podržani operativni sistemi	Svi iiyama monitori su Plug & Play kompatibilni sa Windows Linux operativnim sistemima. Detalje o podržanom OS-u za modele osetljive na dodir potražite u odjeljku za preuzimanje u uputstvima za instalaciju drajvera.
Odbijanje dlana	da

03 KONEKTORI / KONTROLE

Ulaz analognog signala	VGA x1 (FHD)
Ulaz digitalnog signala	HDMI x2 (CEC/ARC) DisplayPort x1 USB-C x1 (Power Delivery 65W, DP-Alt, Data, Touch)
Audio ulaz	Mini konektor x3.5 mm
Kontrolni ulaz	RS-232c x1 RJ45 (LAN) x2
Audio izlaz	Mini konektor x1 Zvučnici 2 x 20W (Subwoofer 1x 20W)
Monitor kontrolni izlaz	OPS Slot x1 (Intel OPS80 standard)
USB portovi	x1 2.0 (2x 3.2 (USB-B up for touch HDMI1/DP/VGA))
RS-232c	x1
RJ45 (LAN)	x2

04 KARAKTERISTIKE

Integrirani softver	No OS Operating System
---------------------	------------------------

PiP (slika u slici)	da
----------------------------	----

PbP (slika pored slike) da

05 OPŠTE

OSD jezici EN, DE, FR, ES, IT, RU, JP, NL

06 MEHANIČKI

Dizajniran bez ventilatora da

VESA montiranje	800 x 400mm
------------------------	-------------

Opseg radne temperature 0°C - 40°C

Temperatura skladištenja	- 20°C - 60°C
---------------------------------	---------------

07 UKLJUČENI DODACI

Kablovi RS-232c

Daljinski upravljač	da (baterije uključene)
----------------------------	-------------------------

08 UPRAVLJANJE NAPAJANJEM

Napajanje interna

Potrošnja energije	% 1W tipično, 0.5W stand by, 0.3W isključen
---------------------------	---

09 ODRŽIVOST

Propisi CB, CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, REACH, UKCA

Klasa energetske efikasnosti (Regulation (EU) 2017/1369)	G
---	---


REACH SVHC iznad 0.1%: Olova

10 DIMENZIJE / TEŽINA

Dimenzije proizvoda Š x V x D 1710.2 x 1036.3 x 120.4mm

Težina (bez kutije)	54.5kg
----------------------------	--------

EAN kod 4948570127078

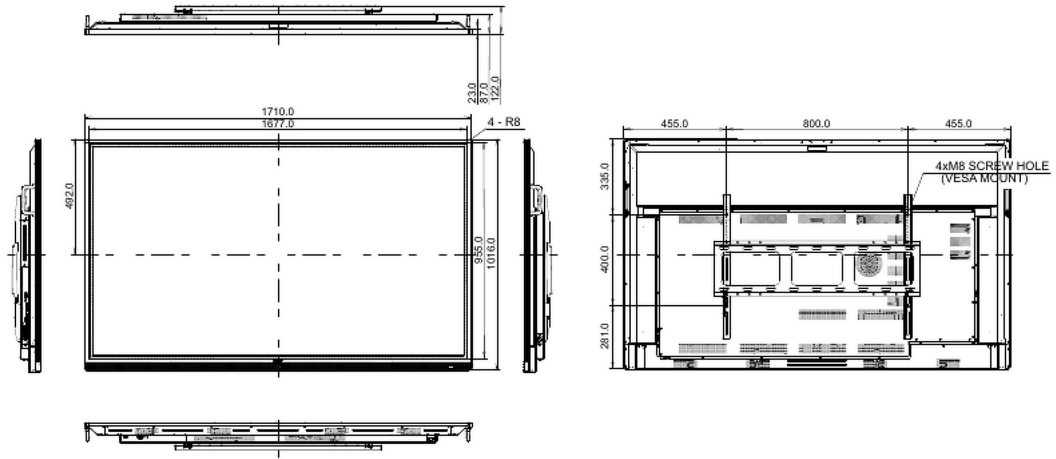



All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © IIYAMA CORPORATION. ALL RIGHTS RESERVED