


IFP INTERACTIVE DISPLAYS**BİLGİLER****75" OS-Free Professional Touch Display for Maximum Security and Full IT Control**

The ProLite TN7505A-B1AG is a large-format professional touch display, without an operating system, designed for environments where security, reliability and control are non-negotiable. Despite its minimalist structure, the TN7505A is exceptionally easy to use: simply connect your source and it works. The responsive multi-touch panel, 4K UHD resolution and high brightness deliver a precise and professional experience for collaboration, presentations and interactive applications. Built-in annotation allows users to write directly on the screen with a pen, marking up presentations or any on-screen content in real time for clear and effective communication. The TN7505A is the ideal choice for banks, courts, defence organisations, IT departments, universities and other high-security or compliance-driven environments where simplicity, transparency and trust are essential.

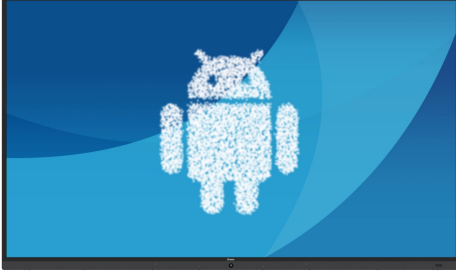

OS-Free

- No operating system, where security, reliability and control matter.



Maximum security

With no operating system to manage or update, the display offers a stable, secure solution ideal for environments where data protection and reliability are critical.



Plug & Play simplicity

Designed for ultimate ease of use: plug in your laptop and share your content instantly. No operating system, no complicated configuration.



Her Ortama Değer Katan Estetik

Modern, minimalist ve her ortama değer katmak için tasarlanmış – bu tasarım hem sınıflara hem de toplantı odalarına kusursuz şekilde uyum sağlar. Bu sadece bir ekran değil; aynı zamanda bir ifadedir. Temiz çizgiler, kaliteli bir son dokunuş ve dikkat çekmeden odaklanmayı ve profesyonelliği artıran bir duruş.

ÖZELLİKLER

01 EKRAN ÖZELLİKLERİ

Ekran Boyutu	74.52", 189.273cm
Diyagonal	189.273cm
Panel	IPS, AG coating & Anti-Bacteria coating, haze 25%
Çözünürlük	3840 x 2160 (8.3 megapixel 4K UHD)
En-Boy Oranı	16:9
Panel Parlaklığı	500 cd/m ²
Parlaklık	450 cd/m ² (typ.)
Statik Kontrast	1200:1
Tepki süresi (GTG)	5ms
Görüntüleme Alanı	yatay/dikey: 178°/178°, sağ/sol: 89°/89°, yukarı/aşağı: 89°/89°
Yatay Sync	30 - 135kHz
Görüntülenebilir alan G x Y	1650.0 x 928.0mm, 65.0 x 36.5"

02 DOKUNMATİK

Dokunmatik teknoloji	DeepContrast-IR+
Dokunma doğruluğu	+/- 1mm
Dokunmatik arayüz	USB
Desteklenen işletim sistemleri	Tüm iiyama monitörleri Tak ve Çalıştır özelliğine sahiptir ve Windows ve Linux ile uyumludur. Dokunmatik modeller için desteklenen işletim sistemiyle ilgili ayrıntılar için lütfen indirmeler bölümünde bulunan sürücü talimat dosyasına bakın.
Palm rejection	Evet

03 ARAYÜZLER / BAĞLANTILAR / KONTROLLER

Analog sinyal girişi	VGA x1 (FHD)
Dijital sinyal girişi	HDMI x2 (CEC/ARC) DisplayPort x1 USB-C x1 (Power Delivery 65W, DP-Alt, Data, Touch)
Ses girişi	Mini jack x3.5 mm
Monitör kontrol girişi	RS-232c x1 RJ45 (LAN) x2
Ses çıkışı	Mini jack x1 Hoparlör 2 x 20W (Subwoofer 1x 20W)
Monitor control output	OPS Slot x1 (Intel OPS80 standard)
USB Portları	x1 2.0 (2x 3.2 (USB-B up for touch HDMI1/DP/VGA))
RS-232c	x1
RJ45 (LAN)	x2

04 ÖZELLİKLER

Dahili OS	No OS Operating System
PiP	evet
PbP	evet

05 GENEL

OSD dilleri EN, DE, FR, ES, IT, RU, JP, NL

06 MEKANİK

Fansız tasarım	evet
VESA montajı	800 x 400mm
Çalışma sıcaklığı aralığı	0°C - 40°C
Depolama sıcaklığı aralığı	- 20°C - 60°C

07 PAKET İÇERİĞİNDEKİ AKSESUARLAR

Kablolar	RS-232c
Uzaktan kumanda	yes (batteries included)

08 GÜÇ YÖNETİMİ


Güç Kaynağı Ünitesi	internal
Güç Tüketimi	175W tipik, 0.5W stand by, 0.3W off mode

09 SÜRDÜRÜLEBİLİRLİK

Yönetmelikler	CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH, UKCA
Enerji verimliliği sınıfı (Yönetmelik (EU) 2017/1369)	G
REACH SVHC	above 0.1%: Lead

10 ÖLÇÜLER / AĞIRLIK

Ürün boyutları G x Y x D	1710.2 x 1036.3 x 120.4mm
Ağırlık (kutu hariç)	54.5kg
EAN kodu	4948570127078

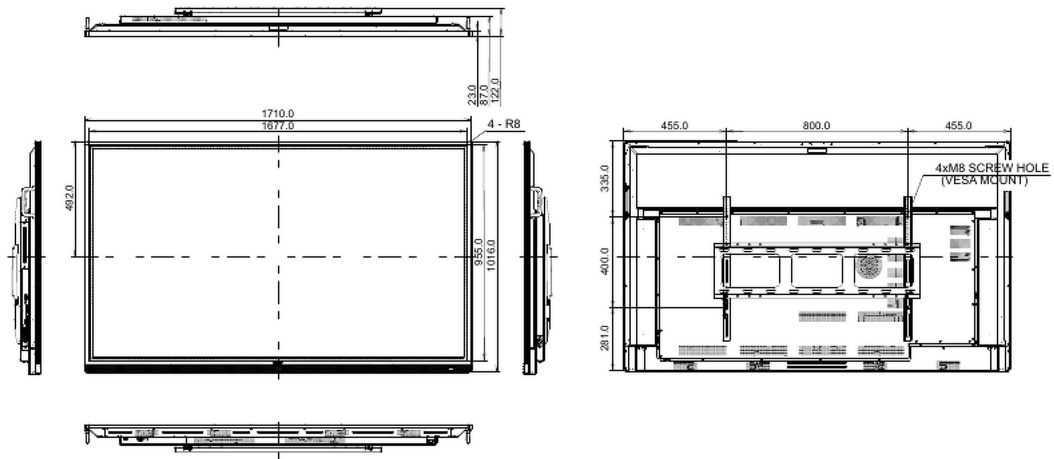



All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © IIYAMA CORPORATION. ALL RIGHTS RESERVED