

LFD - SIGNAGE DISPLAYS



INFORMACIJE



ProLite LH10552UWS-B1AG with extra-wide 105" 5K collaboration display


The ProLite LH10552UWS-B1AG delivers stunning 5K UltraWide resolution on a 105" IPS panel, ideal for hybrid meetings, control rooms and immersive presentations. With USB-C connectivity, 100W power delivery, Android OS and integrated speakers with subwoofer, it offers a complete all-in-one solution for modern workspaces.



Fleksibilna orijentacija

Mogućnost pozicioniranja ekrana u pejzažnoj ili portretnoj orijentaciji znači da možete maksimalno iskoristiti svaki prostor i svojoj publici približiti svoje poruke, reklame, video zapise i bezbednosne informacije.

Ultra-široki ekran 21:9

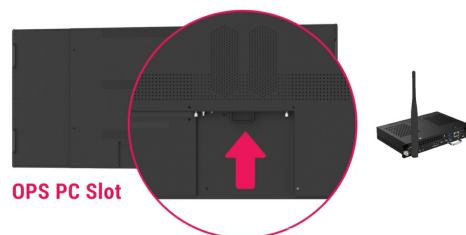

5K - 11 Mega Pikseli

Doživite zapanjujuće vizuelne slike sa 5KUW (5120x2160) rezolucijom, nudeći oštre i jasne slike za zaista impresivno iskustvo gledanja.

Samostalno rešenje

Otključajte svu bezbednost i fleksibilnost Windows IoT-a pomoću opcionog OPS Slot PC-a.

01 KARAKTERISTIKE EKRANA

Dijagonala	104.6", 265.68cm
Panel	IPS, AG presvučeno staklo, mat završna obrada, haze 25%
Osnovna rezolucija	5120 x 2160 @60Hz (5KUW)
Osnovna rezolucija	60Hz
Format ekrana	21:9
Osvetljenje	500 cd/m ²
Statički kontrast	1200:1
Dinamički kontrast	5000:1
Vreme odziva (GTG)	8ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	1.07G (8 Bits+FRC) (NTSC 85%)
Horizontalna sinhronizacija	30 - 135KHz
Vidljiva površina Š x V	2449.92 x 1033.56mm, 96.5 x 40.7"
Širina okvira (stranice, vrh, dno)	14.9mm, 14.9mm, 14.9mm
Razmak piksela	0.14355 x 0.14355mm

02 KONEKTORI / KONTROLE

Ulaz digitalnog signala	HDMI x1 (5120 x 2160 60Hz, HDMI 2/3/4 x3: 3840 x 2160 60Hz) DisplayPort x1 (5120 x 2160 60Hz) USB-C x1 (3840 x 2160 60Hz)
Audio ulaz	Mini konektor x1 (3.5mm)
Kontrolni ulaz	RS-232c x1 RJ45 (LAN) x2 (1000Mbps)
Digitalni izlaz signala	HDMI x1 (Max. resolution 3840 x 2160 @60Hz HDMI2,0 HDCP 1.4)
Audio izlaz	Mini konektor x1 (3.5mm) Zvučnici 2 x 20W (20W subwoofer)
Monitor kontrolni izlaz	OPS Slot x1 (65%(max) is plug in OPS)
USB portovi	x3 (2.0)
RJ45 (LAN)	x2 ((IN/OUT) 1000Mbps)

03 KARAKTERISTIKE

Integrirani softver	Android OS
WiFi	da (WiFi 6E + BT 5.2)
Hardver	SOC: RK3588 Octo-core A76x4 + A55x4, GPU Mali G640 MP4, RAM: 8GB, ROM: 128 GB
Dodatno	1x Intel OPS 80pin
Kiosk mod	da

Maksimalno neprekidno radno vreme	24/7
--	------

Kućište (okvir) metal

04 OPŠTE

OSD jezici EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL, CAT, FI, DA, ET, LV, LT, HU

Kontrolni tasteri	Power key (1key with On: LED Off: , Long push(power off (LED :Red) Turn off/on backlight(Short click) Standby modus (LED :Red Flashing fast)
--------------------------	--

Korisničke kontrole Wireless & Network(Ethernet, Wi-Fi, Hotspot, VPN, Share Network), Personal(Wallpaper), Input & Output(Sound Output Settings, Input Naming Settings, HDMI OUT Format, CEC), System(Date & Time, Language & Keyboard, Startup & Shutdown, Screen orientation, Pixel Shift, Storage, System Update, Advance Settings, Security, User Experience Improvement), About(Legal Information, Module Number, Android Version, Kernel Version, Build Number, Firmware Version, Serial Number)

Redukcija plavog svetla	da
--------------------------------	----

Bez treperenja da

Plug&Play	DDC2B
----------------------	-------

05 MEHANIČKI

Orijentacija pejzaž, portret

VESA montiranje	1000 x 600 m8 x 25
------------------------	--------------------

Opseg radne temperature 0°C - 40°C

Temperatura skladištenja	- 20°C - 60°C
---------------------------------	---------------

06 UKLJUČENI DODACI

Kablovi Strujni kabl (3m), HDMI (3m), DP (3m), RS-232c (3m)

Upustva	kratko uputstvo, bezbednosni vodič
----------------	------------------------------------

Ostalo Guides, cable management cover, remote control, cable ties (5 units), webcam bracket, wall mount bracket, wall mount bracket set.

Daljinski upravljač	da (baterije uključene)
----------------------------	-------------------------

07 UPRAVLJANJE NAPAJANJEM

Napajanje interna

Potrošnja energije	% 1W tipično, 0.5W stand by, 0.3W isključen
---------------------------	---

08 ODRŽIVOST

Propisi CB, CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, REACH, UKCA

Klasa energetske efikasnosti (Regulation (EU) 2017/1369)	G
---	---


REACH SVHC iznad 0.1%: Olova

09 DIMENZIJE / TEŽINA

Dimenzije proizvoda Š x V x D	2489.9 x 1081.4 x 77mm
Dimenzije kutije Š x V x D	2668 x 1233 x 280mm
Zapremina palete	32pcs
Dimenzije palete Š x V x D	2380 x 1140 x 129mm
Težina (bez kutije)	53.5kg
Težina (sa kutijom)	79.5kg
EAN kod	4948570128020

10 OZNAKA ENERGETSKE EFIKASNOSTI

Proizvodjač	iiyama
Vidljiva dijagonala ekrana	266cm; 105"; (%3" segment)
Potrošnja energije u režimu ON	248W
Potrošnja u OFF modu	0.3W isključen

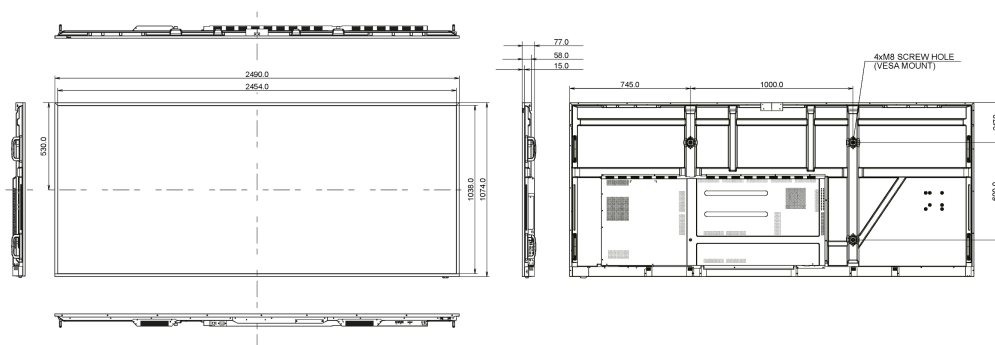





All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © **Iiyama Corporation. All Rights Reserved**