

LFD - SIGNAGE DISPLAYS

INFORMACIJE

32" Full HD monitor za Profesionalno Digitalno Oglašavanje sa 24/7 radnim vremenom i sa Android OS-om i FailOver-om




Elevate your visual communication with the LH3260HS-B1AG and unlock the new possibilities for your business. This 500cd/m² high brightness display is a powerful business tool that takes your marketing and communication efforts to the next level. With its Android 11 OS, [iiSignage²](#) content management software, Signal FailOver and [EShare](#) features, this display offers a straightforward user experience, making content creation, management, and sharing a breeze.

This ELED VA display consumes significantly less power compared to DLED IPS while maintaining the same level of brightness. Its versatile orientation, sleek design, and 24/7 reliability ensure it seamlessly integrates into any business environment. Whether it's used in retail, corporate, hospitality, or educational settings, the LH3260HS-B1AG will undoubtedly captivate your audience and leave a lasting impression.



Android OS

Zahvaljujući Android operativnom sistemu, ekran možete lako prilagoditi svojim potrebama instaliranjem aplikacija direktno na njega.

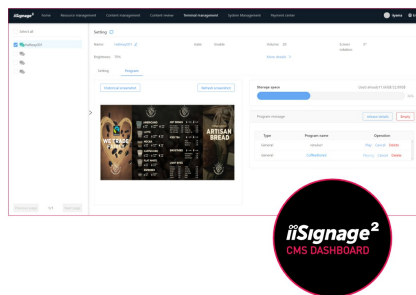

iiSignage²

iiSignage² je naša platforma za upravljanje sadržajem digitalnog oglašavanja koja lako prikazuje i kontroliše vaš sadržaj i upravlja vašim ekranima. Sistem za upravljanje sadržajem (CMS) vam daje potpunu kontrolu nad vašim porukama i oglašavanjem bezbedno i na daljinu.



Signal FailOver

FailOver je funkcija koja automatski otkriva izvore ulaza. Kada nema signala na podrazumevanom ulazu, automatski će se prebaciti na sledeći dostupni ulaz. FailOver omogućava klijentima da daju prioritet brojnim unosima (uključujući pretraživač, Media Player i Custom) i osigurava da se vaš sadržaj uvek aktivno prikazuje, obezbeđujući aktivan sadržaj u svakom trenutku.



Ultra Tanak

Sa 50 posto uštede u debljini u odnosu na slične modele, zapanjujući i najbolji u klasi displej ukupne dubine od 40 mm može se diskretno i elegantno instalirati u svim oblastima.

01 KARAKTERISTIKE EKRANA

Dizajn	Tanki okvir
Dijagonala	31.5", 80cm
Panel	VA, presvučeno staklo za smanjenje odsjaja, mat završna obrada, hard coating (3H), haze 25%
Osnovna rezolucija	1920 x 1080 @60Hz (21 Megapiksel, Full HD)
Osnovna rezolucija	60Hz
Format ekrana	16:9
Osvetljenje	500 cd/m ²
Statički kontrast	4000:1
Vreme odziva (GTG)	8ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	16.7miliona 8bit (+FCR, NTSC 87%)
Horizontalna sinhronizacija	28 - 160KHz
Vidljiva površina Š x V	698.4 x 392.85mm, 27.5 x 15.5"
Širina okvira (stranice, vrh, dno)	9mm, 9mm, 9mm
Razmak piksela	0.364mm
Boja okvra	crna, mat

02 KONEKTORI / KONTROLE

Ulaz digitalnog signala	HDMI x3 (v.2.0, max. 1920x1080 @60Hz)
Kontrolni ulaz	RS-232c x1 RJ45 (LAN) x1 IR x1
Audio izlaz	Mini konektor x1 Zvučnici 2 x 10W
HDCP	v.1.4 & 2.2
USB portovi	x2 (v.2.0)

03 KARAKTERISTIKE

Integrirani softver	Android 11 OS, iiSignage ² , FailOver, EShare
WiFi	da (Ugradni, 802.11ac)
Hardver	CPU: A53*4, GPU: G52 MP2, RAM: 2GB, ROM: 16GB
Dodatno	Wall mounting kit included (VESA 150x200mm)
Maksimalno neprekidno radno vreme	24/7
Protiv zadržavanja slike	da

Reprodukcija medija	da
Kućište (okvir)	plastika

04 OPŠTE

OSD jezici	EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL, SV, FI, DA, NB
Kontrolni tasteri	Power button, Power Indicator, Remote Sensor
Korisničke kontrole	picture (brightness, contrast, sharpness, black level, tint, colour, noise reduction, gamma selection, colour temperature, colour control, over scan, picture reset), screen (zoom mode, custom zoom, screen reset), Audio (balance, treble, bass, volume, audio out, maximum volume, minimum volume, mute, audio out sync, speaker setting, audio reset), configuration 1 (switch on state, panel saving, RS232-routing, boot on source, WOL, configuration 1 reset, factory reset), Configuration 2 (OSD timeout, OSD H-Position, OSD V-position, system rotation, information OSD, logo and animation logo setting, animation setting, monitor ID, monitor information, HDMI version, configuration 2 reset), advanced option (IR control, off timer, schedule, HDMI with one wire, HDMI with one wire power off, FailOver, language, OSD transparency, power saving, advanced option reset), Android settings (network & internet, apps & notifications, display, signage display, security, language & input, date & time, about device)
Plug&Play	DDC2B

05 MEHANIČKI

Orijentacija	pejzaž, portret
Dizajniran bez ventilatora	da
VESA montiranje	150 x 200mm
Opseg radne temperature	0°C - 40°C
Temperatura skladištenja	- 20°C - 60°C
MTBF - Prosečno vreme izmedju kvarova	50.000 sati (izuzimajući pozadinsko osvetljenje)

06 UKLJUČENI DODACI

Kablovi	Strujni kabl (1.8m), HDMI (1.8m), RS-232c (1.8m)
Upustva	kratko uputstvo, bezbednosni vodič
Ostalo	Wall mount bracket, Wall mount guide, Screws, Screw anchors, Stickers for screw holes
Daljinski upravljač	da (baterije uključene)

07 UPRAVLJANJE NAPAJANJEM

Energy Star 8.0 (POn at 230V)	26.71W
Napajanje	interna
Potrošnja energije	% 1W tipično, 0.5W stand by, 0.3W isključen

08 ODRŽIVOST

Propisi CB, CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, REACH, UKCA

**Klasa energetske
efikasnosti
(Regulation (EU)
2017/1369)**

G

REACH SVHC iznad 0,1%: olovo, olovo monoksid, dibor trioksid

09 DIMENZIJE / TEŽINA

Dimenzije proizvoda 724.6 x 419.8 x 40mm
Š x V x D

**Dimenzije kutije Š x V
x D** 795 x 520 x 115mm


Težina (bez kutije) 5.4kg

Težina (sa kutijom) 7.3kg

EAN kod 4948570122288

10 POVEZANE INFORMACIJE

Povezani proizvodi [ProLite LH4360UHS-B1AG](#), [ProLite LH5560UHS-B1AG](#), [ProLite LH6560UHS-B1AG](#),
[ProLite LH5060UHS-B1AG](#)

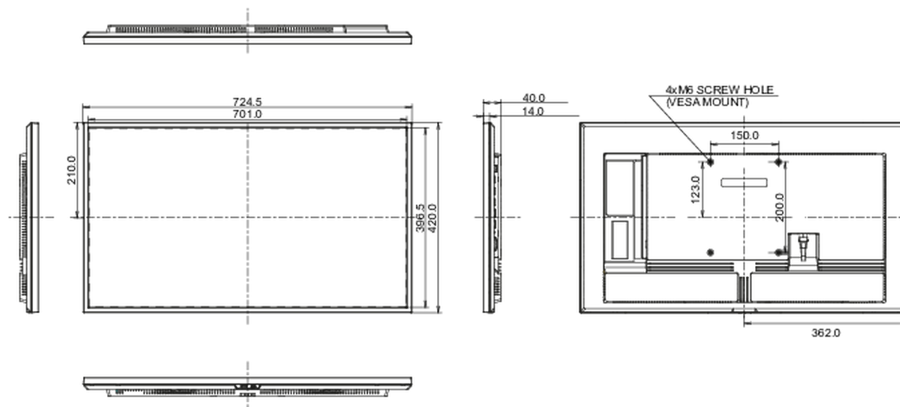





All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © **Iiyama Corporation. All Rights Reserved**