

LFD - SIGNAGE DISPLAYS

INFORMACIJE





Ultra-široki ekran 21:9



Fleksibilna orijentacija

Mogućnost pozicioniranja ekrana u pejzažnoj ili portretnoj orijentaciji znači da možete maksimalno iskoristiti svaki prostor i svojoj publici približiti svoje poruke, reklame, video zapise i bezbednosne informacije.



5K - 11 Mega Pikseli

Doživite zapanjujuće vizuelne slike sa 5KUW (5120x2160) rezolucijom, nudeći oštre i jasne slike za zaista impresivno iskustvo gledanja.



USB-C Povezivanje

Pruža najnoviji video, audio i Touch signal, sve preko jednog porta.

01 KARAKTERISTIKE EKRANA

Dijagonala	92", 233cm
Panel	VA, AG presvučeno staklo, mat završna obrada, haze 25%
Osnovna rezolucija	5120 x 2160 @60Hz (5K)
Osnovna rezolucija	60Hz
Format ekrana	21:9
Osvetljenje	500 cd/m ²
Statički kontrast	5000:1
Dinamički kontrast	5000:1
Vreme odziva (GTG)	6.5ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	1.07B (8 bit + Hi-FRC)
Horizontalna sinhronizacija	30 - 135KHz
Vidljiva površina Š x V	2141.952 x 903.636mm, 84.3 x 35.6"
Širina okvira (stranice, vrh, dno)	14.9mm, 14.9mm, 14.9mm
Razmak piksela	0.13945 x 0.41835mm

02 KONEKTORI / KONTROLE

Ulaz digitalnog signala	HDMI x1 (5120 x 2160 60Hz, HDMI 2/3/4 x3: 3840 x 2160 60Hz) DisplayPort x1 (5120 x 2160 60Hz) USB-C x1 (3840 x 2160 60Hz)
Audio ulaz	Mini konektor x1 (3.5mm)
Kontrolni ulaz	RS-232c x1 RJ45 (LAN) x2 (1000Mbps)
Digitalni izlaz signala	HDMI x1 (Max. resolution 3840 x 2160 @60Hz HDMI2,0 HDCP 1.4)
Audio izlaz	Mini konektor x1 (3.5mm) Zvučnici 2 x 20W (20W subwoofer)
Monitor kontrolni izlaz	OPS Slot x1 (Intel OPS 80pin)
USB portovi	x3 (1x Side Android only, 2x Side +2x top Public (can auto switch to current channel) USB 3.2 Gen1)
RJ45 (LAN)	x2
USB HUB	x1

03 KARAKTERISTIKE

Integrirani softver	Android 13 OS, iiyama DMS, iiyama Share, EShare
WiFi	da (WiFi 6E + BT 5.2)
Hardver	SOC: RK3588 Octo-core A76x4 + A55x4, GPU Mali G640 MP4, RAM: 8GB, ROM: 128 GB
Dodatno	1x Intel OPS 80pin

Kiosk mod	da
Maksimalno neprekidno radno vreme	24/7
Kućište (okvir)	metal

04 OPŠTE

OSD jezici	EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL, CAT, FI, DA, ET, LV, LT, HU
Kontrolni tasteri	Power key (1key with On: LED Off: , Long push(power off (LED :Red) Turn off/on backlight(Short click) Standby modus (LED :Red Flashing fast)
Korisničke kontrole	Wireless & Network(Ethernet, Wi-Fi, Hotspot, VPN, Share Network), Personal(Wallpaper), Input & Output(Sound Output Settings, Input Naming Settings, HDMI OUT Format, CEC), System(Date & Time, Language & Keyboard, Startup & Shutdown, Screen orientation, Pixel Shift, Storage, System Update, Advance Settings, Security, User Experience Improvement), About(Legal Information, Module Number, Android Version, Kernel Version, Build Number, Firmware Version, Serial Number)
Redukcija plavog svetla	da
Bez treperenja	da
Plug&Play	DDC2B

05 MEHANIČKI

Orijentacija	pejzaž, portret
VESA montiranje	800 x 600mm
Opseg radne temperature	0°C - 40°C
Temperatura skladištenja	- 20°C - 60°C

06 UKLJUČENI DODACI

Kablovi	Strujni kabl (3m), HDMI (3m), DP (3m), RS-232c (3m)
Upustva	kratko uputstvo, bezbednosni vodič
Ostalo	Guides, cable management cover, remote control, cable ties (5 units), webcam bracket, wall mount bracket, wall mount bracket set.
Daljinski upravljač	da (baterije uključene)

07 UPRAVLJANJE NAPAJANJEM

Napajanje	interna
Potrošnja energije	% 1W tipično, 0.5W stand by, 0.3W isključen

08 ODRŽIVOST

Propisi CB, CE, TÜV-Bauart, EAC, RoHS podrška, ErP, WEEE, REACH, UKCA


Klasa energetske efikasnosti (Regulation (EU) 2017/1369)	G
REACH SVHC	iznad 0.1%: Olova


09 DIMENZIJE / TEŽINA

Dimenzije proizvoda Š x V x D	2182 x 943.8 x 85.2mm
Dimenzije kutije Š x V x D	2360 x 1072 x 225mm
Zapremina palete	50pcs
Dimenzije palete Š x V x D	2380 x 1140 x 120mm
Težina (bez kutije)	44kg
Težina (sa kutijom)	63kg
EAN kod	4948570128051

10 OZNAKA ENERGETSKE EFIKASNOSTI

Proizvodjač	iiyama
Vidljiva dijagonala ekrana	233cm; 92"; (%3" segment)
Potrošnja energije u režimu ON	175W
Potrošnja u OFF modu	0.3W isključen

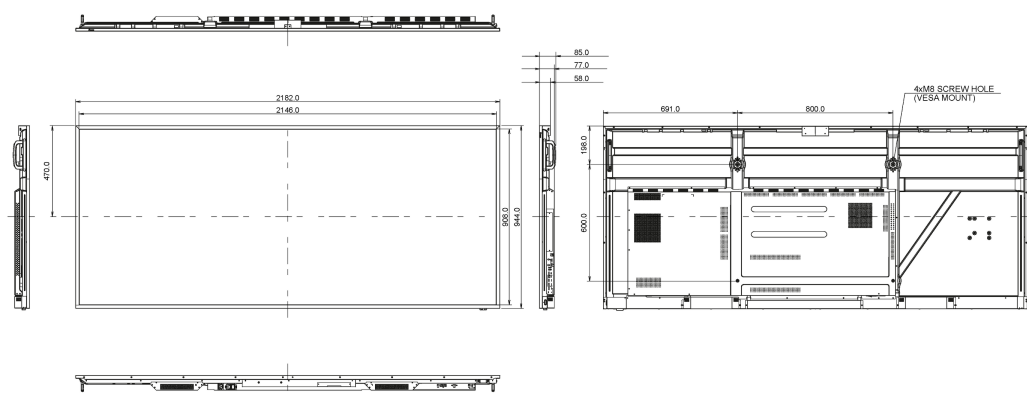

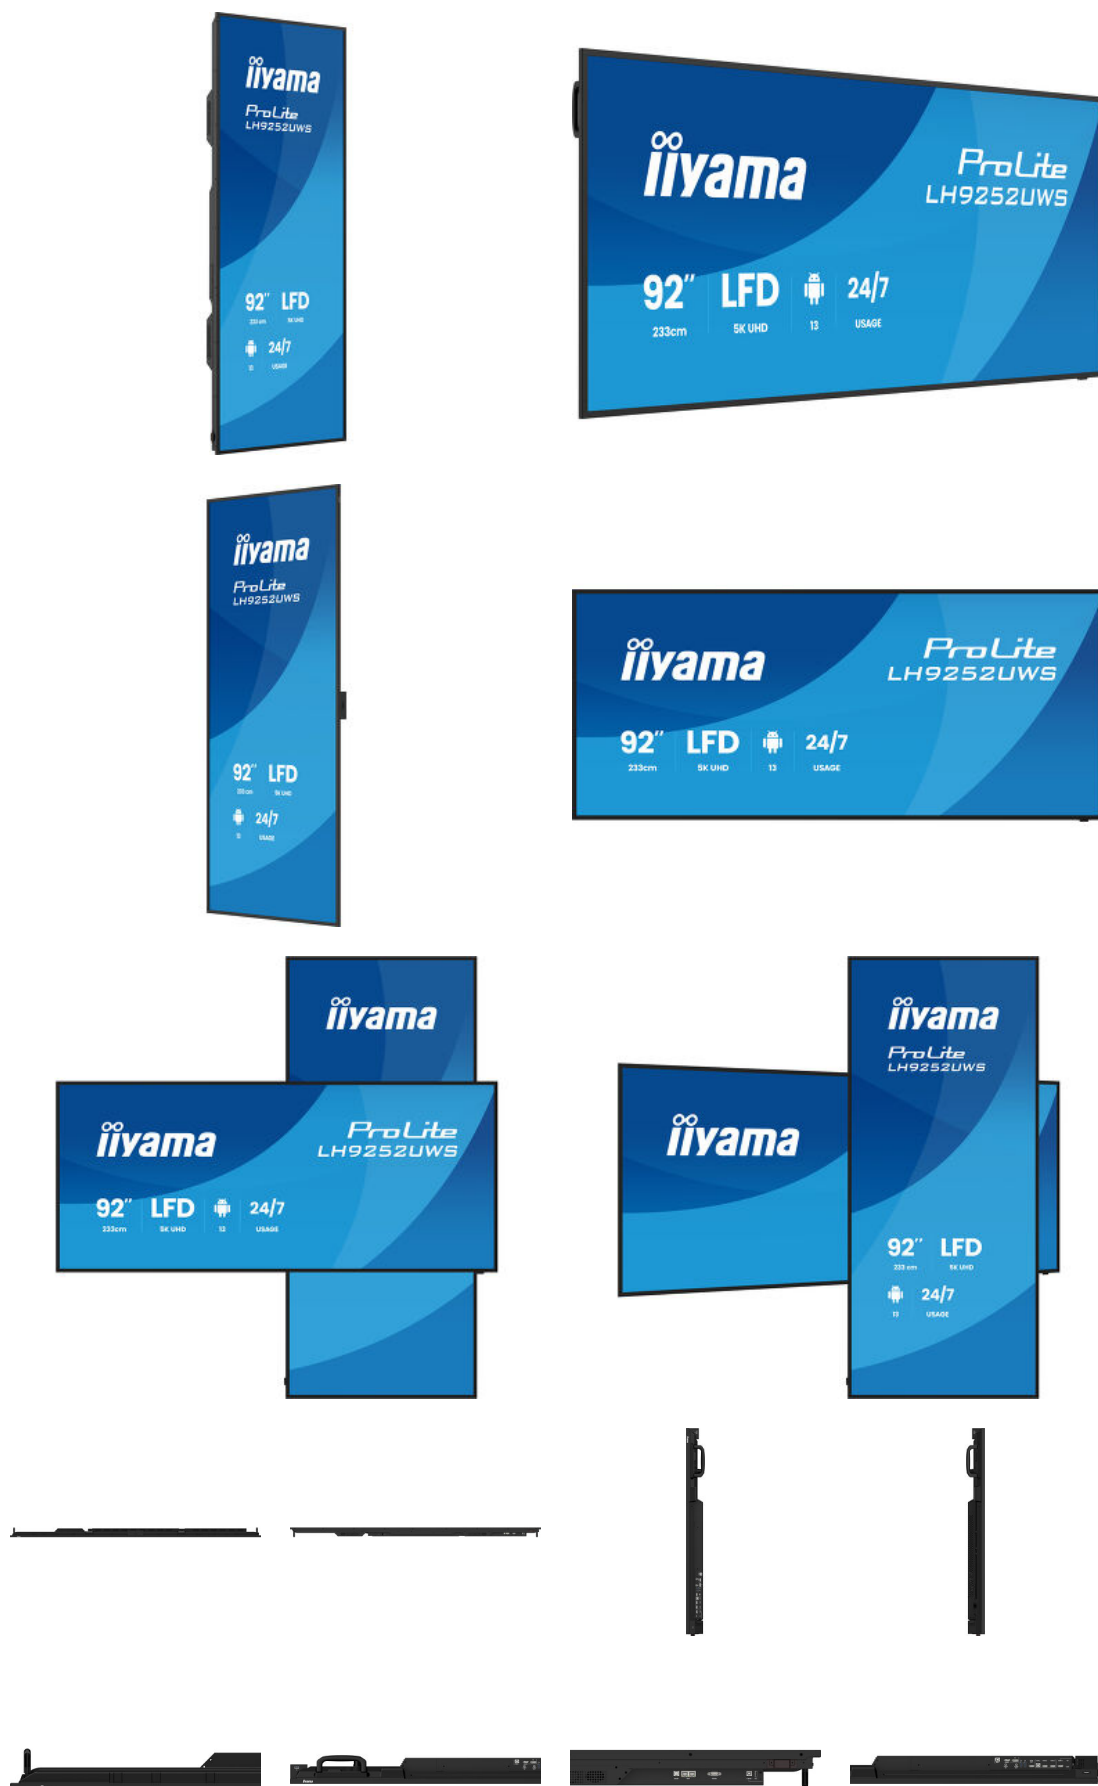



All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © **IYAMA CORPORATION. ALL RIGHTS RESERVED**