

LFD - SIGNAGE DISPLAYS**BİLGİLER****ProLite LH10552UWS-B1AG with extra-wide 105" 5K collaboration display**


The ProLite LH10552UWS-B1AG delivers stunning 5K UltraWide resolution on a 105" IPS panel, ideal for hybrid meetings, control rooms and immersive presentations. With USB-C connectivity, 100W power delivery, Android OS and integrated speakers with subwoofer, it offers a complete all-in-one solution for modern workspaces.



21:9 Ultra-Wide Screen



5K - 11 Mega Pixels

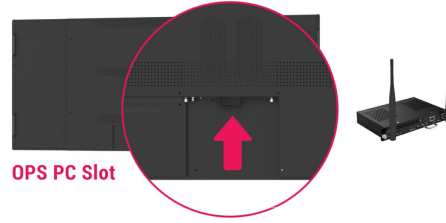

Bağımsız Çözüm

ÖZELLİKLER

01 EKRAN ÖZELLİKLERİ

Ekran Boyutu	104.6", 265.68cm
Diyagonal	265.68cm
Panel	IPS, AG coated glass, mat kaplama, haze 25%
Çözünürlük	5120 x 2160 @60Hz (5KUW)
En-Boy Oranı	21:9
Panel Parlaklığı	500 cd/m ²
Statik Kontrast	1200:1
Dinamik kontrast	5000:1
Tepki süresi (GTG)	8ms
Görüntüleme Alanı	yatay/dikey: 178°/178°, sağ/sol: 89°/89°, yukarı/aşağı: 89°/89°
Renk desteği	1.07G (8 Bits+FRC) (NTSC 85%)
Yatay Sync	30 - 135kHz
Görüntülenebilir alan G x Y	2449.92 x 1033.56mm, 96.5 x 40.7"
Çerçeve genişliği (yanlar, üst, alt)	14.9mm, 14.9mm, 14.9mm
Piksel Aralığı	0.14355 x 0.14355mm

02 ARAYÜZLER / BAĞLANTILAR / KONTROLLER

Dijital sinyal girişi	HDMI x1 (5120 x 2160 60Hz, HDMI 2/3/4 x3: 3840 x 2160 60Hz) DisplayPort x1 (5120 x 2160 60Hz) USB-C x1 (3840 x 2160 60Hz)
Ses girişi	Mini jack x1 (3.5mm)
Monitör kontrol girişi	RS-232c x1 RJ45 (LAN) x2 (1000Mbps)
Dijital sinyal çıkışı	HDMI x1 (Max. resolution 3840 x 2160 @60Hz HDMI2,0 HDCP 1.4)
Ses çıkışı	Mini jack x1 (3.5mm) Hoparlör 2 x 20W (20W subwoofer)
Monitor control output	OPS Slot x1 (65%(max) is plug in OPS)
USB Portları	x3 (2.0)
RJ45 (LAN)	x2 ((IN/OUT) 1000Mbps)

03 ÖZELLİKLER

Dahili OS	Android OS
WiFi	yes (WiFi 6E + BT 5.2)
NFC/RFID	SOC: RK3588 Octo-core A76x4 + A55x4, GPU Mali G640 MP4, RAM: 8GB, ROM: 128 GB
Ekstra	1x Intel OPS 80pin
Kiosk Modu	evet

Maks. kesintisiz çalışma süresi	24/7
Muhafaza (çerçeve)	metal

04 GENEL

OSD dilleri	EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL, CAT, FI, DA, ET, LV, LT, HU
Kontrol Düğmeleri	Power key (1key with On: LED Off: , Long push(power off (LED :Red) Turn off/on backlight(Short click) Standby modus (LED :Red Flashing fast)
Kullanıcı kontrolleri	Wireless & Network(Ethernet, Wi-Fi, Hotspot, VPN, Share Network), Personal(Wallpaper), Input & Output(Sound Output Settings, Input Naming Settings, HDMI OUT Format, CEC), System(Date & Time, Language & Keyboard, Startup & Shutdown, Screen orientation, Pixel Shift, Storage, System Update, Advance Settings, Security, User Experience Improvement), About(Legal Information, Module Number, Android Version, Kernel Version, Build Number, Firmware Version, Serial Number)
Mavi ışık azaltıcı	evet
Flicker free	evet
Plug&Play	DDC2B

05 MEKANİK

Yönlendirme	landscape, portrait
VESA montajı	1000 x 600 m8 x 25
Çalışma sıcaklığı aralığı	0°C - 40°C
Depolama sıcaklığı aralığı	- 20°C - 60°C

06 PAKET İÇERİĞİNDEKİ AKSESUARLAR

Kablolar	güç (3m), HDMI (3m), DP (3m), RS-232c (3m)
Kılavuzlar	quick start guide, safety guide
Diğer	Guides, cable management cover, remote control, cable ties (5 units), webcam bracket, wall mount bracket, wall mount bracket set.
Uzaktan kumanda	yes (batteries included)

07 GÜÇ YÖNETİMİ

Güç Kaynağı Ünitesi	internal
Güç Kaynağı	AC 100 - 240V, 50/60Hz
Güç Tüketimi	248W tipik, 0.5W stand by, 0.3W off mode

08 SÜRDÜRÜLEBİLİRLİK

Yönetmelikler	CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH, UKCA
Enerji verimliliği sınıfı (Yönetmelik (EU) 2017/1369)	G
REACH SVHC	above 0.1%: Lead

09

Kutu boyutları G x Y x D	2668 x 1233 x 280mm
--------------------------	---------------------


Palet boyutları G x Y x D	2380 x 1140 x 129mm
----------------------------------	---------------------

Ağırlık (kutu ile birlikte)	79.5kg
-----------------------------	--------

10 AB ENERJİ VERİMLİLİĞİ ETİKETİ

Görünür ekran diagonal	266cm; 105"; (%3" segment)
-----------------------------------	----------------------------

Kapalı Modunda Güç	0.3W kapalı mod
---------------------------	-----------------

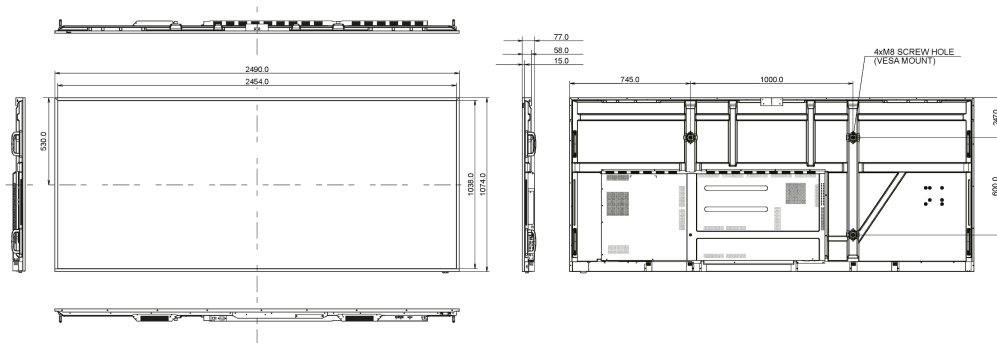





All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © IIYAMA CORPORATION. ALL RIGHTS RESERVED