



## 86" Interactive 4K LCD Touchscreen redefining Interactive display excellence

The TE8614MIS-B1AG is an extraordinary 4K UHD interactive display setting a new standard for innovation and performance. With a host of advanced features like a Zero Airgap LCD screen eliminating parallax, accurate PureTouch-IR+ with Palm Rejection, iiWare 11 with Android 13, Wifi, and the iiyama (DMS) Device management platform. Share wirelessly more easily than ever before with iiyama Share and [EShare](#) app, bringing effortless ideation and efficient collaboration in your enterprise or school.

Boasting a new 4K Interface with customizable User Profiles for simple login and access to your very own bespoke applications and Cloud Drives, the TE8614MIS-B1AG becomes a highly personalised device within a busy hybrid environment for multiple users. This display transforms collaboration, communication, engagement, making it a cornerstone for modern workplaces, educational institutions, dynamic meeting spaces and beyond.



PureTouch-IR+

PureTouch-IR+ from iiyama delivers 1mm touch accuracy for the smoothest and fastest annotation. Enjoy precise and responsive 50pt Touch technology with Touch pen recognition.



iiWare 11

Empower your presentations with iiWare 11, featuring Note, Browser, Cloud Drive via an intuitive and user-friendly software that allows you to effortlessly manage, customize, and access various applications with ease.

## 01 DISPLAY CHARACTERISTICS

Design	Thin bezel
Diagonal	85.6", 217.4cm
Panel	VA
Touch Glass	Anti-Gloss treatment, Anti-Glare glass, Matt polished surface, Ultra smooth writing, Zero Air-Gap
Native resolution	3840 x 2160 (8.3 megapixel 4K UHD)
Aspect ratio	16:9
Panel brightness	435 cd/m <sup>2</sup>
Light transmittance	92%
Static contrast	4000:1
Dynamic contrast	5000:1
Response time (GTG)	6.5ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	1.07B 10bit (8bit + Hi-FRC) (NTSC 72%)
Horizontal Sync	30 - 135kHz
Viewable area W x H	1895 x 1066mm, 74.6 x 42"
Bezel width (sides, top, bottom)	16.5mm, 16.5mm, 41mm
Pixel pitch	0.494mm
Bezel colour and finish	black, matte

## 02 TOUCH

Touch technology	PureTouch-IR <sup>+</sup>
Touch points	50, 10pt writing (HID, only with supported OS)
Touch accuracy	+/- 1mm
Touch method	stylus, finger, glove (Passive pen, Opaque objects)
Touch interface	USB
Supported operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
Palm rejection	yes

## 03 INTERFACES / CONNECTORS / CONTROLS

Digital signal input	HDMI x4 (2.0, max. 3840x2160 @60Hz, YUV420/ YUV444/ RGB444) DisplayPort x1 (2.1, max. 3840x2160 @30Hz) USB-C x2 (v.3.2 (Gen 1, 5Gbit), 3840x2160 @60Hz, RGB444   DP 1.2 Alt mode, Touch, 1x front: 100W PD , 1x back: 15W PD)
Audio input	Mini jack x1
Monitor control input	RS-232c x1 (DSUB 9pin) RJ45 (LAN) x1 (LAN Control) IR x1
Digital signal output	HDMI x1 (2.0, max. 3840x2160 @60Hz, MSD (Multi-Screen Display)) USB-C x1 (v.3.2 (Gen 1, 5Gbit), 3840x2160 @60Hz (DP 1.2 Alt mode, Touch, 5W PD, MSD (Multi-Screen Display))
Audio output	S/PDIF (Optical) x1 Mini jack x1 Speakers 2 x 18W (Facing up), 2x 8W (Front facing)
HDCP	HDMI: 2.3 + 1.4, DP: 2.3 + 1.3 USB-C: 2.3 + 1.3

<b>USB ports</b>	x6 (media playback / peripherals / storage – front side: 2x v.3.2 (Gen 1, 5Gbit), 1x USB-C v.3.2 (Gen 1, 5Gbit, 100W PD), back side: 2x v.3.2 (Gen 1, 5Gbit), 1x USB-C v.3.2 (Gen 1, 5Gbit, 15W PD))
<b>RJ45 (LAN)</b>	x2 (Auto switch for PC & Android, 1000MB)
<b>Microphone</b>	8-Array (8m voice pick-up, Front facing)

## 04 FEATURES

<b>Integrated software</b>	iiWare 11 (Android 13 OS) featuring iiyama DMS, Note, web browser, file manager, cloud drives, WPS office, iiyama Share and EShare for wireless connection with Windows/iOS/Android devices
<b>WiFi</b>	yes (WiFi 6 Module OWM002 - Dual WiFi Bandwidth: 2.4GHz/5GHz, WiFi Standard: IEEE 802.11 a/b/g/n/ac/ax, Bluetooth Support: 2.1+EDR/ 3.0/ 4.x/ 5.0)
<b>Hardware</b>	CPU: Quad core A76+A55, GPU: Mali G610 MC4, RAM: 8GB, ROM: 64GB
<b>Extra</b>	WiFi 6 Module (OWM002), Slot for optional OPS Slot PC, 4x Touch pen
<b>Kiosk mode</b>	yes
<b>Max. non-stop operating time</b>	24/7
<b>Media playback</b>	yes
<b>Glass thickness</b>	3mm
<b>Glass hardness</b>	7H
<b>Housing (bezel)</b>	metal
<b>OSD key lock</b>	yes

## 05 GENERAL

<b>OSD languages</b>	EN, DE, FR, ES, IT, RU, CZ, NL, PL, SV, FI, DA, NB
<b>Control buttons</b>	Power button, Power Indicator, Remote Sensor, Light Sensor, USB-C Connector (3.1)
<b>User controls</b>	general settings (input, volume, backlight), audio settings (volume, bass, treble, balance, sound mode, mute), screen settings (pixel shift, eye care, auto light, ECO, ECR), display settings (brightness, contrast, hue, sharpness, display mode, colour temp.), settings (wireless & networks, personal, input & output, application, system, administrator, about)
<b>Blue light reducer</b>	yes
<b>Plug&amp;Play</b>	DDC2B
<b>Warranty</b>	5 years (for details and eligible countries please check the Warranty section of our website)

## 06 MECHANICAL

<b>Orientation</b>	landscape
<b>Fanless design</b>	yes
<b>VESA mounting</b>	800 x 600mm
<b>Operation temperature range</b>	0°C - 40°C
<b>Storage temperature range</b>	- 20°C - 60°C
<b>MTBF</b>	50.000 hours (excluding backlight)

## 07 ACCESSORIES INCLUDED

<b>Cables</b>	power, USB, HDMI
<b>Touch pen</b>	x4 (Dual function tips, Anti-Bacterial)
<b>Guides</b>	quick start guide, safety guide

<b>Other</b>	WiFi 6 Module (OWM002), Mounting bracket for NUC, Mounting bracket for webcam
<b>Remote control</b>	yes (batteries included)

## 08 POWER MANAGEMENT


<b>Power supply unit</b>	internal
<b>Power supply</b>	AC 100 - 240V, 50/60Hz
<b>Power usage</b>	267W typical, 0.5W stand by, 0.3W off mode

## 09 SUSTAINABILITY

<b>Regulations</b>	CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH (RoHS)
<b>REACH SVHC</b>	above 0.1%: Lead

## 10 DIMENSIONS / WEIGHT

<b>Product dimensions W x H x D</b>	1957 x 1171 x 86mm
<b>Box dimensions W x H x D</b>	2110 x 1291 x 225mm
<b>Weight (without box)</b>	63.6kg
<b>Weight (with box)</b>	80.2kg
<b>EAN code</b>	4948570122042

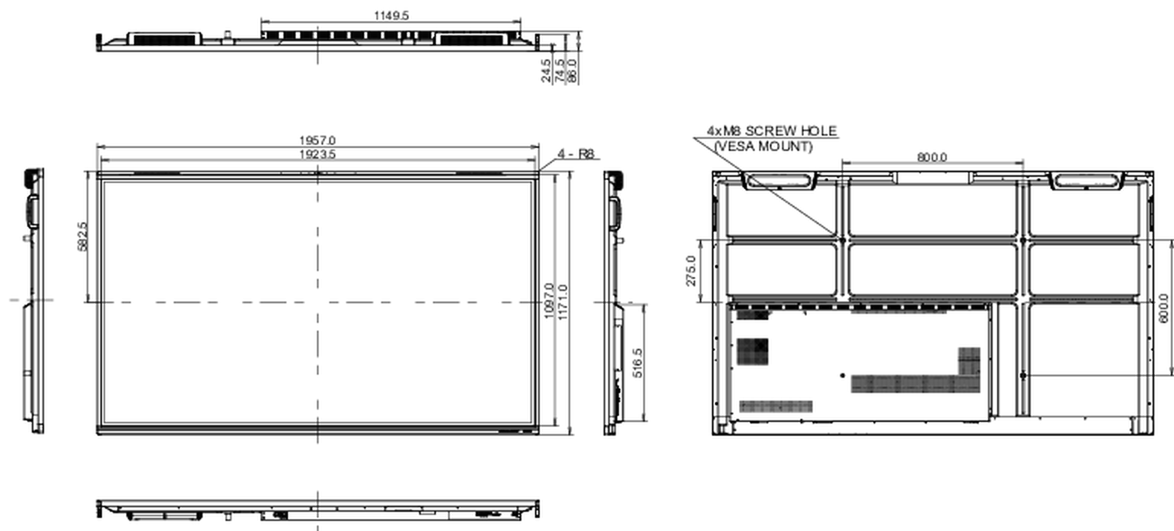

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.