



**43" Professional Digital Signage display with an 18/7 operating time and a 4K UHD resolution**

See the difference with the ProLite LE4340UHS. A professional digital signage display with 4K graphics, 18/7 operating time and landscape orientation. Featuring a slim bezel, an AMVA3 LED panel for exceptional color and image performance and iiSignage, iiyama's free signage content creation and management software, the LE4340UHS offers businesses an easy and effective solution to help capture their audience's attention.

Also available in 50 inch: [LE5040UHS-B1](#), 55 inch: [LE5540UHS-B1](#), 65 inch: [LE6540UHS-B1](#), 75 inch: [LE7540UHS-B1](#) and 86 inch: [LE8640UHS-B1](#)



**iiSignage**

With iiSignage, you can easily create, publish and manage your own digital signage content on any iiyama 40-series display from a desktop PC in the same network. Use rich content like video's and widgets to create highly impactful advertising in minutes and schedule your content across multiple displays to best match your customers' behavior.

[Read more](#)



**4K**

UHD resolution (3840x2160), better known as 4K, offers a gigantic viewable area with 4 times more information and work space than a Full HD screen. Due to the high DPI (dots per inch), it displays an incredibly sharp and crisp image.

## 01 DISPLAY CHARACTERISTICS

Design	Thin bezel
Diagonal	42.5", 107.9cm
Panel	AMVA3 LED, matte finish
Native resolution	3840 x 2160 @60Hz (8.3 megapixel 4K UHD)
Aspect ratio	16:9
Brightness	350 cd/m <sup>2</sup> typical
Static contrast	5000:1 typical
Response time	8.5ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	16.7mIn 8bit
Horizontal Sync	30 - 83KHz
Vertical Sync	50 - 76Hz
Viewable area W x H	941.2 x 529.4mm, 37.1 x 20.8"
Bezel width (sides, top, bottom)	11.9mm, 11.9mm, 14.9mm
Pixel pitch	0.315mm
Bezel colour and finish	black, matte

## 02 INTERFACES / CONNECTORS / CONTROLS

Analog signal input	VGA x1 (max. 1920x1080 @60Hz)
Digital signal input	DVI x1 (max. 1920x1080 @60Hz) HDMI x2 (max. 3840x2160 @60Hz)
Audio input	Mini jack x1
Monitor control input	RS-232c x1 RJ45 (LAN) x1 IR x1
Audio output	RCA (L/R) x1 Speakers 2 x 10W
Monitor control output	RS-232c x1 IR loop through x1
HDCP	yes
USB ports	x2 (1x v.2.0, 1x v.3.0)

## 03 FEATURES

Extra	micro SD slot
Max. non-stop operating time	18/7
Anti image retention	yes
Media playback	yes
Housing (bezel)	plastic
Integrated software	Android OS, iiSignage

## 04 GENERAL

OSD languages	EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL
Control buttons	Power, Mute, Input, Plus, Minus, Up, Down, Menu

User controls	Picture (brightness, contrast, sharpness, black level, tint, color, noise reduction, gamma selection, color temperature, color control, smart power, over scan, picture reset), Screen (H.position, V.position, clock, clock phase, zoom mode, custom zoom, auto adjust, screen reset), Audio (balance, treble, bass, volume, audio out, maximum volume, minimum volume, mute, audio source, audio reset, audio out sync), Configuration 1 (switch on state, panel saving, RS232-routing, boot on source, WOL, RGB range, Config 1 reset, factory reset), Configuration 2 ( OSD turn off, OSD H-Position, OSD V-position, information OSD, logo, monitor ID, heat status, monitor information, HDMI version, config 2 reset), Advanced option (IR control, Power LED light, keyboard control, off timer, date and time, schedule, HDMI with One Wire, language, OSD transparency, power save, advanced option reset), Android settings (ethernet, signage display, system tools, display, apps, date & time, developer options, about)
---------------	--

Plug&Play	DDC2B, Mac OSX
-----------	----------------

## 05 MECHANICAL

Orientation	landscape
Fanless design	yes
VESA mounting	200 x 200mm, 400 x 400mm
Operation temperature range	0°C - 40°C
Storage temperature range	- 20°C - 60°C
MTBF	50.000 hours (excluding backlight)

## 06 ACCESSORIES INCLUDED

Cables	power, DVI, HDMI, RS-232c
Guides	quick start guide, safety guide
Remote control	yes (batteries included)

## 07 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	120W typical, 0.5W stand by

## 08 SUSTAINABILITY

Regulations	CB, CE, TÜV-Bauart, CU
Energy efficiency class	C
Other	REACH SVHC above 0.1%: Lead

## 09 DIMENSIONS / WEIGHT

Product dimensions W x H x D	968.2 x 559.4 x 60mm
Box dimensions W x H x D	1070 x 696 x 159mm
Weight (without box)	8.7kg
Weight (with box)	11.96kg
EAN code	4948570116317

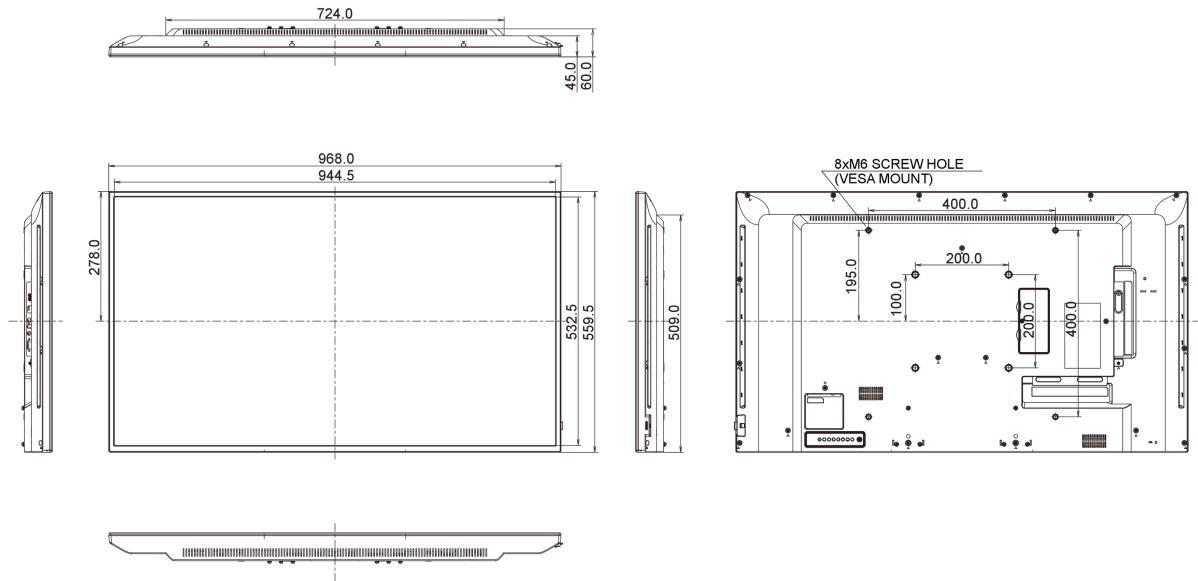

## 10 EU ENERGY EFFICIENCY LABEL

Manufacturer	iiyama
Model	ProLite LE4340UHS-B1
Energy efficiency class	C
Visible screen diagonal	108cm; 42.5"; (43" segment)
ON mode power consumption	120W
Annual energy consumption	201kWh/annum*
Power in Standby	0.5W stand by
Resolution	3840 x 2160

*This is information under Regulation (EU) No 1062/2010.\*Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.*

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED