




### 24" IPS technology panel with ultra-flat front and height adjustable stand

Stylish edge-to-edge design makes the ProLite XUB2493HS perfect for multi-monitor set-ups. The IPS panel technology offers accurate and consistent colour reproduction with wide viewing angles. High contrast and brightness values mean the monitor will provide excellent performance for photographic and web design, and the height adjustable stand ensures you can easily adjust the screen position to your preferences. It is a great choice for both multi-monitor Digital Signage and office applications.



IPS Technology

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.



HAS + Pivot

With a height adjustable stand you will create an ergonomic work posture and position that meets all health and safety requirements. This will not only prevent any health issues but will also increase your productivity. The pivot function allows the screen to rotate from landscape to portrait orientation. This functionality can be useful if the application requires more height than width.

## 01 DISPLAY CHARACTERISTICS

<b>Design</b>	ultra slim
<b>Diagonal</b>	23.8", 60.5cm
<b>Panel</b>	IPS panel technology LED, matte finish
<b>Native resolution</b>	1920 x 1080 @60Hz (2.1 megapixel Full HD)
<b>Aspect ratio</b>	16:9
<b>Panel brightness</b>	250 cd/m <sup>2</sup>
<b>Static contrast</b>	1000:1
<b>Advanced contrast</b>	5M:1
<b>Response time (GTG)</b>	4ms
<b>Viewing zone</b>	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
<b>Colour support</b>	16.7mIn (sRGB: 99%; NTSC: 72%)
<b>Horizontal Sync</b>	30 - 80kHz
<b>Viewable area W x H</b>	527.04 x 296.46mm, 20.7 x 11.7"
<b>Pixel pitch</b>	0.275mm
<b>Colour</b>	matte

## 02 INTERFACES / CONNECTORS / CONTROLS

<b>Signal input</b>	VGA x1 HDMI x1 DisplayPort x1
<b>HDCP</b>	yes
<b>Headphone connector</b>	yes

## 03 FEATURES

<b>Blue light reducer</b>	yes
<b>Flicker free</b>	yes
<b>OSD languages</b>	EN, DE, FR, ES, IT, PT, RU, JP, NL, PL
<b>Control buttons</b>	Auto Adjust/ Signal/ Exit, +/- Eco, +/- Volume/ Blue Light Reducer, Menu, Power
<b>User controls</b>	luminance (contrast, brightness, i-style Colour, ACR, Eco), image setup (clock, phase, H. position, V. position, aspect), colour settings (gamma, 6-axis, colour temperature), OSD setup (OSD H. position, OSD V. position, OSD time, language), extra (reset, DDC/CI, signal select, OD, audio source, opening logo, LED, information, volume, auto adjust)
<b>Speakers</b>	2 x 2W
<b>Convenience</b>	Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OSX

## 04 MECHANICAL

<b>Display position adjustments</b>	height, pivot (rotation), swivel, tilt
<b>Height adjustment</b>	130mm
<b>Rotation (PIVOT function)</b>	90°
<b>Swivel stand</b>	90°; 45° left; 45° right
<b>Tilt angle</b>	22° up; 5° down
<b>VESA mounting</b>	100 x 100mm

## 05 ACCESSORIES INCLUDED

**Cables**

power, HDMI

**Other**

quick start guide, safety guide

**06 POWER MANAGEMENT****Power supply unit**

internal

**Power supply**

AC 100 - 240V, 50/60Hz

**Power usage**

18.9W typical, 0.43W stand by, 0.39W off mode

**07 SUSTAINABILITY****Regulations**

CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, EPEAT, REACH, ENERGY STAR®\* (\*This model meets old ENERGY STAR® criteria only.)

**Energy efficiency class (Regulation (EU) 2017/1369)**

F

**EPEAT Silver**

EPEAT is a comprehensive environmental rating that helps identify greener computers and other electronic equipment. The Silver certification means the monitor meets all required criteria plus at least 50% of the optional requirements. EPEAT Silver is valid in countries where iiyama registers the product. Please visit [www.epeat.net](http://www.epeat.net) for the registration status in your country.

**REACH SVHC**

above 0.1%: Lead

**08 DIMENSIONS / WEIGHT****Product dimensions W x H x D**


540.5 x 366 (496) x 210mm

**Weight (without box)**

5.4kg

**EAN code**

4948570116485

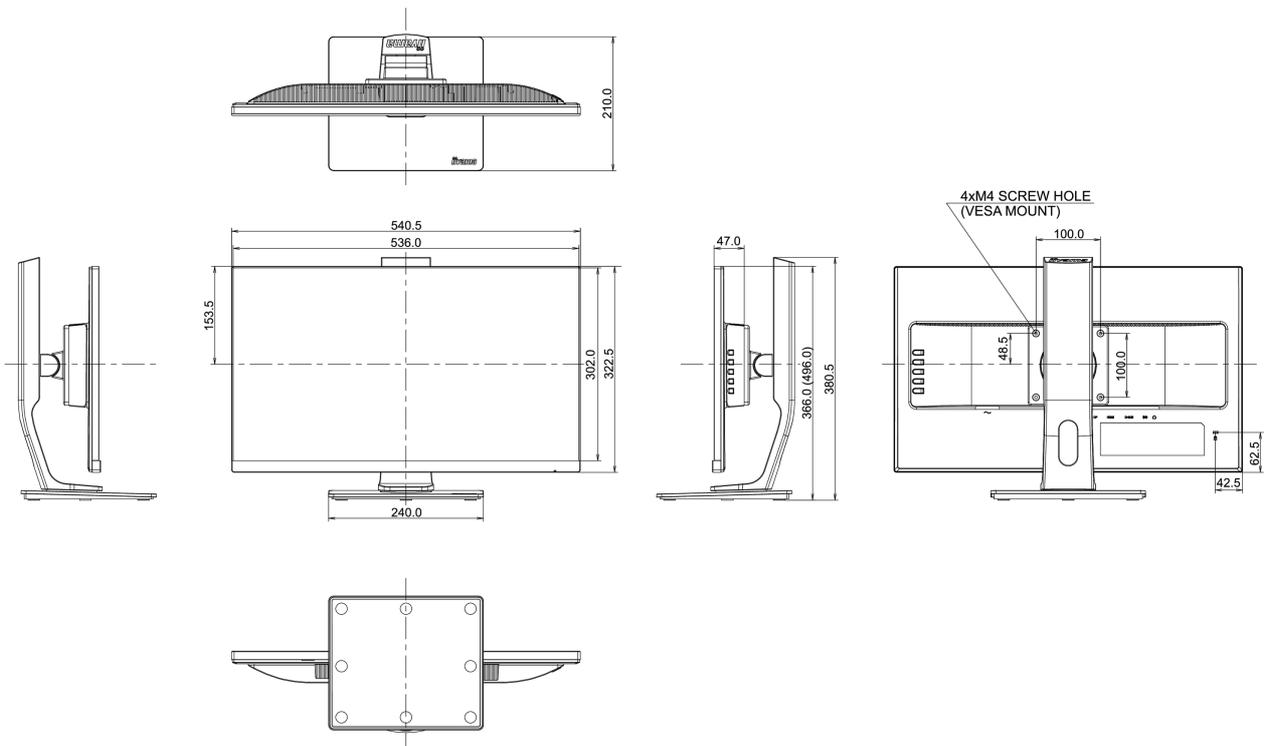

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IYAMA CORPORATION. ALL RIGHTS RESERVED